



LOW BEAM

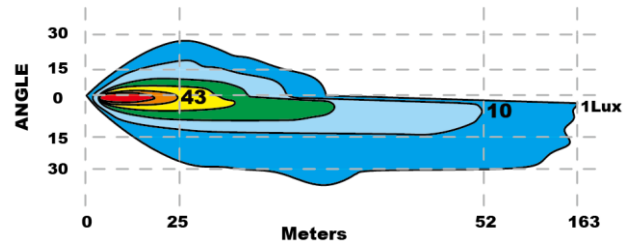

HIGH BEAM

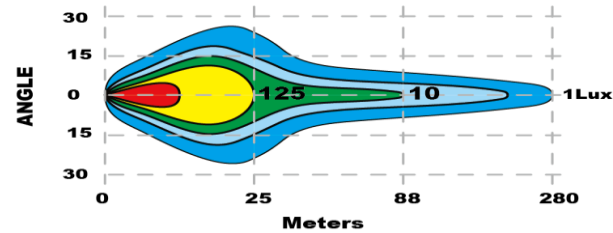

Materials:

- High / Low Beam: LP LED
- Position Light: LUMILEDS LED
- Indicator: ET1 LED
- Color Temperature: 5700K
- Die Cast Aluminum Alloy (ADC12) Heat-Sink
- Lens Material: Tempered glass
- Reflector Material: PC
- Housing: Black powder coated die cast aluminium

Features:

- High Beam/Low Beam/Position Light/Indicator
- Reference No.: 17.5
- Automatic Snow-melt and anti-icing system(patented technology)
- Reflector Facing Technology
- Dual Mount: Bottom/Back Mount
- Multi-directional mounting for indicator: Left / Right /Top Installation
- ECE R112/R7/R6 , R10, DOT, CE, RoHS
- Over / Under Voltage Protection
- Reverse Polarity Protection
- UV Resistant, ShockResistant-15G
- Waterproof rating: Comply with IP68 and IP69K
- LED Lifespan: 50,000+ Hr
- Warranty: 1 year

| Part NO. | Dimensions(mm) | Beam pattern | Power | AMP Draw (12V/24V) | Raw lumens | Effective Lumens | Peak Beam Intensity(cd) | Operating conditions: |
|-----------|----------------|----------------|----------------|--------------------|------------|------------------|-------------------------|--|
| 1605-5012 | 215*150*85 | Low Beam | 24W (2pcs*12W) | 1.7A/0.8A | 1800lm | 1500lm | 26875cd | DC 9-30V / Environment temperature -40~+60 ° C The heating function will be activated automatically when the light is on and the yellow LED indicates that the heating function is working. When the temperature of the front cover reaches approx. 40°C, the heating function is turned off automatically. |
| | | High Beam | 48W (4pcs*12W) | 3.8A/1.7A | 3600lm | 2900lm | 78125cd | |
| | | Indicator | 12W (4pcs*3W) | 0.9A/0.5A | 220lm | 150lm | | |
| | | Position Light | 3W (3pcs*1W) | 0.1A/0.05A | 160lm | 130lm | | |
| | | Heated Lens | 22W | 1.9A/0.9A | | | | |