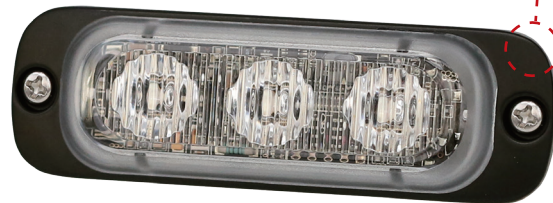
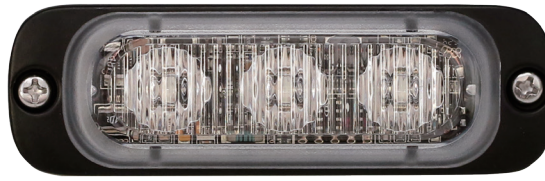


ST3 Super Thin**ECE R65 3-LED Warning Lamp
(Surface Mount)****FEATURES**

- 10.6mm super low-profile depth with powerful ECE R65 output.
- 12~24VDC operation.
- Built-in 16 flash patterns, all self-contained.
- 100,000 hours rated Long-Life LED.
- Non-volatile flash pattern memory.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.
- Slim base design for better visual aesthetic.
- Aluminium base for best durability and heat dissipation.

SPECIFICATIONS

Approval: ECE R65 Class 1 (XA1, XB1, XR1); ECE R10

IP Code: IPX8

Bulb: High-power LED x 3pcs

Warning Pattern: 16 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.3A @12VDC / 0.15A @24VDC
(varying by flash pattern)

Avg. Power: 3.55 Watt (varying by flash pattern)

Max. Current: 0.59A @12VDC / 0.3A @24VDC

Max. Power: 7.1 Watt

Wire: Red-Vcc : 26.5cm (20AWG)


Black-GND : 26.5cm (20AWG)

Yellow-Flash Pattern & Sync : 26.5cm (20AWG)

Fuse Recommended: 1A

Multi-Unit Synchronization: Up to 15 units

Available Colour: Red, Blue, Amber, White

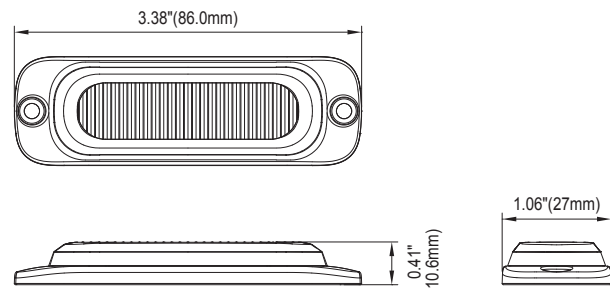DIMENSIONS**PART NO.**

- M054-0023C-00R (ECE R65, AMBER)
- M054-0023B-00R (ECE R65, BLUE)
- M054-0023R-00R (ECE R65, RED)
- M054-0033W-00R (ECE R10, WHITE)

FLASH PATTERN

Flash Pattern				
1	Double	[R65]*	9	Double
2	Single	[2Hz]	10	Triple
3	Triple	[2Hz]	11	Quad
4	Quad	[2Hz]	12	Quint
5	Random		13	Ultra
6	Steady		14	Single-Quad
7	Single		15	Single H/L
8	Mega		16	Single-Triple-Quint

*Actual approval is based on the model ordered.