STARTAX



LIGHT CATALOG

WORK LIGHTS • SEARCH LIGHTS • HEAD LIGHTS •
AUXILIARY LIGHTS • WARNING LIGHTS • FLASHLIGHTS • ACCESSORIES

2026-2027



We are not responsible for any errors in the list.



LIGHT CATALOG 2026-2027

INTRODUCTION 4-7

WORK LIGHTS

< 1000 lumens 9-11
1000-2000 lumens 12-14
2000-3000 lumens 15-18
3000-4000 lumens 19-21
4000-5000 lumens 23-24
5000+ lumens 25-28
Reversing lights 29-31
Nordic Lights 32-34
Work light bars 35-37

SEARCH LIGHTS 39-40

HEAD LIGHTS 41-44

AUXILIARY LIGHTS, ROUND

Fog lights 45
5” 45
7” 46
9” 47-48

AUXILIARY LIGHTS, BARS

E-bars 49
100-400 mm 50-51
500-600 mm 52-57
600-900 mm 58-59
1000+ mm 60

WARNING AND MARKER LIGHTS

Warning lights 61-62
Tail lights 63
Marker lights 64-65
Accessories 65

FLASHLIGHTS

Ledwise 65-69
Ledwise Work line 70-72
Accessories 72

ACCESSORIES

Support bars 73
Mounts 73
Fasteners 73
Stone covers 73
License plate brackets 74
Optibeam accessories and connection kits 75-77
Autoline connection kits 78-79
CAN BUS lighting control interfaces 80

PRODUCT LISTS 81-103



OPTIBEAM

Optibeam – Born in the darkness

In the cold and unforgiving lands of Nordic Scandinavia, it's where we are from. Born in the darkness, optimal performance, reliability, and quality. Optibeam products are designed to meet the demanding needs of professionals and motorists, increasing the safety of both driving and working in the dark. The premium Optibeam luminaires have become very popular, especially among car drivers looking for high-quality light, and the range offers a wide range of options for many applications and needs.



BULLBOY

BULLBOY AGRILINE
BULLBOY PROLINE
BULLBOY OCEANLINE

The Bullboy series luminaires are designed especially for users looking for the best lighting experience. The luminaires are designed based on the wishes of Nordic machine operators, mining professionals and other users. Bullboy lamps are equiped with only the best electronic components, optical solutions and protection classes.

High-quality LED components increase working comfort and help users to cope better in dark conditions. The maximum light output of the luminaires in the series helps to anticipate and prevent dangerous situations on construction sites. The lights in the series provide the necessary solution for every machine and vehicle, which helps to achieve the most optimal lighting system.

W-Light

The popular W-Light auxiliary lighting product family includes a comprehensive range of round and Lightbar-type LED auxiliary lights. These excellent auxiliary lights can be found for cars, vans and heavy vehicles.

W-Light luminaires offer efficient lighting and sustainable quality at a consumer-friendly price. The luminaires in the series are a great choice for the buyer of the first auxiliary light and offer really good value for money. The luminaires of W-Light are a familiar sight on the dark roads of the north. W-Light is the number one choice for the wise consumer.



LEDWISE®

Ledwise is a finnish lightning brand providing head lights and handheld lights. High quality components used in these products ensure the working in extreme conditions. Professionals, athletes, authorities and everyday users choose to use Ledwise in their activities.

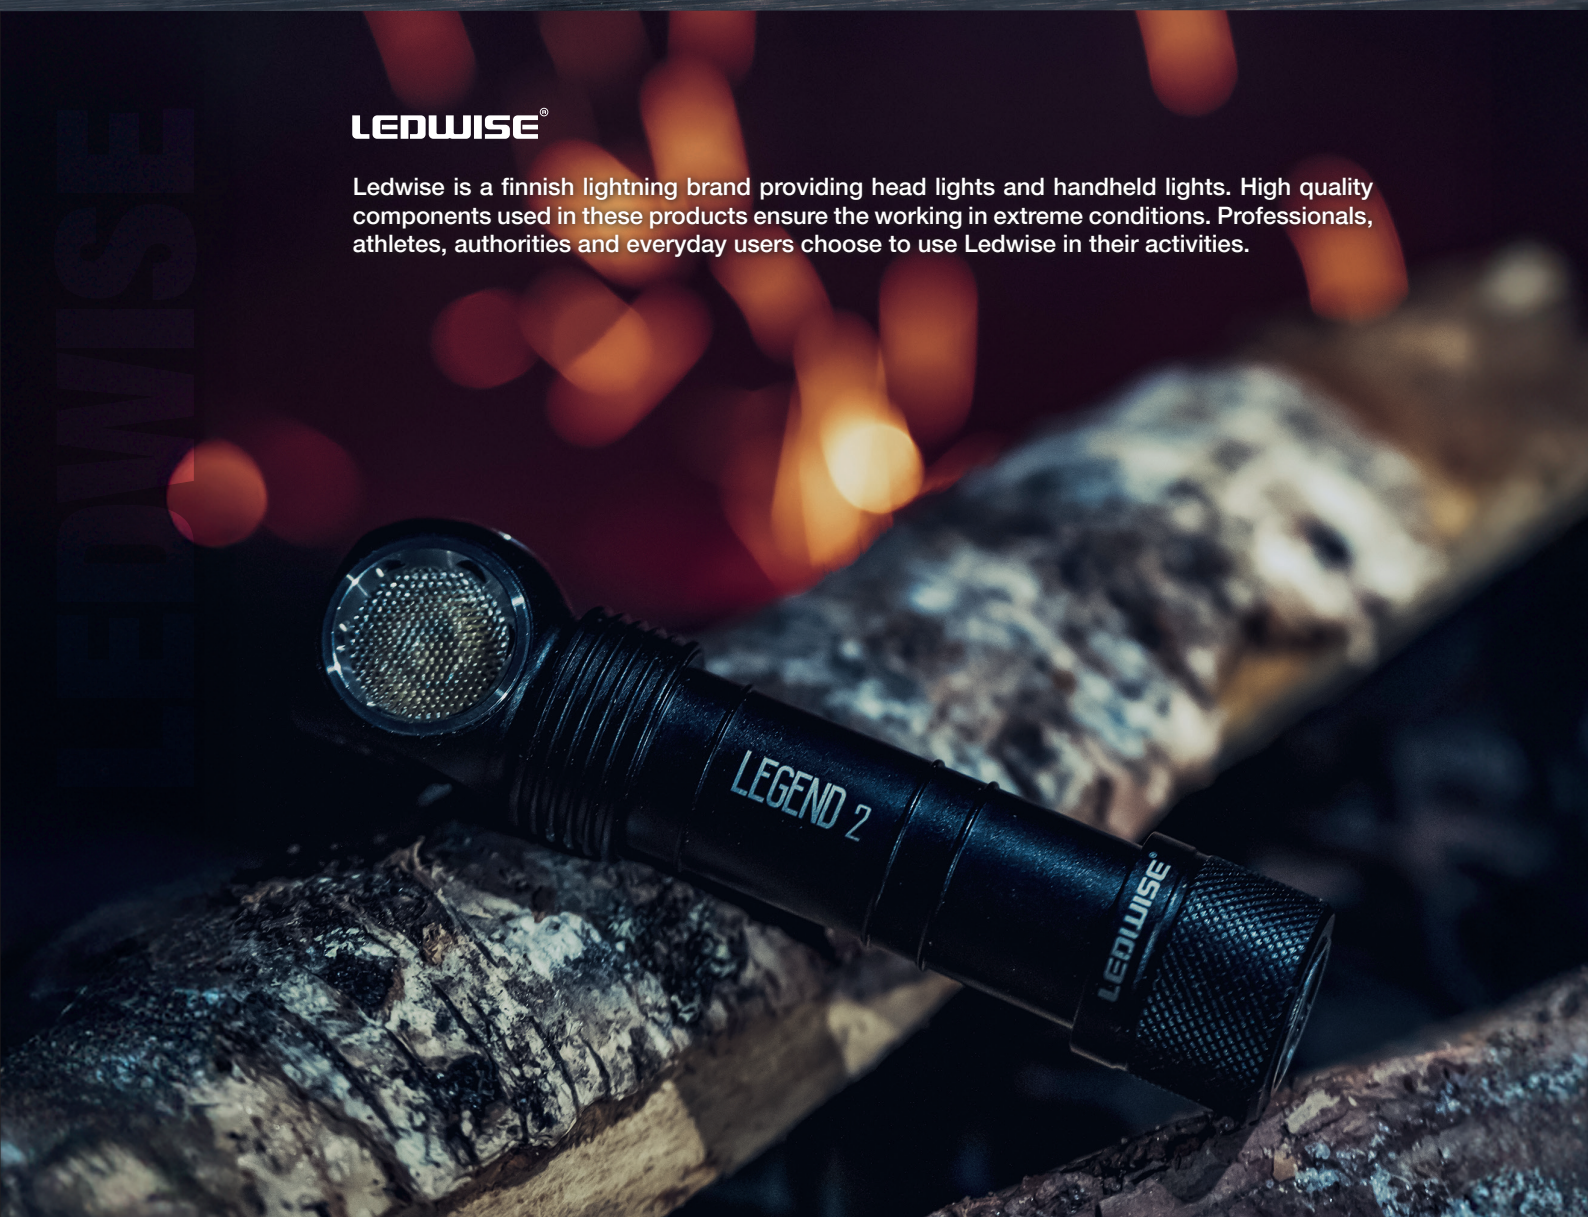

WE STAND BEHIND OUR PRODUCTS!

The secret behind our success lays in our rigorous testing process. We understand the importance of quality, especially when it comes to lighting.

So, our lights brave the harshest winter conditions of the Nordic region, enduring freezing temperatures and blistering winds.

Only the lights that pass these gruelling tests would fit into our range. All our lamp models are also tested in our light laboratory located in Lempäälä Finland.

Laboratory has two testing devices integrating sphere and isolux testing device designed especially for auxiliary and work light testing. Testing can be done in closed and stable conditions.

Both momentary and continuing testing results can be provided. In the testing premises luminaires go through testing in the fields of power usage, light quantity, lightning power, colour temperature and colour rendering values.

Isolux testing device can also provide graphic presentation of beam to demonstrate light distribution in visual form. Integreting sphere sets the luminaire in colour coordinates and shows spectral radiant flux.

Power consumption test provides ampres (A) and voltages (V) which gives real usage power (W). Usually work and auxiliary light specs show nominal power (nominal **maximum LED power) which should not be mistaken with real use wattage.**



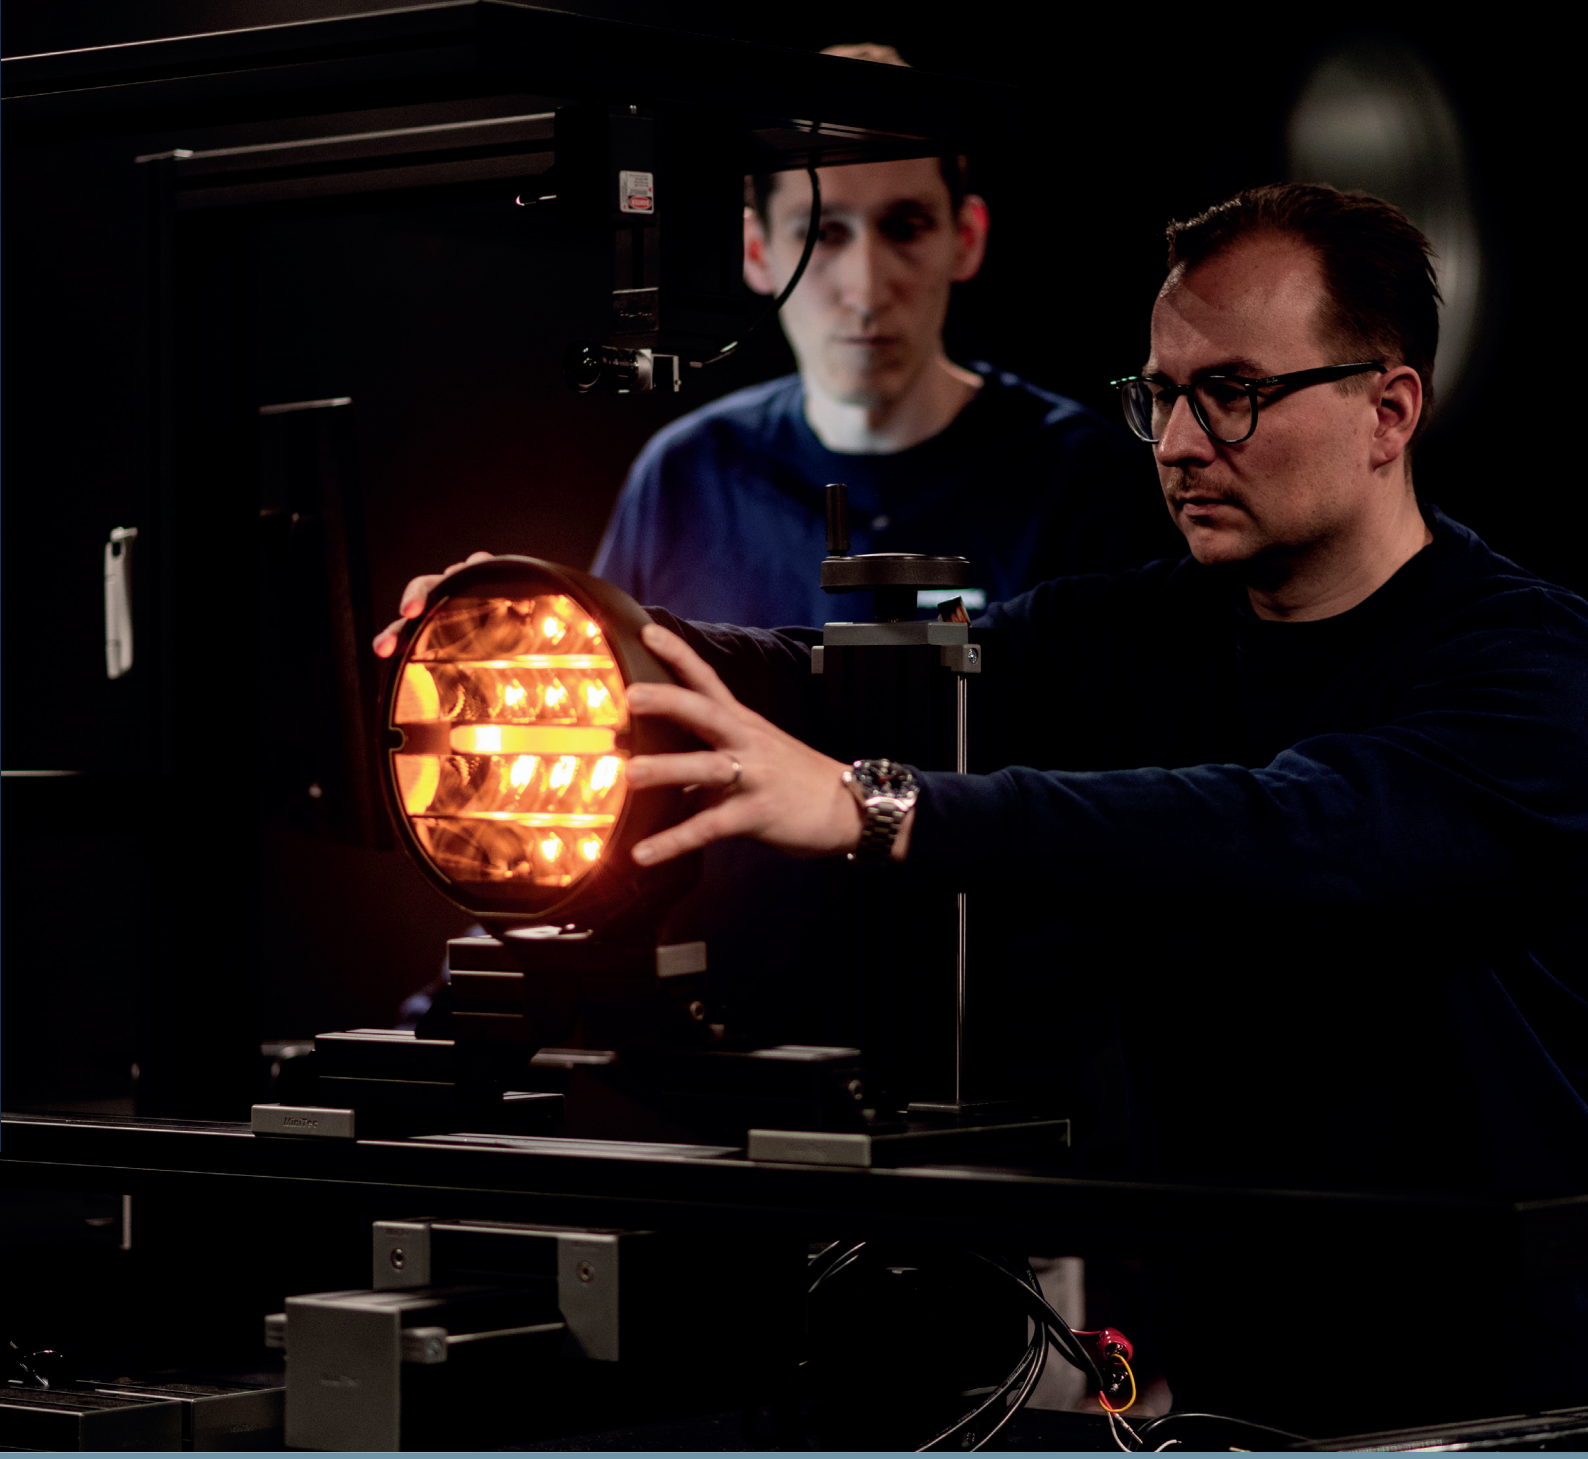

LIGHT INFO

Lumen

The lumen is the unit of luminous flux, a measure of the total quantity of visible light. All our lamps have been tested in our laboratory and we stand behind our tested real values. Pay attention that theoretical lumen value may differ a lot from the real tested value.

Distance

Our beam pattern test shows cross section of the beam shape width and length. Isolux table shows beam lux distances (lx @ m). Test also provides the ratio between powerful light and ambient light. Lightning power test provides lightning intensity in candles (cd).

Colour temperature

Colour temperature measurement provides colour temperature in Kelvins (K) and colour rendering index (CRI) which values how natural colours look in the beam. For our products we have chosen colour temperatures between 4500 K to 6000 K (depending on product) to provide maximum safety and eye-friendly driving experience.

Power consumption

We talk only about real power consumption. Theoretical wattage power tells nothing about the light output. Pay high attention when comparing different products in the market.

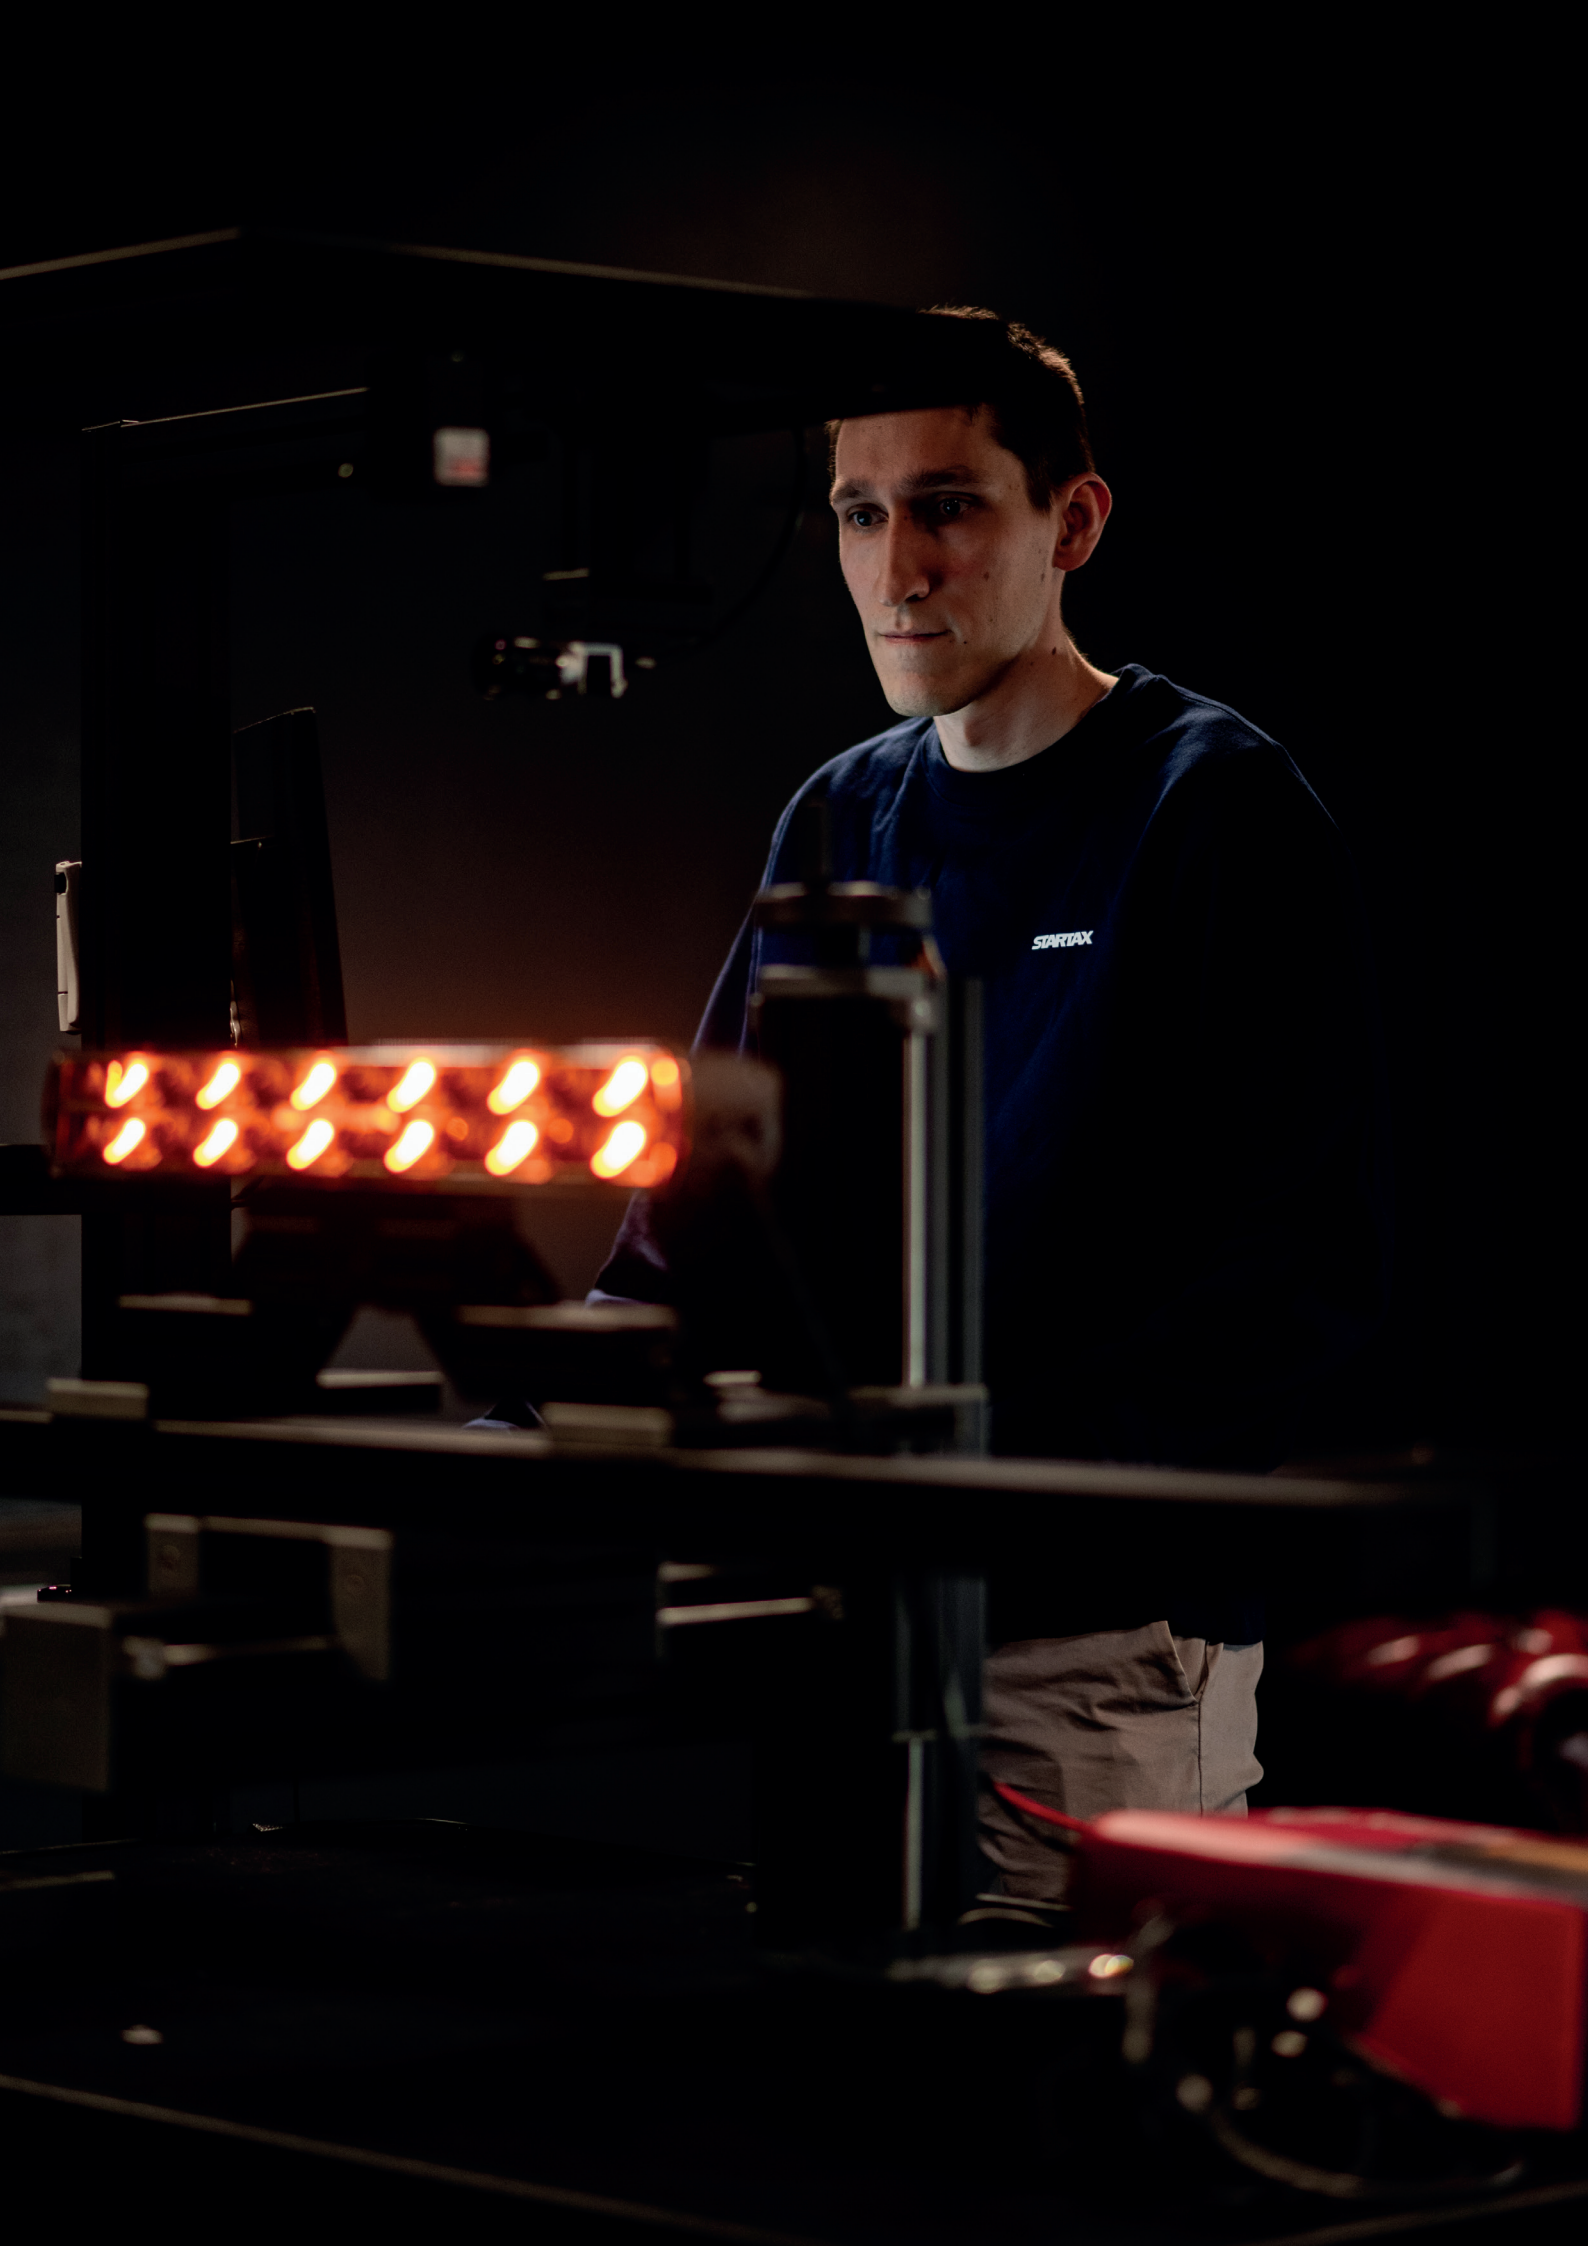
STARTAX

WORK LIGHTS

< 1000 lm

OPTIBEAM

Small is beautiful, but also efficient. This rock-solid product is perfect for local area lighting, for example, to assist in reversing or to implement interior lighting, as a step light, in the engine compartment, or as an underbody light. Thanks to its extremely wide beam pattern and striking yet sleek design, this light is extremely versatile. The product includes three different mounting rubbers, providing nearly limitless installation possibilities. This product doesn't shy away from harsh conditions due to its high IP68 rating.



OPTIBEAM ROCK

590 lm, 9 W.

Input voltage	10-30 V
Power consumption	0,48 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	900 lm / 590 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	100 cm
Size (W x H x D)	76,6 x 46,3 x 23,9 (11,3) mm
Approvals	R10

1603-300753



BULLBOY PROLINE

NEW ARRIVAL



BULLBOY PROLINE MINI

400 lm, 9W+6W. Scene close-up work light, reversing light and warning light, all in one package. Wide light pattern, direct mounting from the rear. Approved as a reversing light.

Input voltage	10-30 V
Power consumption	0,29 A @ 13,7 V
LED	6 x white work light LEDs + 6 x amber warning light LEDs
Lumens (theor. / tested)	630 lm / 400 lm
Color temperature	5300 K
IP rating	IP67/ IP69K
Cable / connection	50 cm, 3-pin. open cable ends
Size (W x H x D)	79 x 49 x 24 mm
Approvals	R148, R10, R65 class 1

1603-300815



BULLBOY PROLINE



BULLBOY PROLINE

580 lm, 5 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-30 V
Power consumption	0,43 A @ 13,7 V
LED	3 x LED
Lumens (theor. / tested)	680 lm / 580 lm
Color temperature	5400 K
IP rating	IP67/ IP69K
Cable / connection	20 cm
Size (W x H x D)	57,6 x 32,6 x 23,8 mm
Approvals	R148, R10

1603-300802



< 1000 lm



BULLBOY AGRILINE

379 lm, 12 W. Blue colored sprayer light pair.

Input voltage	10-30 V
Power consumption	0,97 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	800 lm / 379 lm
Color temperature	-
IP rating	IP67
Cable / connection	30 cm
Size (W x H x D)	85 x 85 (118) x 38 mm
Approvals	-

1603-300285





BULLBOY AGRILINE

547 lm, 10 W. Bar and bolt mounting.

Input voltage	12-48 V
Power consumption	0,58 A @ 13,7 V
LED	1 x LED
Lumens (theor. / tested)	1000 lm / 547 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	25 cm, DT-plug
Size (W x H x D)	Ø 57x 65 mm
Approvals	-

1603-300409





BULLBOY

728 lm, 9 W. Scene light.

Input voltage	12-24 V
Power consumption	0,61 A @ 13,7 V
LED	9 x LED
Lumens (theor. / tested)	770 lm / 728 lm
Color temperature	5000 K
IP rating	IP67
Cable / connection	40 cm
Size (W x H x D)	129 x 68 x 50 mm
Approvals	R10

1603-300290 (white)
1603-300293 (black)





BULLBOY AGRILINE

989 lm, 18 W. Approved as a reversing light.

Input voltage	9-32 V
Power consumption	0,96 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	1440 lm / 989 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	15 cm
Size (W x H x D)	150 x 53 x 56 mm
Approvals	R23, R10

1603-300262





BULLBOY



BULLBOY

521 lm, 15 W.

Input voltage	9-32 V
Power consumption	0,75 A @ 13,7 V
LED	5 x LED
Lumens (theor. / tested)	1000 lm / 521 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	30 cm
Size (W x H x D)	110 x 43 x 135 mm
Approvals	-

1603-300823



BULLBOY



BULLBOY

612 lm, 18 W.

Input voltage	9-32 V
Power consumption	0,81 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	1170 lm / 612 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	20 cm
Size (W x H x D)	160 x 45 x 70 mm
Approvals	-

1603-300825



eco



ECOLINE

732 lm, 15 W.

Input voltage	10-30 V
Power consumption	0,92 A @ 13,7 V
LED	5 x LED
Lumens (theor. / tested)	800 lm / 732 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	25 cm
Size (W x H x D)	85 x 85 (118) x 38 mm
Approvals	R10

1603-300305



1000-2000 lm



BULLBOY PROLINE



BULLBOY PROLINE

1153 lm, 20 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-36 V
Power consumption	0,99 A @ 13,7 V
LED	13 x LED
Lumens (theor. / tested)	1284 lm / 1153 lm
Color temperature	5700 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	114 x 146 x 52 mm
Approvals	R23, R10, ADR

1603-300270



BULLBOY PROLINE



BULLBOY PROLINE

1350 lm, 18 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-30 V
Power consumption	1,00 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	2000 lm / 1350 lm
Color temperature	5400 K
IP rating	IP67 / IP69K
Cable / connection	15 cm, integrated DT-plug downward
Size (W x H x D)	75 x 75 x 39,5 mm
Approvals	R148, R10

1603-300801



BULLBOY PROLINE



BULLBOY PROLINE

1410 lm, 12 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-30 V
Power consumption	0,95 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	2000 lm / 1410 lm
Color temperature	5400 K
IP rating	IP67 / IP69K
Cable / connection	15 cm, integrated DT-plug sideways
Size (W x H x D)	157,2 x 39,2 x 40,2 mm
Approvals	R148, R10

1603-300803



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SLIM 12

1430 lm, 12 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	0,89 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	2500 lm / 1430 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	45 cm, open cable ends
Size (W x H x D)	157 x 39 x 50 (52) mm
Approvals	R10, R23

1603-300235



1000-2000 lm



BULLBOY PROLINE

1771 lm, 25 W.

Input voltage	9-36 V
Power consumption	1,25 A @ 13,7 V
LED	5 x LED
Lumens (theor. / tested)	2250 lm / 1771 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	45 cm, DT-plug
Size (W x H x D)	139 x 45 x 70 mm
Approvals	R10

1603-300363 (black)
1603-300328 (white)





BULLBOY PROLINE MINI

1970 lm, 30 W. Approved as a reversing light.

NEW ARRIVAL

Input voltage	10-30 V DC
Power consumption	1,89 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	2800 lm / 1970 lm
Color temperature	6000 K
IP rating	IP68/69
Cable / connection	60 cm, 2-pin. DT
Size (W x H x D)	100 (115,5) x 19 x 42 (53,7) mm
Approvals	R148, R10

1603-300814





BULLBOY AGRILINE

1200 lm, 20 W. With pipe mount.

Input voltage	9-32 V
Power consumption	1,24 A @ 13,7 V
LED	1 x LED
Lumens (theor. / tested)	2500 lm / 1200 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	40 cm, DT-plug
Size (W x H x D)	59 x 59 x 55 mm
Approvals	R10, CISPR25 Class 4

1603-300799





BULLBOY AGRILINE

1200 lm, 20 W. With pipe mount.

Input voltage	9-32 V
Power consumption	1,20 A @ 13,7 V
LED	1 x LED
Lumens (theor. / tested)	2500 lm / 1200 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	40 cm, DT-plug
Size (W x H x D)	59 x 59 x 55 mm
Approvals	R10, CISPR25 Class 4

1603-300800



1000-2000 lm



BULLBOY



BULLBOY

1475 lm, 18 W. Scene light.

Input voltage	12-24 V
Power consumption	1,33 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	1500 lm / 1475 lm
Color temperature	5000 K
IP rating	IP67
Cable / connection	40 cm
Size (W x H x D)	229 x 68 x 50 mm
Approvals	R10

1603-300291 (white)
1603-300294 (black)



BULLBOY

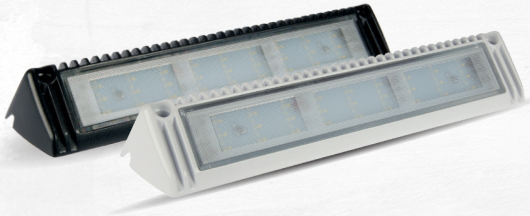

BULLBOY

1994 lm, 27 W. Scene light.

Input voltage	12-24 V
Power consumption	1,98 A @ 13,7 V
LED	27 x LED
Lumens (theor. / tested)	2300 lm / 1994 lm
Color temperature	5000 K
IP rating	IP67
Cable / connection	40 cm
Size (W x H x D)	329 x 68 x 50 mm
Approvals	R10

1603-300292 (white)
1603-300295 (black)





BULLBOY

1274 lm, 27 W.

Input voltage	9-32 V
Power consumption	1,04 A @ 13,7 V
LED	9 x LED
Lumens (theor. / tested)	1800 lm / 1274 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	28 cm
Size (W x H x D)	116 x 43 x 135 mm
Approvals	R10

1603-300824





2000-3000 lm

NEW ARRIVAL

OPTIBEAM



OPTIBEAM ELITES 3

2700 lm. 36 W. Approved as a reversing light.

Input voltage	9-32 V
Power consumption	2,40 A @ 13,7 V
LED	24 x LED
Lumens (tested)	2700 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Built-in DT
Size (W x H x D)	78 x 78 (85) x 41 mm
Approvals	R148, R10, CISPR 25 Class 4

1603-300826

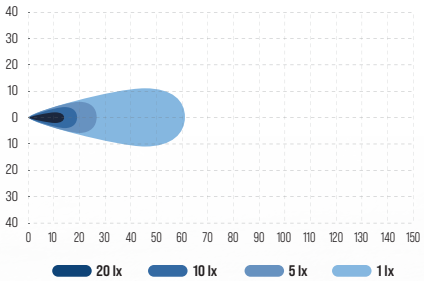

OPTIBEAM

The Optibeam SlimX work light is the most powerful, low-profile light cannon in its size class and equipped with a ECE R65 warning light. The real lumen output reaches a remarkable high 2750 lumens and the Xfrost coating of the lens distributes the light evenly over the entire working area. The lamp has a special coating that is more resistant to corrosion and has an IP68 classification for water tightness. The color temperature of the lamp is optimized to 5300 Kelvin, which guarantees a pleasant experience for the eyes even when working for longer periods of time. The extremely low-profile mounting bracket ensures a remarkably low and unobtrusive installation, and the bracket is applicable for both bottom and top mounting. The lamp is approved for vehicle use as ECE R10 and the interference protection class is CISPR class 3. As a guarantee of quality, Optibeam work lights are granted a three-year warranty.



OPTIBEAM SLIMX FLASH

2760 lm.

Input voltage	9-36 V
Power consumption	2,30 A @ 13,7 V
LED	6 + 6 LED
Lumens (theor. / tested)	3060 lm / 2760 lm
Color temperature	5300 K
IP rating	IP68
Cable / connection	30 cm, open cable ends
Size (W x H x D)	157 x 47 x 68 (90) mm
Approvals	R10, R65

1603-300769



OPTIBEAM



OPTIBEAM SLIMX AMBIENT

2760 lm. With amber and red ambient light.

Input voltage	9-36 V
Power consumption	2,30 A @ 13,7 V
LED	6 + 6 LED
Lumens (theor. / tested)	3060 lm / 2760 lm
Color temperature	5300 K
IP rating	IP68
Cable / connection	30 cm, open cable ends
Size (W x H x D)	157 x 47 x 68 (90) mm
Approvals	R148 (red rear position light), R10

1603-300768



2000-3000 lm



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SLIM 18

2150 lm, 18 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	1,64 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	2500 lm / 2150 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Open cable ends
Size (W x H x D)	157 x 39 x 50 (52) mm
Approvals	R23, R10

1603-300236



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM ELLIPSE 24

2650 lm, 24 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	1,67 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	3600 lm / 2650 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	75 x 68 x 41 mm
Approvals	R23, R10

1603-300230



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SQUARE 24

2750 lm, 24 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	1,73 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	3600 lm / 2750 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	70 x 70 x 41 mm
Approvals	R23, R10

1603-300231



2000-3000 lm



BULLBOY AGRILINE

2400 lm, 35 W.

Input voltage	9-36 V
Power consumption	1,70 A @ 13,7 V
LED	7 x LED
Lumens (theor. / tested)	2790 lm / 2400 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	45 cm, DT-plug
Size (W x H x D)	111 x 111 (126) x 69 mm
Approvals	R10

1603-300359





BULLBOY AGRILINE

2657 lm, 45 W. For Massey Ferguson 5400, 5600, 6400, 6600, 7400, 7600 ja 8400 -series.

Input voltage	10-30 V
Power consumption	2,29 A @ 13,7 V
LED	15 x LED
Lumens (theor. / tested)	2710 lm / 2657 lm
Color temperature	6000 K
IP rating	IP6K9K
Cable / connection	45 cm, 3-pin.
Size (W x H x D)	166 x 64,7 x 106,2 mm
Approvals	-

1603-300198





BULLBOY AGRILINE

2737 lm, 40 W. For John Deere 6R, 7R, 8R -series tractors and for S, T and W -series harvesters.

Input voltage	9-32 V
Power consumption	2,22 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	3113 lm / 2737 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	10 cm, AMP-plug
Size (W x H x D)	176,4 x 117,2 x 80,1 mm
Approvals	-

1603-300199



2000-3000 lm



BULLBOY AGRILINE

2810 lm, 45 W. Extremely wide 170° light pattern.

Input voltage	9-32 V
Power consumption	2,56 A @ 13,7 V
LED	3 x LED
Lumens (theor. / tested)	3200 lm / 2810 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	23 cm, DT-plug
Size (W x H x D)	Ø 85 x 115 x 75 mm
Approvals	CISPR25 class 4, R10

1603-300193





BULLBOY AGRILINE

2853 lm, 40 W. Replaces most of the side-mounted OE worklamps. Includes U-bracket and 35 mm and 45 mm side mounting pieces.

Input voltage	9-36 V
Power consumption	2,09 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	4500 lm / 2853 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	45 cm, DT-plug
Size (W x H x D)	151 x 89,9 x 101,8 mm
Approvals	R10

1603-300369





BULLBOY AGRILINE

2913 lm, 40 W.

Input voltage	9-32 V
Power consumption	2,70 A @ 12 V
LED	4 x LED
Lumens (theor. / tested)	3200 lm / 2913 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug + 50 cm cable
Size (W x H x D)	78 x 72 (103) x 57 mm
Approvals	R10, CISPR25 class 4

1603-300240





BULLBOY

2495 lm, 48 W.

Input voltage	9-32 V
Power consumption	2,24 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	3300 lm / 2495 lm
Color temperature	5000 K
IP rating	IP67
Cable / connection	20 cm
Size (W x H x D)	108 x 108 (128) x 68 mm
Approvals	-

1603-300384



3000-4000 lm



Optibeam Snowb – versatile performance for demanding conditions

Optibeam Snowb is designed to meet the needs of the most demanding professionals and enthusiasts in all weather conditions. Its advanced Multikelvin technology allows you to adjust the color temperature according to the situation. You can choose a cool white color temperature for clear conditions, or a warmer tone to enhance contrast in fog, rain, and snowfall. One work light, countless possibilities.

The heated lens (1603-300770) effectively prevents the formation of ice and frost, ensuring consistent light output and clear visibility even in the harshest winter conditions. The intelligent heating function activates automatically with its own control system.

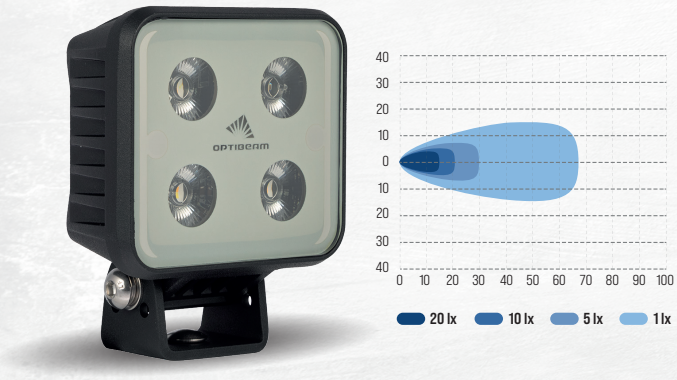

OPTIBEAM, SNOWB HEATED

3400 lm (4000 K), 80 W. Heating, color temperature adjustment, memory function for the last used color setting.

Input voltage	9-36 V
Power consumption	3000 K: 3,34 A @ 13,7 V 4000 K: 4,13 A @ 13,7 V 5700 K: 3,26 @ 13,7 V
Lumens (tested)	3000 K: 2400 lm 4000 K: 3400 lm 5700 K: 2600 lm
Color temperature	3000 K / 4000 K / 5700 K
IP rating	IP68 / IP69K
Cable / connection	4-pin. DT connector
Size (W x H x D)	100 x 90 (119) x 45 mm
Approvals	R10

1603-300770

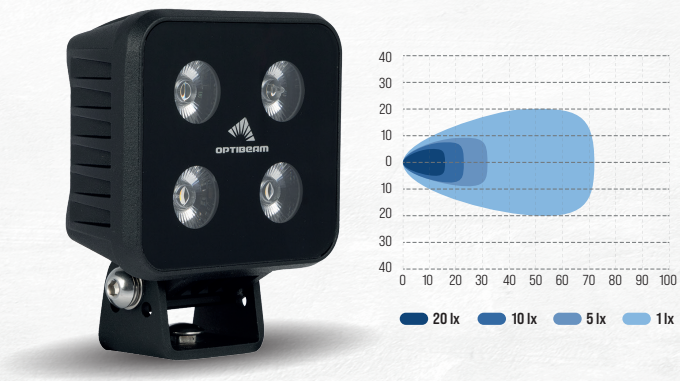

OPTIBEAM, SNOWB

3700 lm (4000 K), 80 W. Color temperature adjustment, memory function for the last used color setting.

Input voltage	9-36 V
Power consumption	3000 K: 2,97 A @ 13,7 V 4000 K: 4,24 A @ 13,7 V 5700 K: 2,91 A @ 13,7 V
Lumens (tested)	3000 K: 2400 lm 4000 K: 3700 lm 5700 K: 2600 lm
Color temperature	3000 K / 4000 K / 5700 K
IP rating	IP68 / IP69K
Cable / connection	3-pin. DT connector
Size (W x H x D)	100 x 90 (119) x 45 mm
Approvals	R10

1603-300771

3000-4000 lm



BULLBOY PROLINE

The work lights of the Bullboy Proline Bully series are a real choice for professionals as work lights. The lamps made of high-quality materials are designed using the latest components, and the size-power ratio of the lamps is excellent. The 3340 lm laboratory measured lumens of the very compact Bully 3000 lamp is best in size class and the 5500 K natural color temperature works in all conditions and applications. The modern design with a frameless lens makes the lamp easier to clean and gives it a design that stands out from the crowd. IP69K protection rating, guarantees that the lamps can also be cleaned with high-pressure washing without worrying about water tightness. The two-year warranty granted to the Bullboy Proline Bully series lamps proves the quality of Bullboy Proline products.



BULLBOY PROLINE BULLY 3000

3340 lm, 40 W.

Input voltage	12-48 V DC
Power consumption	2,40 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	3700 lm / 3340 lm
Color temperature	5500 K
IP rating	IP67/69K
Cable / connection	DT-plug
Size (W x H x D)	76 x 76 (92) x 63 mm
Approvals	R10

1603-300727



BULLBOY AGRILINE



BULLBOY AGRILINE

3010 lm, 48 W.

Input voltage	11-32 V DC
Power consumption	2,68 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	4200 lm / 3010 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	30 cm, open cable ends
Size (W x H x D)	109 x 109 x 33 (38) mm
Approvals	R10

1603-300239





3000-4000 lm

BULLBOY AGRILINE

3010 lm, 40 W.



Input voltage	10-30 V DC
Power consumption	2,90 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	4800 lm / 3010 lm
Color temperature	5500 K
IP rating	IP67
Cable / connection	50 cm, open cable ends
Size (W x H x D)	123 (78) x 89 (72) x 70 (60) mm
Approvals	R10

1603-300237



BULLBOY AGRILINE

3500 lm, 60 W. Suitable for John Deere 6M/6020/6030/5020/5M/5R -models.



Input voltage	9-32 V
Power consumption	3,39 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	6000 lm / 3500 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	Integrated DT-plug
Size (W x H x D)	110 x 120 (142) x 96 mm
Approvals	R10

1603-300195



BULLBOY AGRILINE

3827 lm, 50 W.



Input voltage	9-32 V
Power consumption	3,38 A @ 13,7 V
LED	5 x LED
Lumens (theor. / tested)	4805 lm / 3827 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	150 cm
Size (W x H x D)	108 x 108 (124) x 76 mm
Approvals	-

1603-300385

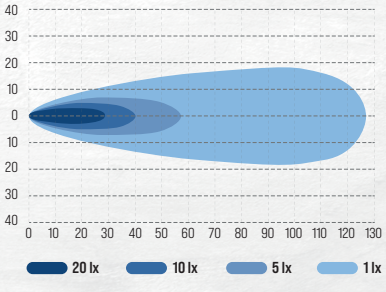

WORK LIGHTS



OPTIBEAM

BORN IN THE DARKNESS



4000-5000 lm

OPTIBEAM

OCTAX 4.0



OPTIBEAM OCTAX 4.0

4600 lm.

Input voltage	9-36 V
Power consumption	3,50 A @ 13,7 V
LED	4 x high power LED
Lumens (theor. / tested)	5000 lm / 4600 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	Integrated DT plug
Size (W x H x D)	115 x 115 (134) x 81 mm
Approvals	R10, CISPR25 class 3

1603-300720



OPTIBEAM

The Optibeam SlimX work light is the most powerful, low-profile light cannon in its size class. The real lumen output reaches a remarkable high 4400 lumens and the Xfrost coating of the lens distributes the light evenly over the entire working area. The lamp has a special coating that is more resistant to corrosion and has an IP68 classification for water tightness. The color temperature of the lamp is optimized to 5300 Kelvin, which guarantees a pleasant experience for the eyes even when working for longer periods of time. The extremely low-profile mounting bracket ensures a remarkably low and unobtrusive installation, and the bracket is applicable for both bottom and top mounting. The lamp is approved for vehicle use as ECE R10 and the interference protection class is CISPR class 3. As a guarantee of quality, Optibeam work lights are granted a three-year warranty.



OPTIBEAM SLIMX

4420 lm.

Input voltage	9-36 V
Power consumption	4,20 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	4800 lm / 4420 lm
Color temperature	5300 K
IP rating	IP68
Cable / connection	30 cm, open cable ends
Size (W x H x D)	157 x 47 x 68 (90) mm
Approvals	R10

1603-300767



OPTIBEAM



OPTIBEAM E-BAR REVERSE

4800 lm.

Input voltage	12-24 V
Power consumption	Work light: 3,64 A @ 13,7 V Reverse light: 0,85 A @ 13,7 V
LED	21 x LED
Lumens (tested)	Work light: 4800 lm Reverse light: 1200 lm
Color temperature	5300 K
IP rating	IP68
Cable / connection	250 cm, 3-pin. open cable ends
Size (W x H x D)	534 x 157 x 25 mm
Approvals	R148, R10

1603-300785



Work light

4000-5000 lm



BULLBOY AGRILINE



BULLBOY AGRILINE

4310 lm, 60 W. I.a. for Valtra A4, N4, T4, S4 -series.

Input voltage	9-32 V
Power consumption	3,61 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	5000 lm / 4310 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	Integrated DT-plug
Size (W x H x D)	106,3 x 106,3 x 84 mm
Approvals	CISPR class 3

1603-300197



BULLBOY AGRILINE



BULLBOY AGRILINE

4337 lm, 60 W. 360° rotating bracket.

Input voltage	9-32 V
Power consumption	3,05 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	4500 lm / 4337 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug
Size (W x H x D)	100 x 130 x 73 mm
Approvals	R10, CISPR25 class 4

1603-300196



BULLBOY AGRILINE



BULLBOY AGRILINE

4530 lm, 60 W. Replaces original lamps in the front corner of cabin in Valtra N- and T-series. Compatible with N1-3 series, T1-3 series, C-series, M-series. Hole mount model for cabin top/front corner. Fits in the original mounting frame.

Input voltage	9-32 V
Power consumption	3,05 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	6000 lm / 4530 lm
Color temperature	5300 K
IP rating	IP68
Cable / connection	20 cm, 2-pin. Delphi W/P
Size (W x H x D)	100 x 117 x 76 mm
Approvals	R10, CISPR25 class 4

1603-300194



BULLBOY AGRILINE



BULLBOY AGRILINE

4825 lm, 80 W. Replaces most of the side-mounted OE work lamps.

Input voltage	9-32 V
Power consumption	3,62 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	6800 lm / 4825 lm
Color temperature	6300 K
IP rating	IP68
Cable / connection	40 cm
Size (W x H x D)	155 x 90 x 94 mm
Approvals	R10

1603-300261

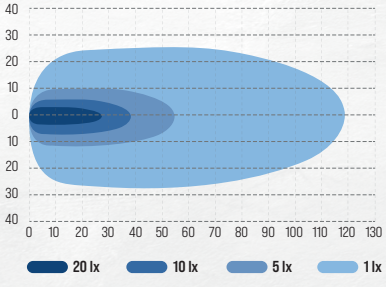



5000+ lm

OPTIBEAM OCTAX

The OctaX® model series combines distinctive design with high-performance work lighting. Advanced reflector technology and efficient LED units deliver reliable illumination for demanding conditions. Built for professional use, the lights feature a built-in DT connector, full EMC protection, RST mounts, and other practical details that make them a versatile choice for various lighting needs. Three different power options are available for work machines and specialized vehicles. Measured light output ranges from 4600 lm (OctaX 4.0) to 7400 lm (OctaX 8.0), with a wide beam pattern in all versions. All models have a color temperature of 5500 K, providing comfortable and effective light across different applications and environments.

OPTIBEAM OCTAX 5.0



OPTIBEAM OCTAX 5.0
5500 lm.

Input voltage	9-36 V
Power consumption	4,75 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	6050 lm / 5500 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	Integrated DT plug
Size (W x H x D)	90 x 90 (107) x 57 (65) mm
Approvals	R10

1603-300730



OPTIBEAM OCTAX 6.0



OPTIBEAM OCTAX 6.0
6100 lm.

Input voltage	9-36 V
Power consumption	5,30 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	6600 lm / 6100 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	Integrated DT plug
Size (W x H x D)	115 x 115 (134) x 81 mm
Approvals	R10, CISPR25 class 3

1603-300721



OPTIBEAM OCTAX 8.0



OPTIBEAM OCTAX 8.0
7400 lm.

Input voltage	9-36 V
Power consumption	6,80 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	8200 lm / 7400 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	Integrated DT plug
Size (W x H x D)	115 x 115 (134) x 81 mm
Approvals	R10, CISPR25 class 3

1603-300722



5000+ lm

NEW ARRIVAL

OPTIBEAM



OPTIBEAM ELITES 4

5000 lm. 60 W. Approved as a reversing light.

Input voltage	9-32 V
Power consumption	3,87 A @ 13,7 V
LED	40 x LED
Lumens (tested)	5000 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Built-in DT
Size (W x H x D)	100 x 100 (148) x 48,2 mm
Approvals	R148, R10, CISPR25 class 4

1603-300827



OPTIBEAM

NEW ARRIVAL



OPTIBEAM ELITES 5

8500 lm. 108 W.

Input voltage	9-32 V
Power consumption	6,73 A @ 13,7 V
LED	72 x LED
Lumens (tested)	8500 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Built-in DT
Size (W x H x D)	125 x 125 (174) x 55,4 mm
Approvals	R10, CISPR25 class 4

1603-300828



OPTIBEAM

NEW ARRIVAL



OPTIBEAM ELITES 5 GLARE FREE

7500 lm. 270 W.

Input voltage	9-32 V
Power consumption	5,40 A @ 13,7 V
LED	9 x LED
Lumens (tested)	7500 lm
Color temperature	5500 K
IP rating	IP68
Cable / connection	Built-in DT
Size (W x H x D)	125 x 125 (174) x 55,4 mm
Approvals	R10, CISPR25 class 4

1603-300829

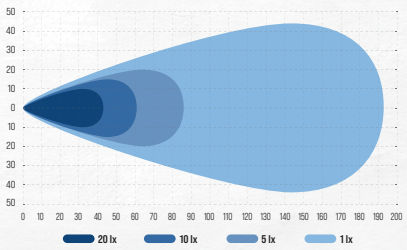



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM ELLIPSE 54

6020 lm, 54 W.

Input voltage	9-32 V DC
Power consumption	3,60 A @ 13,7 V
LED	36 x LED
Lumens (theor. / tested)	8100 lm / 6020 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	109 x 101 x 45 mm
Approvals	R10

1603-300232



BULLBOY PROLINE

The base for the Spectrum work lights is on three key elements. These elements are the ultimate light output on a very compact housing, extremely smooth beam pattern and on top of the line modern desing.

Despite of their small size the Spectrum lights are very strong when it comes to the performance. Perfected wide beam works very well as a reversing light but it is at its best when illuminating active working area.

Modern design without compromises and a metallic special coating combined with the big reflectors and darkish outlook optics gives the Spectrum series lights look that's easy on the eyes but also makes unnoticeable installations possible.

BULLBOY PROLINE SPECTRUM SQUARE 54

6050 lm, 54 W.

Input voltage	9-32 V DC
Power consumption	3,89 A @ 13,7 V
LED	36 x LED
Lumens (theor. / tested)	8100 lm / 6050 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	101 x 101 x 45 mm
Approvals	R10

1603-300233





5000+ lm



BULLBOY PROLINE







BULLBOY PROLINE CENTUM	*CENTUM 6000 K*	*CENTUM 4500 K*
100 W.	**8136 lm.**	**8210 lm.**
Input voltage	9-32 V	9-32 V
Power consumption	6,33 A @ 13,7 V	6,39 A @ 13,7 V
LED	5 x LED	5 x LED
Lumens (theor. / tested)	8900 lm / 8136 lm	8900 lm / 8210 lm
Color temperature	6000 K	4500 K
IP rating	IP68	IP68
Cable / connection	20 cm + 200 cm, DT-plug	20 cm + 200 cm, DT-plug
Size (W x H x D)	113 x 113 x 76,4 mm	113 x 113 x 76,4 mm
Approvals	CISPR25 class 3, R10	CISPR25 class 3, R10
	1603-300457	**1603-300458**

BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SQUARE 96

9240 lm, 96 W.

Input voltage	9-32 V DC
Power consumption	6,03 A @ 13,7 V
LED	64 x LED
Lumens (theor. / tested)	14400 lm / 9240 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	112 x 112 x 55 mm
Approvals	R10
1603-300234	



BULLBOY PROLINE



BULLBOY PROLINE

12000 lm, 150 W.

Input voltage	9-36V
Power consumption	8,3 A @ 13,7 V
LED	30 x LED
Lumens (theor. / tested)	15000 lm / 12000 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	50 cm, DTP-plug
Size (W x H x D)	270 x 190 (215) x 75 mm
Approvals	-
1603-300367	

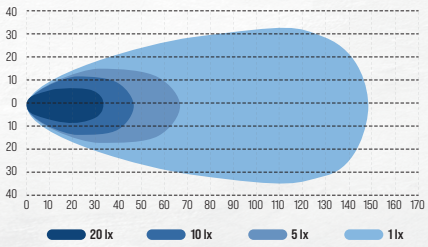

Reversing lights

BULLBOY PROLINE

NEW ARRIVAL



BULLBOY PROLINE MINI

400 lm, 9W+6W. Scene close-up work light, reversing light and warning light, all in one package. Wide light pattern, direct mounting from the rear. Approved as a reversing light.

Input voltage	10-30 V
Power consumption	0,29 A @ 13,7 V
LED	6 x white work light LEDs + 6 x amber warning light LEDs
Lumens (theor. / tested)	630 lm / 400 lm
Color temperature	5300 K
IP rating	IP67/ IP69K
Cable / connection	50 cm, 3-pin. open cable ends
Size (W x H x D)	79 x 49 x 24 mm
Approvals	R148, R10, R65 class 1

1603-300815



BULLBOY PROLINE



BULLBOY PROLINE

580 lm, 5 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-30 V
Power consumption	0,43 A @ 13,7 V
LED	3 x LED
Lumens (theor. / tested)	680 lm / 580 lm
Color temperature	5400 K
IP rating	IP67/ IP69K
Cable / connection	20 cm
Size (W x H x D)	57,6 x 32,6 x 23,8 mm
Approvals	R148, R10

1603-300802



BULLBOY AGRILINE



BULLBOY AGRILINE

989 lm, 18 W. Approved as a reversing light.

Input voltage	9-32 V
Power consumption	0,96 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	1440 lm / 989 lm
Color temperature	6000 K
IP rating	IP67
Cable / connection	15 cm
Size (W x H x D)	150 x 53 x 56 mm
Approvals	R23, R10

1603-300262



BULLBOY PROLINE



BULLBOY PROLINE

1153 lm, 20 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-36 V
Power consumption	0,99 A @ 13,7 V
LED	13 x LED
Lumens (theor. / tested)	1284 lm / 1153 lm
Color temperature	5700 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	114 x 146 x 52 mm
Approvals	R23, R10, ADR

1603-300270



BULLBOY PROLINE



BULLBOY PROLINE

1350 lm, 18 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-30 V
Power consumption	1,00 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	2000 lm / 1350 lm
Color temperature	5400 K
IP rating	IP67 / IP69K
Cable / connection	15 cm, integrated DT-plug downward
Size (W x H x D)	75 x 75 x 39,5 mm
Approvals	R148, R10

1603-300801



Reversing lights

BULLBOY PROLINE



BULLBOY PROLINE

1410 lm, 12 W. Special heat-conducting plastic housing, corrosion free. Approved as a reversing light.

Input voltage	12-30 V
Power consumption	0,95 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	2000 lm / 1410 lm
Color temperature	5400 K
IP rating	IP67 / IP69K
Cable / connection	15 cm, integrated DT-plug sideways
Size (W x H x D)	157,2 x 39,2 x 40,2 mm
Approvals	R148, R10

1603-300803



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SLIM 12

1430 lm, 12 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	0,89 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	2500 lm / 1430 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	45 cm, open cable ends
Size (W x H x D)	157 x 39 x 50 (52) mm
Approvals	R10, R23

1603-300235



BULLBOY PROLINE



BULLBOY PROLINE MINI

NEW ARRIVAL

1970 lm, 30 W. Approved as a reversing light.

Input voltage	10-30 V DC
Power consumption	1,89 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	2800 lm / 1970 lm
Color temperature	6000 K
IP rating	IP68/69
Cable / connection	60 cm, 2-pin. DT
Size (W x H x D)	100 (115,5) x 19 x 42 (53,7) mm
Approvals	R148, R10

1603-300814



OPTIBEAM



OPTIBEAM ELITES 3

NEW ARRIVAL

2700 lm. 36 W. Approved as a reversing light.

Input voltage	9-32 V
Power consumption	2,40 A @ 13,7 V
LED	24 x LED
Lumens (tested)	2700 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Built-in DT
Size (W x H x D)	78 x 78 (85) x 41 mm
Approvals	R148, R10, CISPR 25 Class 4

1603-300826

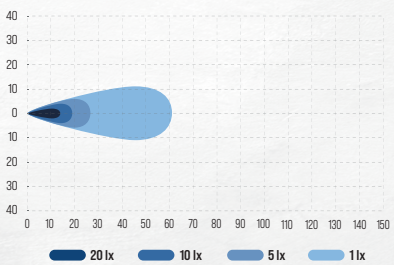

Reversing lights

BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SLIM 18

2150 lm, 18 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	1,64 A @ 13,7 V
LED	6 x LEDm
Lumens (theor. / tested)	2500 lm / 2150 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Open cable ends
Size (W x H x D)	157 x 39 x 50 (52) mm
Approvals	R23, R10

1603-300236



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM ELLIPSE 24

2650 lm, 24 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	1,67 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	3600 lm / 2650 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	75 x 68 x 41 mm
Approvals	R23, R10

1603-300230



BULLBOY PROLINE



BULLBOY PROLINE SPECTRUM SQUARE 24

2750 lm, 24 W. Approved as a reversing light.

Input voltage	9-32 V DC
Power consumption	1,73 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	3600 lm / 2750 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Integrated DT-plug downward
Size (W x H x D)	70 x 70 x 41 mm
Approvals	R23, R10

1603-300231



OPTIBEAM



NEW ARRIVAL

OPTIBEAM ELITES 4

5000 lm. 60 W. Approved as a reversing light.

Input voltage	9-32 V
Power consumption	3,87 A @ 13,7 V
LED	40 x LED
Lumens (tested)	5000 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	Built-in DT
Size (W x H x D)	100 x 100 (148) x 48,2 mm
Approvals	R148, R10, CISPR25 class 4

1603-300827

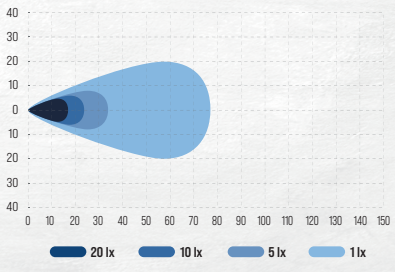

NORDICLIGHTS

NORDIC LIGHTS® produces premium, high-tech work and drivinglights for heavy-duty vehicles in the mining, construction, forestry, material handling and agricultural industries. Productive collaboration with partners in different branches of industry and continuous strategic investments in own R&D department, laboratories, and the latest in simulation software has made them experts in lighting technology.

Nordic Lights is ISO 9001 and ISO 14001 certified and their quality management system covers all key processes. Their lights are top-notch in their respective sectors globally and are created in cooperation with clients that includes industry leaders like Caterpillar, Liebherr, Sandvik and Komatsu.



NORDIC LIGHTS SCORPIUS PRO 415 PH
1500 lm, 28 W. Patented anti-glare phenom-optics.

Input voltage	9-32 V
Power consumption	
Lumens (theor. / tested)	1950 lm / 1500 lm
Color temperature	5000 K
IP rating	IP68, IP6K9K
Cable / connection	Built-in DT (2-pin)
Size (W x H x D)	100 x 100 x 86 mm
Approvals	CISPR 25 Class 5
	1605-989101B





NORDIC LIGHTS CANIS GO 420
1800 lm, 28 W.

Input voltage	12-24 V
Power consumption	
Lumens (theor. / tested)	2800 lm / 1800 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	DT-plug (2-pin)
Size (W x H x D)	93 x 122 x 72 mm, 0,5 kg
Approvals	CISPR25 class 5
	1605-988103B



NORDIC LIGHTS PICTOR 620
1800 lm, 28 W.









Input voltage	12 / 24 V	12 / 24 V	12 / 24 V	12 / 24 V
Power consumption				
Lumens (theor. / tested)	2700 lm / 1800 lm	2700 lm / 1800 lm	2700 lm / 1800 lm	2700 lm / 1800 lm
Color temperature	5000 K	5000 K	5000 K	5000 K
IP rating	IP68, IP6K9K	IP68, IP6K9K	IP68, IP6K9K	IP68, IP6K9K
Cable / connection	Built-in DT (2-pin)	Built-in DT (2-pin)	Built-in DT (2-pin)	Built-in DT (2-pin)
Size (W x H x D)	156 x 48 mm, 0,7 kg	156 x 48 mm, 0,7 kg	156 x 48 mm, 0,7 kg	156 x 48 mm, 0,7 kg
Approvals	CISPR25 class 5	CISPR25 class 5	CISPR25 class 5	CISPR25 class 5
Light pattern	Wide downwards	Wide upwards	Wide upwards	Wide downwards
Mounting	M10 + M16	M10 + M16	2 x M10	2 x M10
	1605-987203B	**1605-987201B**	**1605-987204B**	**1605-987205B**

Nordic Lights







NORDIC LIGHTS SCORPIUS GO 420
1800 lm, 28 W.

Input voltage	12-24 V	12-24 V
Power consumption		
Lumens (theor. / tested)	2800 lm / 1800 lm	2800 lm / 1800 lm
Color temperature	5000 K	5000 K
IP rating	IP68	IP68
Cable / connection	DT-plug (2-pin)	DT-plug (2-pin)
Size (W x H x D)	99 x 95 x 66 mm, 0,6 kg	99 x 95 x 66 mm, 0,6 kg
Approvals	CISPR25 class 5	CISPR25 class 5
Light pattern	Flood	Wide flood
	1605-988203B	**1605-988204B**





NORDIC LIGHTS KL1401
2150 lm, 42 W.

Input voltage	12-24 V
Power consumption	
Lumens (theor. / tested)	3200 lm / 2150 lm
Color temperature	5700 K
IP rating	IP69
Cable / connection	DT-plug (2-pin)
Size (W x H x D)	110 x 137 x 74 mm
Approvals	CISPR25 class 5
	1605-982802B





NORDIC LIGHTS ANTARES GO 625
2300 lm, 39 W.

Input voltage	12-24 V
Power consumption	
Lumens (theor. / tested)	3600 lm / 2300 lm
Color temperature	5000K
IP rating	IP68
Cable / connection	DT-plug (2-pin)
Size (W x H x D)	160 x 95 x 72 mm, 0,8 kg
Approvals	CISPR25 class 5
	1605-988302B



NORDIC LIGHTS CANIS PRO 330
3000 LM, 28 W.







Input voltage	9-32 V	9-32 V	9-32 V
Power consumption			
Lumens (theor. / tested)	4800 lm / 3000 lm	4800 lm / 3000 lm	4800 lm / 3000 lm
Color temperature	5000 K	5000 K	5000 K
IP rating	IP68, IP6K9K	IP68, IP6K9K	IP68, IP6K9K
Cable / connection	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
Size (W x H x D)	84 x 84 (114) x 74 mm	84 x 84 (114) x 74 mm	84 x 84 (114) x 74 mm
Approvals	CISPR25 class 5	CISPR25 class 5	CISPR25 class 5
Light pattern	Flood	Wide flood	High beam
	1605-980403B	**1605-980401B**	**1605-980402B**

Nordic Lights





Scorpius PRO 4500, 4200lm Wide Flood



NORDIC LIGHTS
SCORPIUS PRO 4500
4200 lm, 40 W.

Scorpius PRO 2500, 2300lm Wide Flood



NORDIC LIGHTS
SCORPIUS PRO 2500
2300 lm, 19 W.

Scorpius PRO 3500 S, 3500lm Glare-Free



NORDIC LIGHTS
SCORPIUS PRO 3500 S
3500 lm, 52 W.

Scorpius PRO 4500, 4200lm Flood



NORDIC LIGHTS
SCORPIUS PRO 4500
4200 lm, 40 W.

Input voltage	9-32 V	9-32 V	9-32 V	9-32 V
Power consumption	40 W	19 W	52 W	40 W
Lumens (theor. / tested)	6700 lm / 4200 lm	3700 lm / 2300 lm	4500 lm / 3500 lm	6700 lm / 4200 lm
Color temperature	5700 K	5700 K	5700 K	5700 K
IP rating	IP68, IP6K9K	IP68, IP6K9K	IP68, IP6K9K	IP68, IP6K9K
Cable / connection	Built-in DT-plug (2-pin)	Built-in DT-plug (2-pin)	Built-in DT-plug (2-pin)	Built-in DT-plug (2-pin)
Size (W x H x D)	108 x 108 x 84 mm	108 x 108 x 84 mm	108 x 108 x 84 mm	108 x 108 x 84 mm
Approvals	CISPR25 class 5	CISPR25 class 5	CISPR25 class 5	CISPR25 class 5
Light pattern	Wide flood	Wide flood	Glare free	Flood
	1605-9849020	**1605-9849014**	**1605-9849026**	**1605-9849021**

Work light bars

NEW ARRIVALS

OPTIBEAM

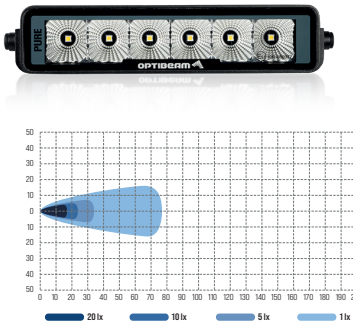

OPTIBEAM PURE WORK BAR 185

5000 lm, 70 W.

Input voltage	9-36 V
Power consumption	5,32 A @ 13,7 V
LED	6 x LED
Lumens (tested)	5000 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	100 cm, open cable ends
Size (W x H x D)	200 x 41,6 x 64,5 mm
Approvals	R10

1603-300780

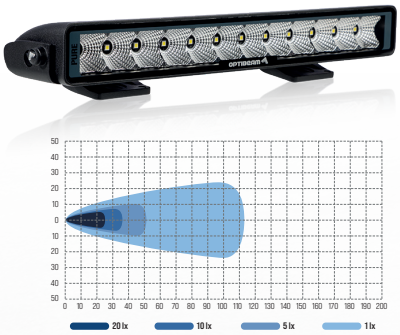

OPTIBEAM PURE WORK BAR 335

10850 lm, 140 W.

Input voltage	9-36 V
Power consumption	10,7 A @ 13,7 V
LED	12 x LED
Lumens (tested)	10850 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	100 cm, open cable ends
Size (W x H x D)	335 x 41,6 x 64,5 mm
Approvals	R10

1603-300781

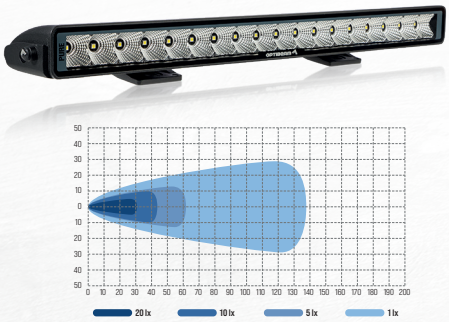

OPTIBEAM PURE WORK BAR 506

16340 lm, 215 W.

Input voltage	9-36 V
Power consumption	16,33 A @ 13,7 V
LED	18 x LED
Lumens (tested)	16340 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	100 cm, open cable ends
Size (W x H x D)	507,2 x 42 x 64,5 mm
Approvals	R10

1603-300782

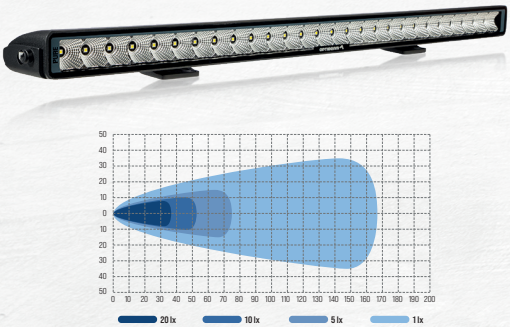

OPTIBEAM PURE WORK BAR 730

23680 lm, 275 W.

Input voltage	9-36 V
Power consumption	23,76 A @ 13,7 V
LED	27 x LED
Lumens (tested)	23680 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	100 cm, open cable ends
Size (W x H x D)	737,7 x 42 x 65 mm
Approvals	R10

1603-300783

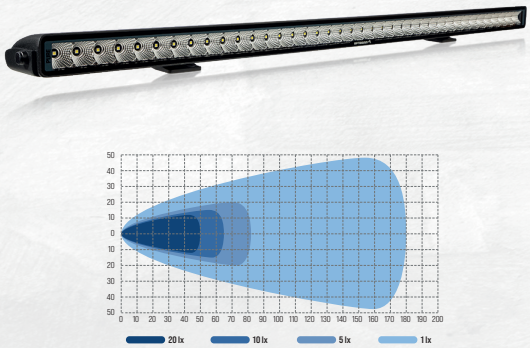

OPTIBEAM PURE WORK BAR 1025

35000 lm, 350 W.

Input voltage	9-36 V
Power consumption	28,32 A @ 13,7 V
LED	39 x LED
Lumens (theor. / tested)	35000 lm
Color temperature	5000 K
IP rating	IP68
Cable / connection	100 cm, open cable ends
Size (W x H x D)	1049,5 x 43,7 x 65,8 mm
Approvals	R10

1603-300784

Work light bars

BULLBOY PROLINE

Compact and powerful Bullboy Reactor work light series

This new work light series brings better light output, a modern beam pattern, and top-tier efficiency in a compact size. The single-row and double-row models in various lengths fit a wide range of installation needs without space constraints. All lights are R10-approved for vehicle use and offer excellent illumination at a reasonable price.

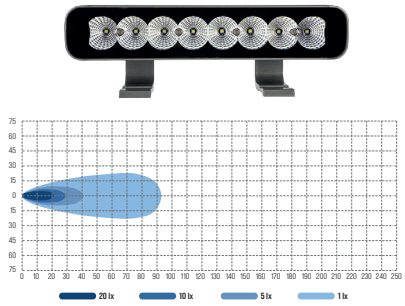

BULLBOY PROLINE SINGLE 255
5500 lm, 96 W.

Input voltage	10-30 V
Power consumption	4,92 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	6600 lm / 5500 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	255 x 50,5 (74,1) x 50 mm
Approvals	R10

1603-300789

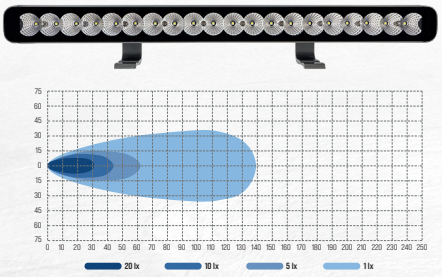

BULLBOY PROLINE SINGLE 578
12600 lm, 240 W.

Input voltage	10-30 V
Power consumption	11,06 A @ 13,7 V
LED	20 x LED
Lumens (theor. / tested)	17000 lm / 12600 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	578 x 50,5 (74,1) x 50 mm
Approvals	R10

1603-300790

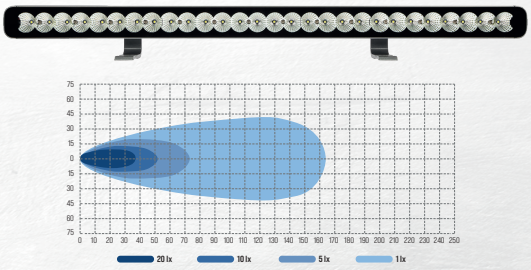

BULLBOY PROLINE SINGLE 793
17500 lm, 336 W.

Input voltage	10-30 V
Power consumption	15,67 A @ 13,7 V
LED	28 x LED
Lumens (theor. / tested)	22000 lm / 17500 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	793 x 50,5 (74,1) x 50 mm
Approvals	R10

1603-300791

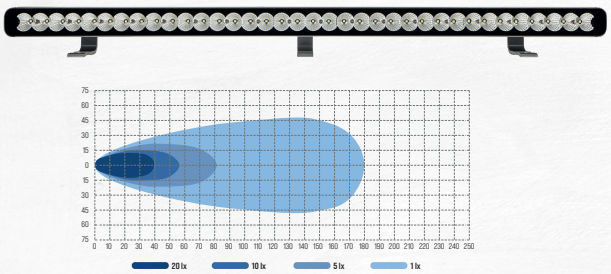

BULLBOY PROLINE SINGLE 1010
23900 lm, 432 W.

Input voltage	10-30 V
Power consumption	21 A @ 13,7 V
LED	36 x LED
Lumens (theor. / tested)	30000 lm / 23900 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	1010 x 50,5 (74,1) x 50 mm
Approvals	R10

1603-300792

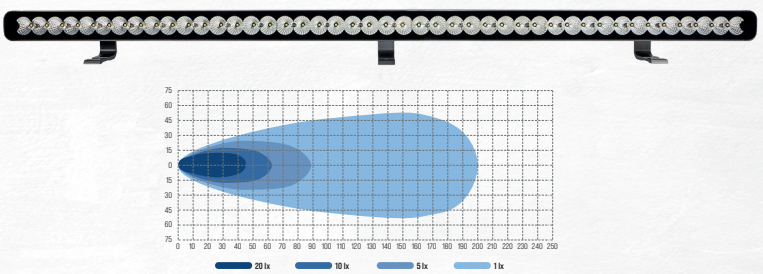

BULLBOY PROLINE SINGLE 1230
33600 lm, 528 W.

Input voltage	10-30 V
Power consumption	26 A @ 13,7 V
LED	44 x LED
Lumens (theor. / tested)	42000 lm / 33600 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	1225 x 50,5 (74,1) x 50 mm
Approvals	R10

1603-300793

BULLBOY PROLINE

Work light bars



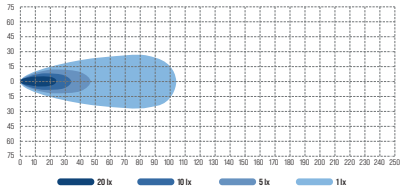

BULLBOY PROLINE DOUBLE 289

7720 lm, 144 W.

Input voltage	10-30 V
Power consumption	5,92 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	9500 lm / 7720 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	289 x 75,5 (97,8) x 50,5 mm
Approvals	R10

1603-300794



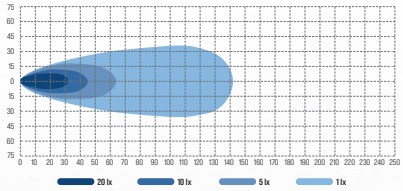

BULLBOY PROLINE DOUBLE 532

14500 lm, 288 W.

Input voltage	10-30 V
Power consumption	10,95 A @ 13,7 V
LED	32 x LED
Lumens (theor. / tested)	18000 lm / 14500 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	532 x 75,5 (97,8) x 50,5 mm
Approvals	R10

1603-300795



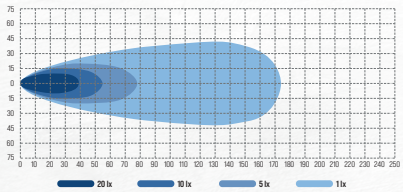

BULLBOY PROLINE DOUBLE 774

22500 lm, 432 W.

Input voltage	10-30 V
Power consumption	17,16 A @ 13,7 V
LED	48 x LED
Lumens (theor. / tested)	28000 lm / 22500 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	774 x 75,5 (97,8) x 50,5 mm
Approvals	R10

1603-300796



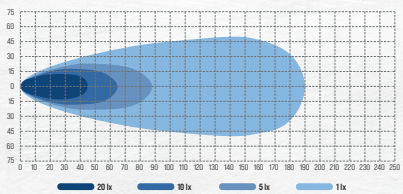

BULLBOY PROLINE DOUBLE 1017

28200 lm, 576 W.

Input voltage	10-30 V
Power consumption	23 A @ 13,7 V
LED	64 x LED
Lumens (theor. / tested)	35000 lm / 28200 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	1017 x 75,5 (97,8) x 50,5 mm
Approvals	R10

1603-300797



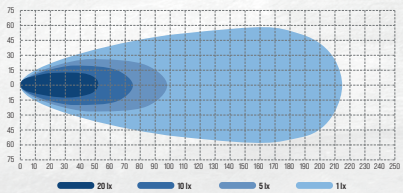

BULLBOY PROLINE DOUBLE 1260

35800 lm, 720 W.

Input voltage	10-30 V
Power consumption	28 A @ 13,7 V
LED	80 x LED
Lumens (theor. / tested)	44000 lm / 35800 lm
Color temperature	5600 K
IP rating	IP67, IP69K
Cable / connection	120 cm, open cable ends
Size (W x H x D)	1260 x 75,5 (97,8) x 50,5 mm
Approvals	R10

1603-300798



OPTIBEAM

BORN IN THE DARKNESS

SEARCH LIGHTS

BULLBOY PROLINE



BULLBOY PROLINE

50 W. Wireless remote controlled search light.

Input voltage	12/24 V
Power consumption	2,66 A @ 13,7 V
LED	10 x LED
Lumens (theor. / tested)	350,000 cd / 2436 lm
Color temperature	5700 K
IP rating	Light head IP68, housing IP56
Cable / connection	10 cm
Size (W x H x D)	182 x 190 x 164 mm
Approvals	R10, EN60945

1604-12013

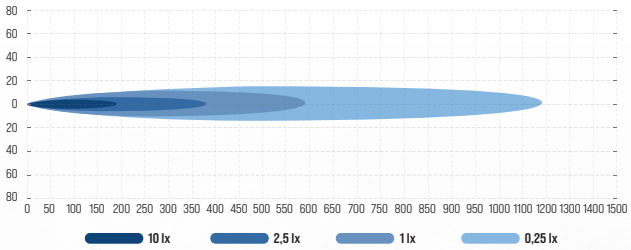

BULLBOY OCEANLINE



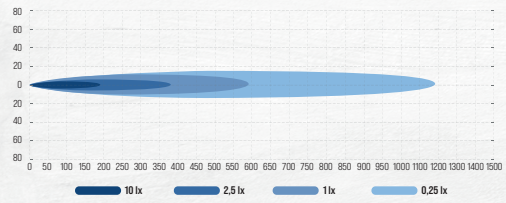

BULLBOY OCEANLINE

50 W. Wireless remote controlled search light.

Input voltage	12/24 V
Power consumption	2,66 A @ 13,7 V
LED	10 x LED
Lumens (theor. / tested)	350,000 cd / 2436 lm
Color temperature	5700 K
IP rating	Light head IP68, housing IP56
Cable / connection	10 cm
Size (W x H x D)	182 x 190 x 193 mm
Approvals	R10, EN60945

1604-12014

BULLBOY OCEANLINE



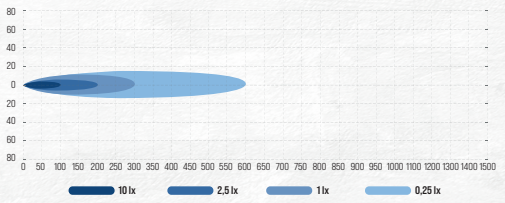

BULLBOY OCEANLINE

30 W. Wireless remote controlled search light.

Input voltage	12 V
Power consumption	2,0 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	74,000 cd
Color temperature	5700 K
IP rating	Light head IP68, housing IP56
Cable / connection	10 cm
Size (W x H x D)	192 x 160 x 140 mm
Approvals	R10

1604-12019

Search lights

BULLBOY OCEANLINE











BULLBOY OCEANLINE
Special coating. Wide light pattern.

	40 W.	60 W.	80 W.	120 W.
Input voltage	12-48 V	12-48 V	12-48 V	12-48 V
Power consumption	1,67 @ 13,7 V	2,48 A @ 13,7 V	3,20 A @ 13,7 V	3,70 A @ 13,7 V
LED	4 x LED	6 x LED	4 x LED	6 x LED
Lumens (theor. / tested)	3000 lm / 2554 lm	5000 lm / 3337 lm	5500 lm / 4163 lm	7000 lm / 4890 lm
Color temperature	4000 K	4000 K	4000 K	4000 K
IP rating	IP68	IP68	IP68	IP68
Cable / connection	Integrated DT-plug	Integrated DT-plug	Integrated DT-plug	Integrated DT-plug
Size (W x H x D)	Ø 90 x 106,2 x 75 mm	126 x 78 (101,3) x 70 mm	103 (106,7) x 103 (126,5) x 70 mm	135 (138,7) x 103 (126,5) x 70 mm
Approvals	CISPR25 class 5, ADR	CISPR25 class 5, ADR	CISPR25 class 5, ADR	CISPR25 class 5, ADR
	1603-300281	**1603-300282**	**1603-300283**	**1603-300284**

BULLBOY OCEANLINE



BULLBOY OCEANLINE
120 W.

Input voltage	10-30 V
Power consumption	6,74 A @ 13,7 V
LED	24 x LED
Lumens (theor. / tested)	14400 lm / 7591 lm
Color temperature	6000 K
IP rating	IP67, IP69K
Cable / connection	100 cm, DT-plug
Size (W x H x D)	357 x 78,5 (89,3) x 59,5 mm
Approvals	R10

1603-300464

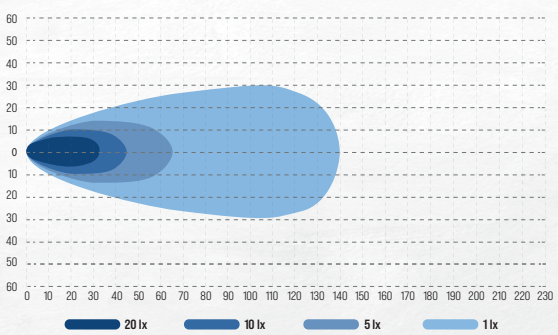

HEAD LIGHTS



Automatic heating melts the snow and prevents freezing!

OPTIBEAM

The Optibeam Aura features a modern design that blends seamlessly with the vehicle while enhancing its overall appearance. Thanks to its versatile functionality, the Aura combines high beam, low beam, position light, and warning light functions in a single unit. This makes it an ideal choice for all driving and weather conditions, improving both visibility and safety.

One of the Aura's standout features is its heated lens system, which prevents the build-up of frost and ice on the lens. This ensures reliable performance in cold and demanding weather conditions, allowing you to stay focused on the road without worrying about the effectiveness of your lighting.

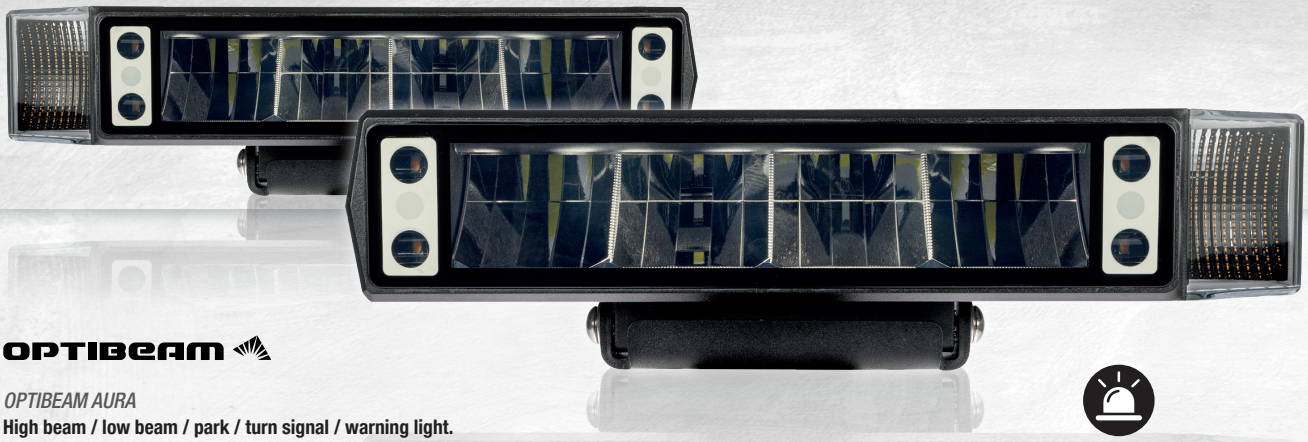

OPTIBEAM

OPTIBEAM AURA

High beam / low beam / park / turn signal / warning light.

Automatic heating in lens.

Input voltage	6-30 V
Power consumption	Low: 2,0/1,0 A @ 12/24 V. High: 3,9/1,9 A @ 12/24 V
LED	LED
Lumens (theor. / effective)	Low: 1800 lm / 1170 lm. High: 3600 lm / 2340 lm
Color temperature	5000 K
IP rating	IP68/69K
Cable / connection	50 cm, 6-pin. DT-connector
Size (W x H x D)	325 x 65 x 72 mm
Approvals	R148, R149, R10, R65, ISO13207 compliant

1605-5013 (right)
1605-5014 (left)

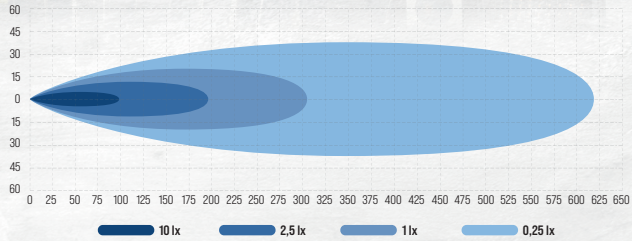

Head lights





Automatic heating melts the snow and prevents freezing!

BULLBOY PROLINE

BULLBOY PROLINE

38 W (high beam) / 20 W (low beam) / 1,5 W (park) / 18 W (turn signal).
Automatic heating in lens.

Input voltage	9-36 V
Power consumption	Low: 3,25 A @ 13,7 V. High: 5,05 A @ 13,7 V
LED	LED
Lumens (theor. / tested)	Low: 1800 lm / 1211 lm. High: 3600 lm / 2424 lm
Color temperature	5500K
IP rating	IP68
Cable / connection	6-pin. Deutsch-connection
Size (W x H x D)	340 x 75 x 85,3 mm
Approvals	R149, ref. 12,5, R10, R6, R7, ISO13207 compliant

1605-5004 (right)
1605-5005 (left)

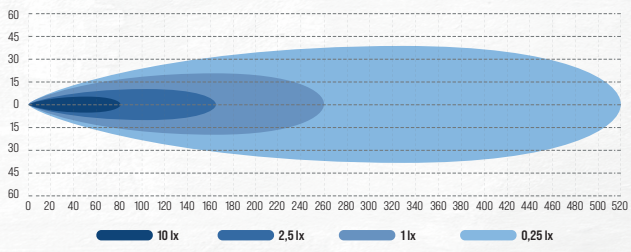

Head lights





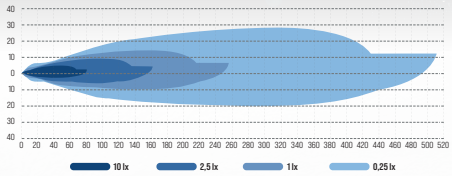

BULLBOY AGRILINE

High beam + low beam.

Input voltage	10-30 V DC
Power consumption	Low: 2 A @ 12 V. High: 2,58 A @ 12 V
LED	LED
Lumens (theor. / tested)	Low: 2000 lm / 800 lm. High: 5600 lm / 2400 lm
Color temperature	5000 K
IP rating	IP66, IP6K9K
Cable / connection	Open cable ends
Size (W x H x D)	Ø 85 (118) x 109,5 mm
Approvals	R149, R10, ref. 17,5, CISPR25 class 5

1605-5015



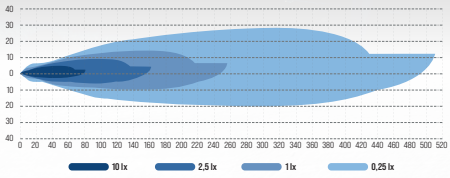

BULLBOY AGRILINE

High beam + low beam + DI + position + DRL.

Input voltage	10-30 V DC
Power consumption	Low: 2 A @ 12 V. High: 2,58 A @ 12 V
LED	LED
Lumens (theor. / tested)	Low: 2000 lm / 800 lm. High: 5600 lm / 2400 lm
Color temperature	5000 K
IP rating	IP66, IP6K9K
Cable / connection	Open cable ends
Size (W x H x D)	Ø 85 (118) x 109,5 mm
Approvals	R149, R10, ref. 17,5, CISPR25 class 5

1605-5016



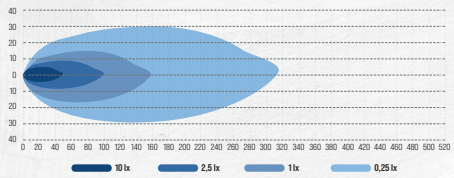

BULLBOY AGRILINE

1 x 30 W / 3 x 5 W.

Input voltage	9-32 V
Power consumption	Low: 1,521 A @ 13,7 V. High: 3,89 A @ 13,7 V
Lumens (theor. / tested)	Low: 700 lm / 562 lm. High: 5600 lm / 2690 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	H4
Size (W x H x D)	157 x 93,5 x 80 mm
Approvals	R148, R149, R10, ref. 17,5, CISPR25 class 4

1605-5008HP



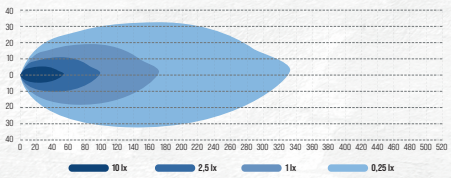

BULLBOY AGRILINE

1 x 30 W / 6 x 10 W.

Input voltage	9-32 V
Power consumption	Low: 1,48 A @ 13,7 V. High: 4,53 A @ 13,7 V
Lumens (theor. / tested)	Low: 700 lm / 571 lm. High: 6400 lm / 3529 lm
Color temperature	6000 K
IP rating	IP68
Cable / connection	H4
Size (W x H x D)	165 x 105 x 80 mm
Approvals	R148, R149, R10, ref. 17,5, CISPR25 class 4

1605-5009HP

Head lights



BULLBOY AGRILINE

24 W / 48 W. Low beam / high beam / position light / turn signal.

Automatic heating in lens.

Input voltage	9-30 V
Power consumption	Low: 3,55 A @ 13,7 V. High: 5,66 A @ 13,7 V
Lumens (theor. / tested)	Low: 1800 lm / 1100 lm. High: 3600 lm / 2450 lm
Color temperature	5700K
IP rating	IP68, IP69K
Cable / connection	50 cm, 6-pin. DT
Size (W x H x D)	150 (215) x 150 (176) x 85 mm
Approvals	R149, ref. 17,5, R10, R6, R7

1605-5012

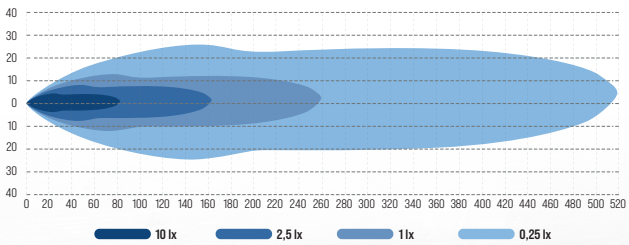



BULLBOY AGRILINE

15 W / 15 W. Low beam / high beam.

Replaces round head lights.

Input voltage	10-30 V
Power consumption	Low: 1,22 A @ 13,7 V. High: 1,80 A @ 13,7 V
Lumens (theor. / tested)	Low: 800 lm / 663 lm. High: 1000 lm / 757 lm
Color temperature	5700 K
IP rating	IP6K9K
Cable / connection	100 cm
Size (W x H x D)	151 x 172 x 126 mm
Approvals	R149, ref. 12,5, R10

1605-5000LED

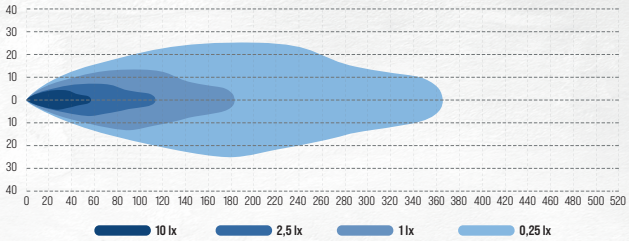



15 W / 15 W. Low beam / high beam / position light.

Input voltage	10-30 V
Power consumption	Low: 1,12 A @ 13,7 V. High: 1,14 A @ 13,7 V
Lumens (theor. / tested)	Low: 700 lm / 572 lm. High: 1000 lm / 787 lm
Color temperature	5700 K
IP rating	IP66, IP6K9K
Cable / connection	15 cm
Size (W x H x D)	Ø 144,4 x 88 mm
Approvals	R149, ref. 12,5, R87, R10, R7

1605-5010

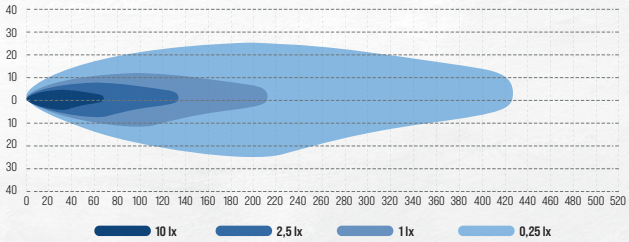

AUXILIARY LIGHTS

Round

Fog lights

OPTIBEAM



OPTIBEAM FOG RIDER FOG LIGHT

Dark look.

Input voltage	12-24 V
Power consumption	0,78 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	1000 lm / 645 lm
Color temperature	4000 K
Distance	1 lux @ 90 m
Cable / connection	50 cm
Size (W x H x D)	Ø 90 x 103 mm
Approvals	R19

1605-NS406

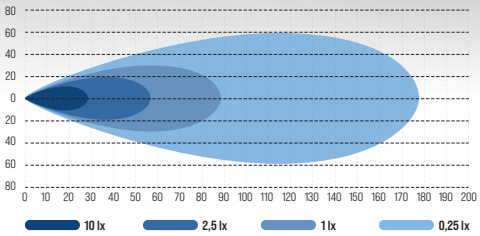

5”

OPTIBEAM SAVAGE



5”

OPTIBEAM SAVAGE 5”

White parking light, chrome frame included.

Input voltage	9-36 V
Power consumption	1,80 A @ 13,7 V
LED	2 x LED
Lumens (theor. / tested)	2000 lm / 1580 lm
Color temperature	5000 K
Distance	1 lux @ 308 m
Cable / connection	220 cm, 3-pin. DT-plug
Size (W x H x D)	Ø 127 x 78 mm
Approvals	R149, ref. 30, R10, R7

1605-NS2073

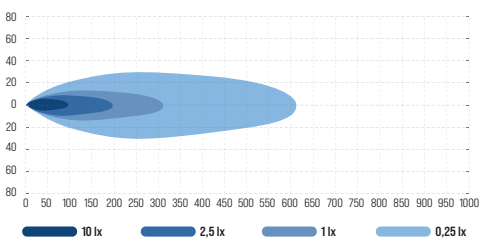

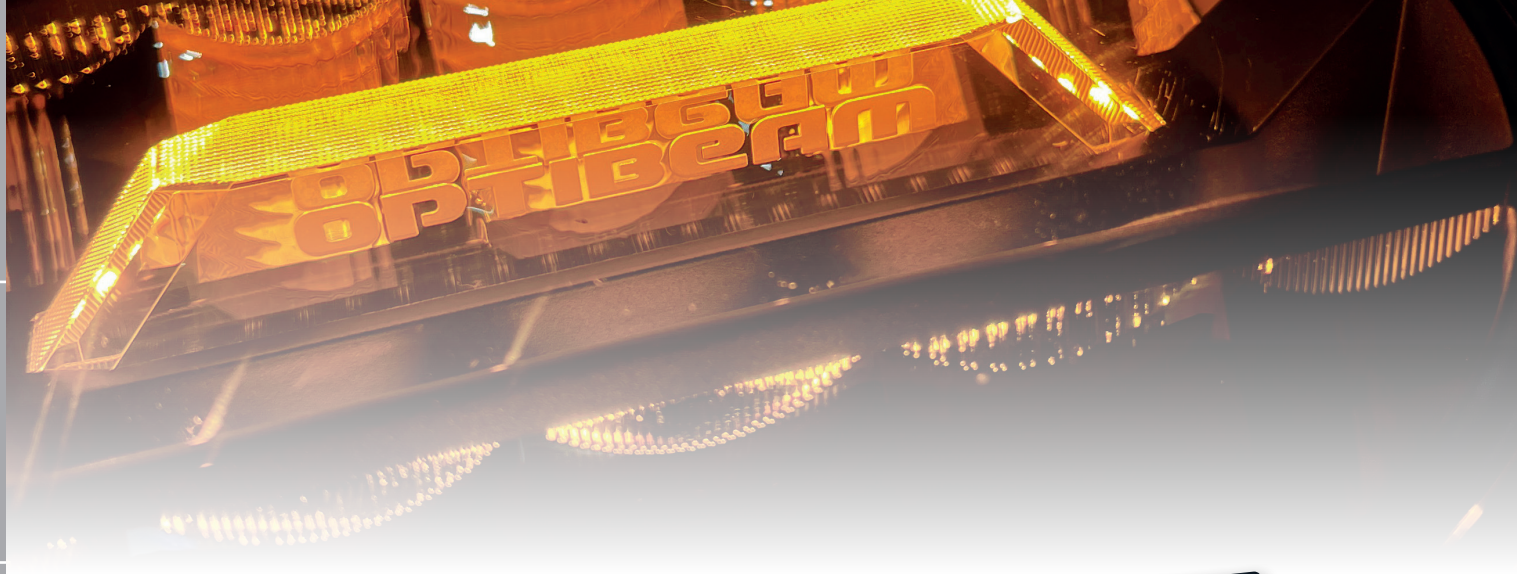

OPTIBEAM

7”

OPTIBEAM ELITES 7

Double up. Amber / white parking light. Back side buttons to change park light color and between full and ref. power. Dark optics.



NEW ARRIVAL

Input voltage	9-36 V
Power consumption	8,96 A @ 13,7 V
Lumens (tested)	7780 lm
Color temperature	5000 K
Distance	1 lux @ 672 m, R149: 1 lux @ 332 m
Cable / connection	220 cm, 4-pin. DT-plug
Size (W x H x D)	Ø 178 x 75 mm
Approvals	R148/149, ref. 20, R10

1605-NS2117

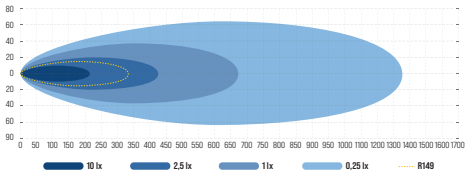

OPTIBEAM SE7EN

7”

OPTIBEAM SE7EN

Double up. Amber / white parking light (both with their own cable). U- and pedestal bracket.



Input voltage	9-32 V
Power consumption	8,09 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	10400 lm / 8400 lm
Color temperature	5500 K
Distance	1 lux @ 500 m
Cable / connection	85 cm, 4-pin. DT-plug
Size (W x H x D)	Ø 178 x 83 mm
Approvals	R148/149, ref. 30, R10

1605-NS2087

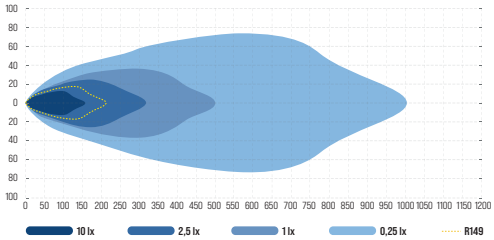

W-Light

7”

W-LIGHT FURY 7

Double up. Amber / white parking light. Amber warning light.



Input voltage	12-48 V DC
Power consumption	7,52 A @ 13,7 V
LED	10 x LED
Lumens (theor. / tested)	6700 lm / 6130 lm
Color temperature	5700 K
Distance	1 lux @ 454 m, R149: 1 lux @ 290 m
Cable / connection	220 cm cable with 6-pin. DT-plug
Size (W x H x D)	177,8 x 167,8 (185) x 89,6 mm
Approvals	R148, R149, ref. 20, R10, R65

1605-NS3874

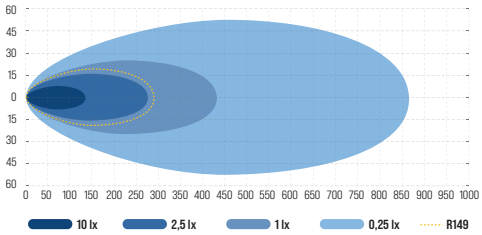

OPTIBEAM



9”

OPTIBEAM ELITES 9 HEATED

Double up. Amber / white parking light. Back side buttons to change park light color and between full and ref. power. Heated lens, dark optics.

NEW ARRIVAL

Input voltage	9-36 V
Power consumption	14,87 A @ 13,7 V
Lumens (tested)	9540 lm
Color temperature	5000 K
Distance	1 lux @ 780 m, R149: 1 lux @ 3681 m
Cable / connection	220 cm, 2-pin. DTP-plug
Size (W x H x D)	Ø 218 x 87,5 mm
Approvals	R148/149, ref. 20, R10

1605-NS2118

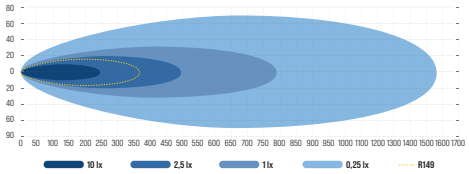

OPTIBEAM



9”

OPTIBEAM ELITES 9

Double up. Amber / white parking light. Back side buttons to change park light color and between full and ref. power. Dark optics.

Input voltage	9-36 V
Power consumption	12,33 A @ 13,7 V
Lumens (tested)	11320 lm
Color temperature	5000 K
Distance	1 lux @ 816 m, R149: 1 lux @ 401 m
Cable / connection	220 cm, 2-pin. DTP-plug
Size (W x H x D)	Ø 218 x 233 x 87,5 mm
Approvals	R148/149, ref. 20, R10

1605-NS2108

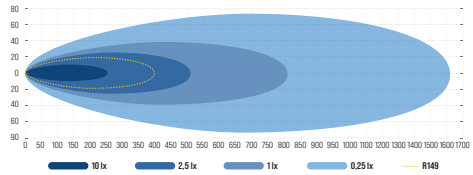

OPTIBEAM



OPTIBEAM ELITES MEGA

Double up. Amber / white parking light. Back side buttons to change park light color and between full and ref. power.

Input voltage	9-36 V
Power consumption	8,69 A @ 13,7 V
Lumens (tested)	7780 lm
Color temperature	5000 K
Distance	1 lux @ 559 m, R149: 1 lux @ 329 m
Cable / connection	220 cm, 2-pin. DTP-plug
Size (W x H x D)	248 x 139 (155) x 80,5 mm
Approvals	R148/149, ref. 20, R10

1605-NS2109

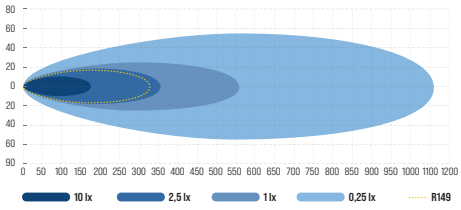

OPTIBEAM

NIN9



9”

OPTIBEAM NIN9

Double up. Amber / white parking light (both with their own cable). U- and pedestal bracket.

Input voltage	9-36 V
Power consumption	11.16 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	14000 lm / 11400 lm
Color temperature	5500 K
Distance	1 lux @ 580 m, R149: 1 lux @ 245 m
Cable / connection	85 cm, 4-pin. DT-plug
Size (W x H x D)	Ø 220 x 83 mm
Approvals	R148/149, ref. 30, R10

1605-NS2088

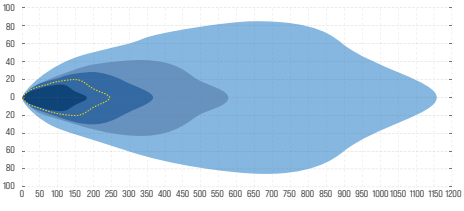



W-Light



9”

W-LIGHT NEPTUNE GEN 2

Amber / white parking light.

Input voltage	9-30 V
Power consumption	5,33 A @ 13,7 V
Lumens (theor. / tested)	8750 lm / 7600 lm
Color temperature	5700 K
Distance	1 lux @ 421 m
Cable / connection	Integrated DT-plug + 1 m cable
Size (W x H x D)	227 x 227 (244) x 80 mm
Approvals	R149, ref. 25, R10

1605-NS3869

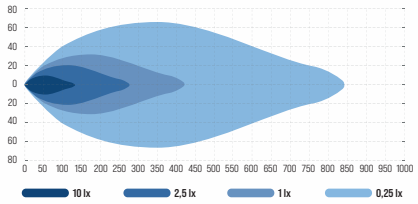

W-Light



9”

W-LIGHT PHOENIX ECE EDITION

Integrated parking light function, amber.

Input voltage	9-36 V
Power consumption	10,96 A @ 13,7 V
Lumens (theor. / tested)	18000 lm / 14085 lm
Color temperature	5400 K
Distance	1 lux @ 1056 m, R149: 1 lux @ 185 m
Cable / connection	50 cm, 4-pin. DT-plug
Size (W x H x D)	227 x 80 mm
Approvals	R149, ref. 12,5, R10

1605-NS3882

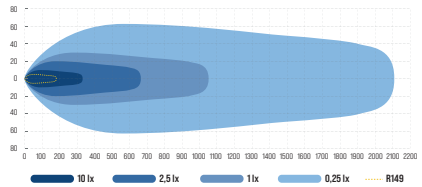

W-Light

W-LIGHT FURY NOW ALSO IN WHITE EDITION!

Fury 9” is a furious addition to the range of round, powerful auxiliary lights. The futuristically designed, dark-toned lamp with two parking light color options offers a light output that is undeniably a wedge for the top fight. Superbly designed optics offer optimal light distribution on the road and a light performance of 1 lux up to 750 meters. As the icing on the cake, the new lamp has an integrated warning light neatly hidden in the upper part of the lens. The frameless design of the lens withstands shocks and bumps and doesn’t collect dirt or snow. The mounting bracket is carefully designed so that the installation of adjacent lamps goes smoothly. W-Light Fury is a lamp that attracts attention with its appearance, features and performance.

W-Light



9”

W-LIGHT FURY 9”

Warning light, double up. Amber / white parking light. Amber warning light.

Input voltage	12-48 V
Power consumption	11,86 A @ 13,7 V
LED	16 x LED
Lumens (theor. / tested)	9000 lm / 8170 lm
Color temperature	5500 K
Distance	1 lux @ 747 m, R149: 1 lux @ 266 m
Cable / connection	220 cm, 6-pin. DT-plug
Size (W x H x D)	Ø 225 x 85 mm
Approvals	R148, R149, ref. 17,5, R10, R65 class 1

1605-NS3871
1605-NS3871W

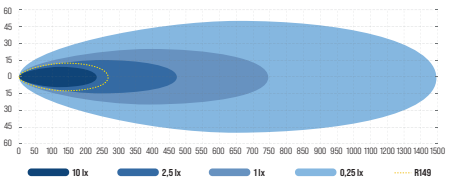

AUXILIARY LIGHTS

Light bars



E-bars

OPTIBEAM

Optibeam E-Bar – sleek, powerful, and built for real-world use.

Designed and engineered specifically for Finnish EU license plates (442 x 118 mm), this minimalist light bar features an integrated relay system for fast, hassle-free installation — no extra wiring or hardware needed. Just plug and play, with true Optibeam performance.

OPTIBEAM E-BAR FIN SINGLE
544 (442) mm.



Input voltage	9-36 V
Power consumption	6,40 A @ 13,7 V
LED	18 x LED
Lumens (tested)	7500 lm
Color temperature	5000 K
Distance	1 lux @ 493 m
Cable / connection	250 cm, 3-pin. DT-plug
Size (W x H x D)	544 (442) x 163 x 36 mm
Approvals	R149, ref. 40, R10

1605-NS2112

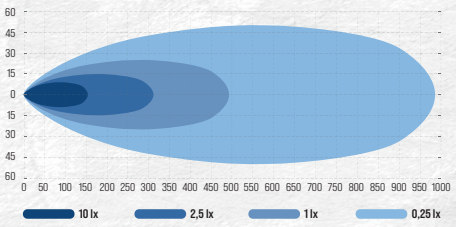

OPTIBEAM

OPTIBEAM E-BAR EU TWIN
537 mm.



Input voltage	9-36 V
Power consumption	8,93 A @ 13,7 V
LED	18 x LED
Lumens (tested)	9200 lm
Color temperature	5000 K
Distance	1 lux @ 450 m
Cable / connection	250 cm, 3-pin. DT-plug
Size (W x H x D)	537 x 156 x 36 mm
Approvals	R149, ref. 20+20, R10

1605-NS2113

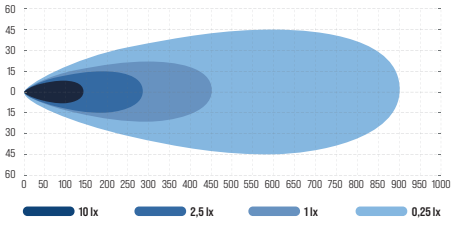

100-400 mm



OPTIBEAM

OPTIBEAM PURE 185

183 mm. Double up. Amber / white parking light.



Input voltage	9-48 V
Power consumption	6,75 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	8900 lm / 8050 lm
Color temperature	5000 K
Distance	1 lux @ 327 m, R149: 1 lux @ 153 m
Cable / connection	220 cm, 2-pin. DTP plug
Size (W x H x D)	183 x 42 x 65 mm
Approvals	R149, R148, ref. 12,5, R10

1605-NS2104

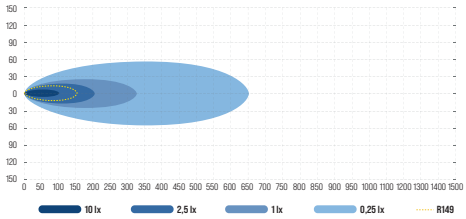

NEW ARRIVAL

OPTIBEAM

Optibeam Elites Rally X has been developed specifically for competitive motorsport, where lighting demands exceed anything road-legal solutions can deliver. Elites Rally X is designed to be installed as a four-light system, using the vertically reversible beam pattern of each light during installation and operation. Optimized for motorsport where every gram matters. Reduced mass minimizes mounting load and simplifies installation.

OPTIBEAM ELITES RALLY X

301 mm. Intelligent power management. Light can be used both ways, depending on the weather conditions.



Input voltage	10-16 V
Power consumption	7,00 A @ 13,7 V
LED	5 x LED
Lumens (tested)	6490 lm
Color temperature	5000 K
Distance	1 lux @ 539 m, R149: 1 lux @ 295 m
Cable / connection	100 cm, 3-pin. DT-plug
Size (W x H x D)	301 x 50 x 61 mm
Approvals	R149, ref. 20, R10

1605-NS2119

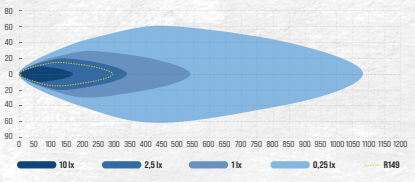



OPTIBEAM

SAVAGE

OPTIBEAM SAVAGE 12”

307 mm. Double up. Amber / white parking light.



Input voltage	9-36 V
Power consumption	3,72 A @ 13,7 V
LED	4 x LED
Lumens (theor. / tested)	4000 lm / 2760 lm
Color temperature	5700 K
Distance	1 lux @ 440 m, R149: 1 lux @ 225 m
Cable / connection	220 cm, 4-pin. DTP-plug
Size (W x H x D)	307 x 81 (109) x 87 mm
Approvals	R149, ref. 12,5, R10

1605-NS2080

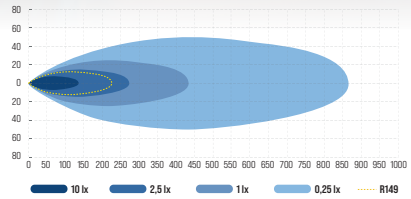

OPTIBEAM

OPTIBEAM PURE 335

335 mm. Double up. Amber / white parking light.



Input voltage	9-48 V
Power consumption	14,95 A @ 13,7 V
LED	12 x LED
Lumens (theor. / tested)	13400 lm / 12190 lm
Color temperature	5000 K
Distance	1 lux @ 450 m, R149: 1 lux @ 213 m
Cable / connection	220 cm, 2-pin. DTP plug
Size (W x H x D)	335 x 42 x 65 mm
Approvals	R149, R148, ref. 25, R10

1605-NS2105

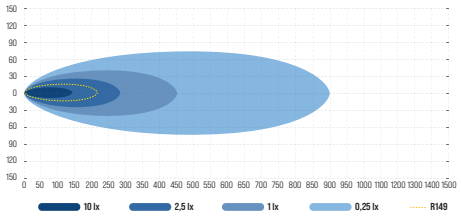

W-Light

W-LIGHT SURGE SUPER SLIM 8,5

214 mm. Double up. Amber / white parking light.



Input voltage	9-36 V
Power consumption	4,08 A @ 13,7 V
LED	6 x LED
Lumens (theor. / tested)	5800 lm / 4300 lm
Color temperature	5000 K
Distance	1 lux @ 361 m, R149: 1 lux @ 235 m
Cable / connection	220 cm 5-pin. cable, 4-pin. DT-plug
Size (W x H x D)	214 x 33 (47) x 59 mm
Approvals	R149, R148 (park), ref. 12,5, R10

1605-NS3876

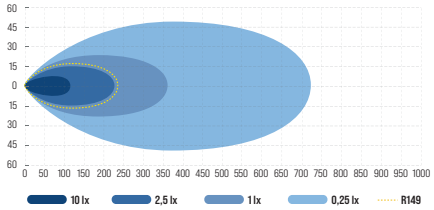

W-Light

W-LIGHT IMPULSE 1.2

286 mm.



Input voltage	11-32 V
Power consumption	3,05 A @ 13,7 V
LED	10 x LED
Lumens (theor. / tested)	4500 lm / 3900 lm
Color temperature	5700 K
Distance	1 lux @ 296 m
Cable / connection	220 cm, 2-pin. DT 2 -plug
Size (W x H x D)	286 (294) x 36 x 58 mm
Approvals	R149, ref. 17,5, R10

1605-NS3865

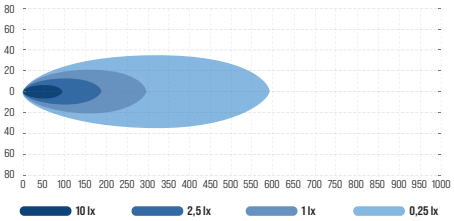



NEW ARRIVAL

OPTIBEAM
PURE 506 INTELLIGENT+

The Optibeam Pure 506 Intelligent+ takes auxiliary driving light technology to the next level. Its Intelligent+ system, among the first of its kind in the industry, automatically adapts the beam pattern during oncoming traffic encounters, illuminating the road edges and surrounding areas without dazzling other road users. Building on the popular Pure 506's powerful light output, precisely engineered beam pattern, and robust construction, this innovative safety feature delivers enhanced visibility exactly when it's needed most.

OPTIBEAM PURE 506 INTELLIGENT+
508 mm. Double up. Amber / white parking light. Intelligent+ dimming function. Left side instant OFF, right side slow dimming.



Input voltage	9-48 V
Power consumption	22,32 A @ 13,7 V
LED	18 x LED
Lumens (tested)	16230 lm
Color temperature	5500 K
Distance	1 lux @ 493 m, R149: 1 lux @ 293 m
Cable / connection	220 cm, 2-pin. DTP-plug
Size (W x H x D)	508 x 42 x 65 mm
Approvals	R149, R148, ref. 25, R10

1605-NS2120

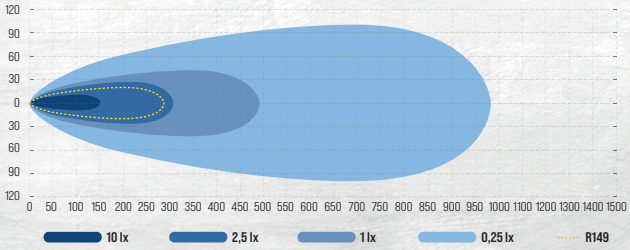

OPTIBEAM

OPTIBEAM PURE 506
508 mm. Double up. Amber / white parking light.





Input voltage	9-48 V
Power consumption	21,00 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	19400 lm / 17620 lm
Color temperature	5000 K
Distance	1 lux @ 562 m R149: 1 lux @ 260 m
Cable / connection	220 cm, 2-pin. DTP-plug
Size (W x H x D)	508 x 42 x 65 mm
Approvals	R149, R148, ref. 30, R10

1605-NS2097

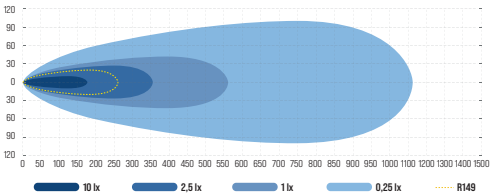

OPTIBEAM
SUPER CAPTAIN DUAL

OPTIBEAM SUPER CAPTAIN DUAL 600 CURVED
525 mm. Double up.





Input voltage	9-36 V
Power consumption	22,77 A @ 13,7 V
Lumens (theor. / tested)	32000 lm / 21000 lm
Color temperature	5000 K
Distance	1 lux @ 787 m R149: 1 lux @ 359 m
Cable / connection	220 cm, open cable ends
Size (W x H x D)	525 x 68,5 x 80 mm
Approvals	R148, R149, ref. 30, R10

1605-NS2101

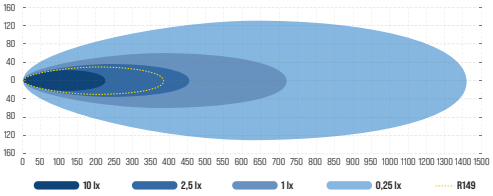



OPTIBEAM SUPER CAPTAIN DUAL

OPTIBEAM SUPER CAPTAIN DUAL 600
525 mm. Double up.



Input voltage	9-36 V
Power consumption	15,79 A @ 13,7 V
LED	24 x LED
Lumens (theor. / tested)	25000 lm / 19896 lm
Color temperature	5000 K
Distance	1 lux @ 604 m R149: 1 lux @ 431 m
Cable / connection	220 cm 2-pin. DTP-plug
Size (W x H x D)	525 x 68 x 80 mm
Approvals	R149, R10

1605-NS2085 (ref. 50)

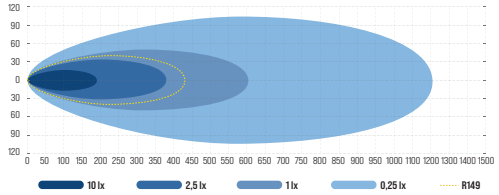

OPTIBEAM SUPER CAPTAIN DUAL RAGE 600

OPTIBEAM SUPER CAPTAIN DUAL RAGE 600
525 mm. Amber / white parking light.



Input voltage	9-36 V
Power consumption	33,00 A @ 12 V
LED	24 x LED
Lumens (theor. / tested)	54000 lm / 27000 lm
Color temperature	6000 K
Distance	1 lux @ 1300 m
Cable / connection	220 cm, open cable ends
Size (W x H x D)	525 x 68 x 80 mm
Approvals	-

1605-NS2089

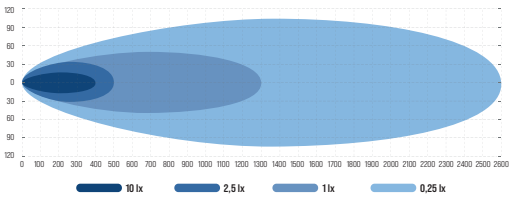

OPTIBEAM

OPTIBEAM SUPER CAPTAIN ONE 600 CURVED
532 mm. Amber / white parking light.





Input voltage	9-36 V
Power consumption	13,28 A @ 13,7 V
Lumens (theor. / tested)	14000 lm / 10400 lm
Color temperature	5000 K
Distance	1 lux @ 592 m, R149: 1 lux @ 334 m
Cable / connection	220 cm, 2-pin. DTP plug
Size (W x H x D)	532 x 47 (59) x 65 mm
Approvals	R149, R148, R10

1605-NS2100

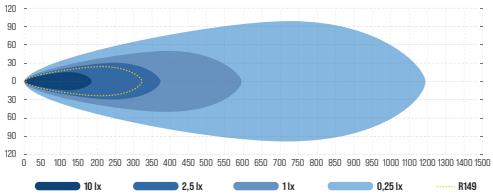

500-600 mm



OPTIBEAM

OPTIBEAM SUPER CAPTAIN ONE 600
534 mm. Amber / white parking light.



Input voltage	9-36 V
Power consumption	11,51 A @ 13,7 V
LED	12 x LED
Lumens (theor. / tested)	14700 lm / 13350 lm
Color temperature	5000 K
Distance	1 lux @ 635 m, R149: 1 lux @ 420 m
Cable / connection	220 cm, 2-pin. DTP plug
Size (W x H x D)	534 x 47 (59) x 65 (75) mm
Approvals	R149, R148, R10

1605-NS2096 (ref. 30)

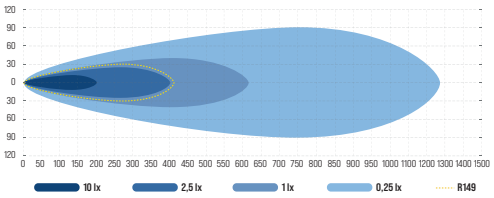

OPTIBEAM

OPTIBEAM GENESIS II HYBRID
548 mm. Hybrid light pattern.



Input voltage	9-36 V
Power consumption	7,86 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	9500 lm / 7400 lm
Color temperature	4500 K
Distance	1 lux @ 599 m, R112: 1 lux @ 430 m
Cable / connection	220 cm, 4-pin. DTP-plug
Size (W x H x D)	548 x 72 x 92 mm
Approvals	R112, ref. 50, R10

1605-NS3741

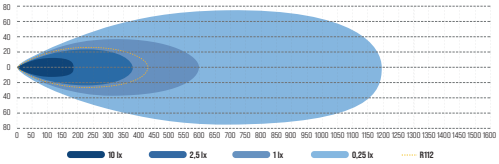

OPTIBEAM

OPTIBEAM GENESIS II HEATED HYBRID
548 mm. Hybrid light pattern, heated lens.



Input voltage	9-36 V
Power consumption	11,43 A @ 13,7 V
LED	8 x LED
Lumens (theor. / tested)	9500 lm / 7400 lm
Color temperature	4500 K
Distance	1 lux @ 556 m, R149: 1 lux @ 423 m
Cable / connection	220 cm, 4-pin. DTP-plug
Size (W x H x D)	548 x 72 x 92 mm
Approvals	R149, ref. 40, R10

1605-NS3741H

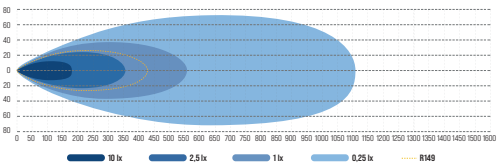



NEW ARRIVAL

W-Light

W-LIGHT FLUX

536 mm.



Input voltage	11-32 V
Power consumption	5,56 A @ 13,7 V
LED	20 x LED
Lumens (theor. / tested)	10000 lm / 5700 lm
Color temperature	6000 K
Distance	1 lux @ 478 m
Cable / connection	2-pin. DT-plug, 30 cm + 10 cm
Size (W x H x D)	536 x 34 (50) x 68 mm
Approvals	R112, ref. 50, R10

1605-NS3883

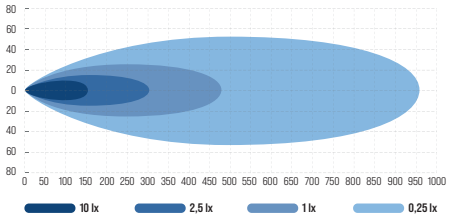

NEW ARRIVAL

W-Light

W-LIGHT VORTEX

555 mm. White parking light.



Input voltage	11-32 V
Power consumption	5,76 A @ 13,7 V
LED	20 x LED
Lumens (theor. / tested)	12000 lm / 7200 lm
Color temperature	5500 K
Distance	1 lux @ 339 m
Cable / connection	3-pin. DT-plug, 40 cm + 10 cm
Size (W x H x D)	555 x 54 x 58 mm
Approvals	R148, R149, ref. 25, R10

1605-NS3884

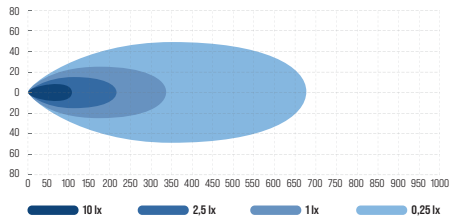



W-Light

W-LIGHT IMPULSE 2.1
532 mm.



Input voltage	11-32 V
Power consumption	5,98 A @ 13,7 V
LED	20 x LED
Lumens (theor. / tested)	12000 lm / 7600 lm
Color temperature	5700 K
Distance	1 lux @ 401 m
Cable / connection	220 cm, 2-pin. DT 2 -plug
Size (W x H x D)	536 (544) x 36 x 58 mm
Approvals	R149, ref. 50, R10

1605-NS3866

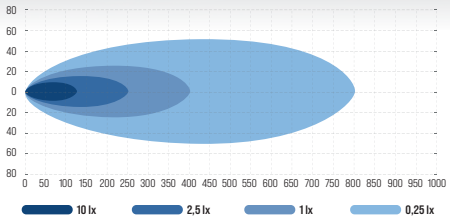

W-Light

W-LIGHT WAVE II FRAMELESS
532 mm. Amber / white parking light.





Input voltage	12-48 V
Power consumption	6,06 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	7600 lm / 6400 lm
Color temperature	5000 K
Distance	1 lux @ 483 m
Cable / connection	220 cm, 4-pin. DT-plug
Size (W x H x D)	532 x 45 x 68 mm
Approvals	R149, R148 (park), ref. 50, R10

1605-NS3847

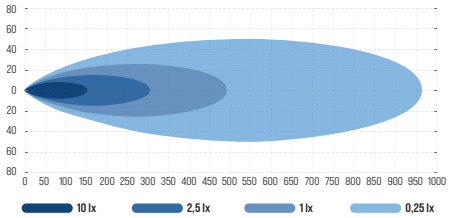

W-Light

W-LIGHT SURGE SUPER SLIM 20
538 mm. Double up.





Input voltage	9-36 V
Power consumption	8,60 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	9200 lm / 8000 lm
Color temperature	5000 K
Distance	1 lux @ 508 m, R149 1 lux @ 373 m
Cable / connection	220 cm 5-pin. cable, 4-pin. DT-plug
Size (W x H x D)	538 x 33 (47) x 59 mm
Approvals	R149, ref. 30, R10

1605-NS3880

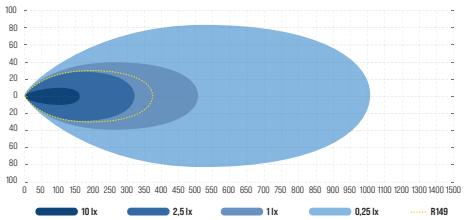



W-Light

W-Light Surge Super Slim is a high-performance auxiliary light series that combines powerful illumination with sleek, low-profile design. Available in four lengths: 8.5”, 20”, 30”, and 40” and it offers a perfect fit for passenger cars, SUVs, and commercial vehicles.

With a height of just 33 mm and a curved aerodynamic shape, the Surge Super Slim integrates seamlessly into your vehicle’s grille or roofline. The wide, far-reaching beam ensures optimal visibility in all driving conditions, while the Double-up function lets you adjust brightness as needed

Amber and white position lights create a refined glow across the entire lens, adding a premium finish to any installation. Designed to enhance both style and safety, Surge Super Slim lights are where performance meets elegance.



W-LIGHT SURGE SUPER SLIM 20

538 mm. Double up. Amber / white parking light.

Input voltage	9-36 V
Power consumption	8,97 A @ 13,7 V
LED	18 x LED
Lumens (theor. / tested)	9200 lm / 8300 lm
Color temperature	5000 K
Distance	1 lux @ 508 m, R149 1 lux @ 373 m
Cable / connection	220 cm 5-pin. cable, 4-pin. DT-plug
Size (W x H x D)	538 x 33 (47) x 59 mm
Approvals	R149, R148 (park), ref. 30, R10

1605-NS3877

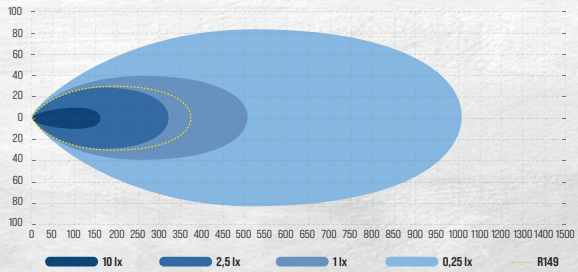

W-Light

W-LIGHT COMBER II FRAMELESS

543 mm. Amber / white parking light.



Input voltage	12-48 V
Power consumption	7,71 A @ 13,7 V
LED	15 x LED
Lumens (theor. / tested)	13800 lm / 9200 lm
Color temperature	5000 K
Distance	1 lux @ 503 m
Cable / connection	220 cm, 4-pin. DT-plug
Size (W x H x D)	543 x 56 x 72 mm
Approvals	R149, R148 (park), ref. 45, R10

1605-NS3848

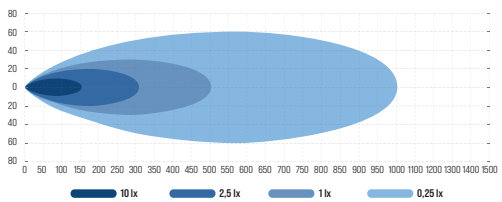

600-900 mm



OPTIBEAM

OPTIBEAM PURE 730
729 mm. Double up. Amber / white parking light.

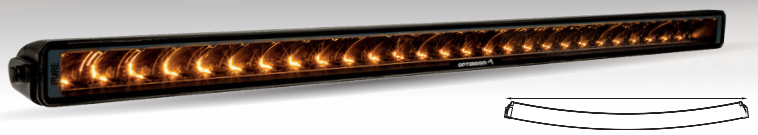

Input voltage	9-48 V
Power consumption	26,88 A @ 13,7 V
LED	27 x LED
Lumens (theor. / tested)	28200 lm / 25670 lm
Color temperature	5000 K
Distance	1 lux @ 674 m, R149: 1 lux @ 332 m
Cable / connection	220 cm, 2-pin. DTP plug
Size (W x H x D)	729 x 42 x 65 mm
Approvals	R148, R149, ref. 30, R10

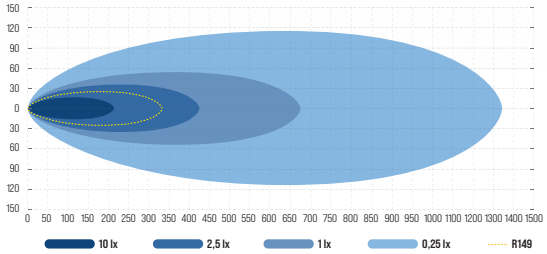

1605-NS2106

OPTIBEAM

OPTIBEAM SUPER CAPTAIN DUAL 800 CURVED
768 mm. Double up. Amber / white parking light.



Input voltage	9-36 V
Power consumption	30,22 A @ 13,7 V
Lumens (theor. / tested)	48000 lm / 32000 lm
Color temperature	5000 K
Distance	1 lux @ 775 m, R149: 1 lux @ 359 m
Cable / connection	220 cm, open cable ends
Size (W x H x D)	768 x 68,5 x 80 mm
Approvals	R148, R149, ref. 30, R10

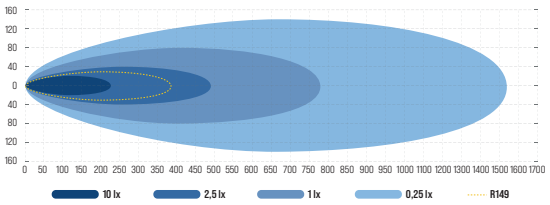

1605-NS2102

OPTIBEAM

SUPER CAPTAIN DUAL 800

SUPER CAPTAIN DUAL 800
800 mm. Double up. Amber / white parking light.



Input voltage	9-36 V
Power consumption	22,45 A @ 13,7 V
LED	36 x LED
Lumens (theor. / tested)	36000 lm / 30400 lm
Color temperature	5000 K
Distance	1 lux @ 700 m, R112 1 lux @ 493 m
Cable / connection	220 cm 2-pin. DTP-plug
Size (W x H x D)	769 x 68,5 x 79,5 mm
Approvals	R112, R10

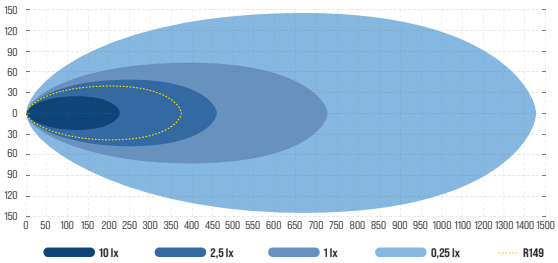

1605-NS2086 (ref. 40)

OPTIBEAM

SUPER CAPTAIN DUAL 800 *Rally Edition*

Lightweight, durable, and brutally powerful auxiliary light designed for high-speed rally use. Its hybrid construction combines aluminum and special plastic into a lightweight yet rigid structure that withstands vibration and impact. The optimized beam pattern delivers wide visibility and long range—exactly where every second counts. Tested by professional drivers, built for the racetrack.



SUPER CAPTAIN DUAL 800 RALLY EDITION
800 mm. Double up.

Input voltage	9-36 V
Power consumption	21,70 A @ 13,7 V
LED	54 x LED
Lumens (theor. / tested)	30000 lm / 21300 lm
Color temperature	5800 K
Distance	1 lux @ 946 m, R149 1 lux @ 491 m
Cable / connection	100 cm, 2-pin. DTP-plug
Size (W x H x D)	771 x 69 x 66 mm
Approvals	R149, ref. 20+20, R10

1605-NS2116

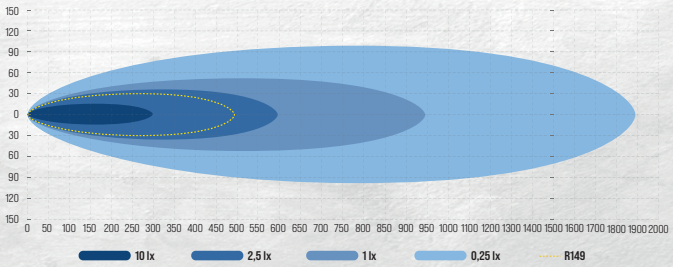

W-Light



W-LIGHT SURGE SUPER SLIM 30
781 mm. Double up. Amber / white parking light.

Input voltage	9-36 V
Power consumption	12,80 A @ 13,7 V
LED	27 x LED
Lumens (theor. / tested)	14600 lm / 12250 lm
Color temperature	5000 K
Distance	1 lux @ 551 m, R149: 1 lux @ 389 m
Cable / connection	220 cm 5-pin. cable, 2-pin. DTP -plug
Size (W x H x D)	781 x 33 (47) x 59 mm
Approvals	R149, R148 (park), ref. 30, R10

1605-NS3878

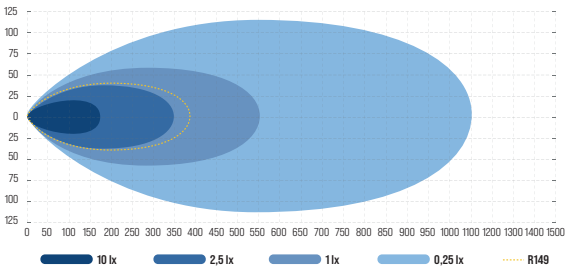

W-Light



W-LIGHT IMPULSE 4 30”
787 mm.

Input voltage	11-32 V
Power consumption	9,73 A @ 13,7 V
LED	30 x LED
Lumens (theor. / tested)	13500 lm / 11140 lm
Color temperature	5700 K
Distance	1 lux @ 463 m
Cable / connection	220 cm, 2-pin. DT 2 -plug
Size (W x H x D)	787 (795) x 36 x 58 mm
Approvals	R149, ref. 50, R10

1605-NS3867

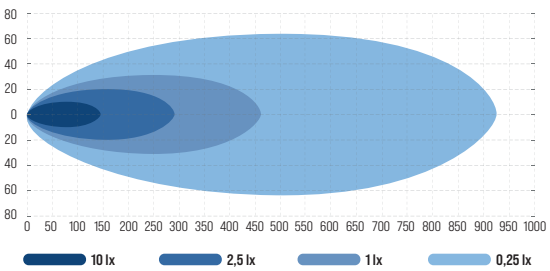

1000+ mm

OPTIBEAM

Unmatched power and performance! The Super Captain Dual 1000 curved is engineered to deliver unbeatable lighting performance in its class. Its sleek and compact design houses a powerful LED system that generates an impressive 42 000 true lumens! Thanks to its precision-engineered reflector, you'll get an optimized light pattern that illuminates the road, road markers, and everything in your path, ensuring a safer and more enjoyable driving experience in even the harshest conditions.

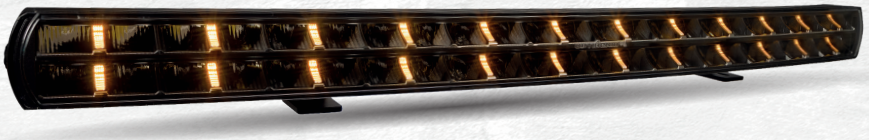

OPTIBEAM SUPER CAPTAIN DUAL 1000 CURVED
1010 mm. Double up. Amber / white parking light.



Input voltage	9-36 V
Power consumption	39,42 A @ 13,7 V
Lumens (theor. / tested)	64800 lm / 42000 lm
Color temperature	5000 K
Distance	1 lux @ 858 m, R149: 1 lux @ 422 m
Cable / connection	220 cm, open cable ends
Size (W x H x D)	1010 x 68,5 x 80 mm
Approvals	R149, R148, ref. 40, R10

1605-NS2103

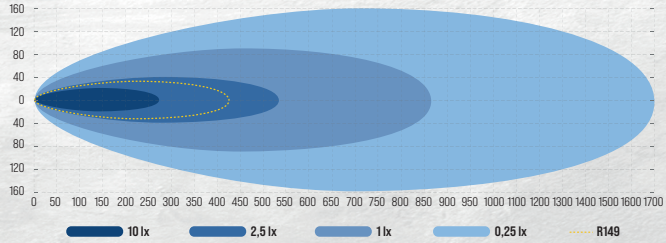

OPTIBEAM



OPTIBEAM PURE 1025
1027 mm. Double up. Amber / white parking light.

Input voltage	9-48 V
Power consumption	28,40 A @ 13,7 V
LED	39 x LED
Lumens (theor. / tested)	31300 lm / 28430 lm
Color temperature	5000 K
Distance	1 lux @ 727 m, R149: 1 lux @ 353 m
Cable / connection	220 cm, 2-pin. DTP plug
Size (W x H x D)	1027 x 43 x 65 mm
Approvals	R149, R148, ref. 30, R10

1605-NS2107

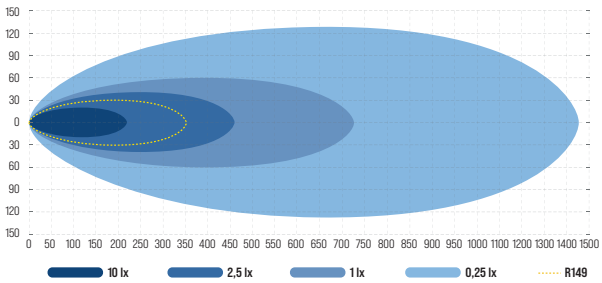

W-Light



W-LIGHT SURGE SUPER SLIM 40
1024 mm. Double up. Amber / white parking light.



Input voltage	9-36 V
Power consumption	19,16 A @ 13,7 V
LED	36 x LED
Lumens (theor. / tested)	19400 lm / 15830 lm
Color temperature	5000 K
Distance	1 lux @ 554 m, R149: 1 lux @ 362 m
Cable / connection	220 cm 5-pin. cable, 2-pin. DTP-plug
Size (W x H x D)	1024 x 33 (47) x 59 mm
Approvals	R149, R148 (park), ref. 30, R10

1605-NS3879

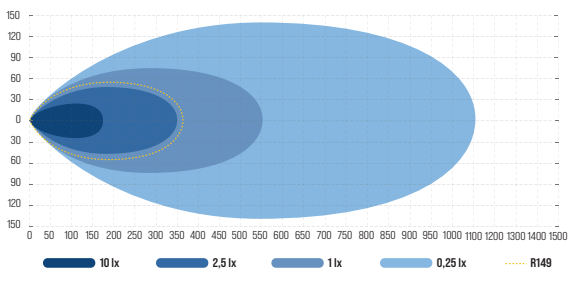

WARNING AND MARKER LIGHTS



OPTIBEAM

Optibeam Dark Phantom SX6 brings a familiar product to the market with a completely new design and updated technology. Meticulously engineered precision optics combined with next-generation components offer enhanced appearance, reliability, and outstanding visibility. The products comply with all modern standards and regulations, both in terms of approvals and material choices.



OPTIBEAM DARK PHANTOM SX6
Mounting screw spacing 102 mm.

Input voltage	12-24 V
Power consumption	0,6 A @ 12 V / 0,3 A @ 24 V (varies with flash pattern)
LED	24 x LED
Color	Amber / blue / red / white
IP rating	IP67, IP69K
Cable	25 cm
Size (W x H x D)	112,6 x 28 x 9,7 mm
Approvals	R65 class 2, R10

1603-300776 (amber, tinted lens)
1603-300777 (blue, clear lens)
1603-300778 (red, clear lens)
1603-300779 (white, clear lens)

OPTIBEAM



OPTIBEAM DARK PHANTOM
LED warning light. 8 flash patterns, hole spacing 58 mm, shock resistant, ADR cable.

UUTUUS!

Color	Amber
Input voltage	10-36 V
Wattage	9,71 W
LED	3 x LED
IP rating	IP67
Cable	50 cm, 3-pin. open cable ends
Size (W x H x D)	78,5 x 26,5 x 14 mm
Approvals	R10, R65 Class 1(XA1)

1608-3223

OPTIBEAM



OPTIBEAM DARK PHANTOM LM6
29 different flash patterns.

Input voltage	12-24 V
Power consumption	0,6 A @ 12 V / 0,3 A @ 24 V (varies with flash pattern)
LED	6 x LED
Color	Amber
IP rating	IPX7
Cable	25 cm
Size (W x H x D)	113 x 28 x 9 mm
Approvals	R65 class 2, R10

1603-300705

OPTIBEAM



OPTIBEAM VECTOR SIX
Military grade warning lighthead, also for airport use. 20 flash patterns.

Input voltage	12 V
Power consumption	1,40 A @ 12 V
LED	6 x LED
Color	Amber
IP rating	IP67
Cable	25 cm
Size (W x H x D)	129 x 28,5 x 11,7 mm
Approvals	CISPR25 class 5, R65, R10, MIL-STD-461G, ICA0

1603-300761

OPTIBEAM



OPTIBEAM FLEX LM6
Flexible mini lighthead for curved or flat surfaces in three colours.

Input voltage	12-24 V
Power consumption	1,20 A @ 12 V / 0,64 A @ 24 V
LED	6 x LED
Color	Amber / blue / red
IP rating	IP67
Cable	30 cm
Size (W x H x D)	126,8 x 30,2 x 10,7 mm
Approvals	CISPR25 class 2, R65 class 2, R10

1603-300758 (amber)
1603-300759 (blue)
1603-300760 (red)

Warning lights



OPTIBEAM

LED WARNING LIGHTBARS - DARK PHANTOM

The most competitive ECE R65 CLASS 2 approved beacon panel series on the market. The new innovative design reduces air resistance and reduces noise nuisance. Carefully polished reflector optics guarantee visibility even in bright daylight. Several different flashing programs, e.g. steady on function with separate control and traffic control function. Includes a separate control panel and mounting kit.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
400 mm. 8 different flash patterns. Brackets, cigarette lighter plug, magnet holders.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
600 mm. 11 different flash patterns. Brackets, magnet holders, control panel.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
800 mm. 11 different flash patterns. Brackets, magnet holders, control panel.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
1000 mm. 11 different flash patterns. Brackets, control panel.

Input voltage	12-24 V	12-24 V	12-24 V	12-24 V
Power consumption	3,76 A @ 12 V / 1,84 A @ 24 V	6,40 A @ 12 V / 3,20 A @ 24 V	7,60 A @ 12 V / 3,80 A @ 24 V	9,00 A @ 12 V / 4,40 A @ 24 V
LED	36 x LED	60 x LED	72 x LED	84 x LED
Reverse voltage protection	36 V	36 V	36 V	36 V
Overload voltage	30 V	30 V	30 V	30 V
IP rating	IP67	IP67	IP67	IP67
Cable	350 cm	350 cm	350 cm	350 cm
Size (W x H x D)	400 x 59 (105) x 300 mm	600 x 59 (105) x 300 mm	800 x 59 (105) x 300 mm	1000 x 59 (105) x 300 mm
Approvals	R65 class 2, R10	R65 class 2, R10	R65 class 2, R10	R65 class 2, R10
	1603-140931	**1603-140932**	**1603-140933**	**1603-140934**



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
1200 mm. 11 different flash patterns. Brackets, control panel.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
1400 mm. 11 different flash patterns. Brackets, control panel.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
1615 mm. 11 different flash patterns. Brackets, control panel.



OPTIBEAM DARK PHANTOM LED WARNING LIGHT BAR
1816 mm. 11 different flash patterns. Brackets, control panel.

Input voltage	12-24 V	12-24 V	12-24 V	12-24 V
Power consumption	10,02 A @ 12 V / 5,20 A @ 24 V	11,40 A @ 12 V / 5,80 A @ 24 V	14,26 A @ 12 V / 7,82 A @ 24 V	16,10 A @ 12 V / 8,28 A @ 24 V
LED	96 x LED	96 x LED	120 x LED	132 x LED
Reverse voltage protection	36 V	36 V	36 V	36 V
Overload voltage	30 V	30 V	30 V	30 V
IP rating	IP67	IP67	IP67	IP67
Cable	350 cm	350 cm	350 cm	350 cm
Size (W x H x D)	1200 x 59 (105) x 300 mm	1400 x 59 (105) x 300 mm	1615 x 59 (105) x 300 mm	1816 x 59 (105) x 300 mm
Approvals	R65 class 2, R10	R65 class 2, R10	R65 class 2, R10	R65 class 2, R10
	1603-140935	**1603-140936**	**1603-140937**	**1603-140938**



Tail lights

NEW ARRIVAL

OPTIBEAM

The new Optibeam Dark Phantom rear lamp brings a clean, modern solution to vehicle rear lighting. This stylish round recessed rear lamp combines all essential rear lighting functions into a single unit.

Its round design makes the lamp highly versatile and easy to integrate into a wide range of vehicles. The classic circular form suits trailers, commercial vehicles, and heavy machinery alike, while enabling a clean, professional-looking installation. Designed to replace a large proportion of the round rear lamps currently available on the market, the Dark Phantom offers a practical and straightforward upgrade.

The Dark Phantom integrates all rear lighting functions into one lamp, eliminating the need for multiple model variants for different applications. It supports both dynamic and conventional turn signal operation, allowing the same product to meet the requirements of various vehicle types and customer preferences.

The appearance can be tailored with two bezel options: black or chrome. This allows the lamp to complement the styling of different vehicles.
Installation is made easier by a 5-metre ADR cable, providing ample wiring length and allowing flexible mounting without the need for additional extension cables. The lamp complies with applicable vehicle lighting regulations and carries both D and Y approvals, ensuring its suitability for on-road use.

The Optibeam Dark Phantom combines classic round styling, versatile functionality, and easy installation in a single product. The result is a clean, modern Optibeam rear lamp that simplifies rear lighting solutions while enhancing the appearance of any vehicle.

OPTIBEAM DARK PHANTOM TAIL LIGHT

Direction indicator, tail, brake, reverse, fog light, incl. black and chrome mounting ring, shock resistant, can also be installed in sets of two or three.

Input voltage	10-28 V	
Wattage	LED rear position light	0,48 W
	LED brake light	4,3 W
	LED direction indicator	1,68 W
	LED reverse light	2,16 W
	LED rear fog light	1,2 W
LED	6 x LED	
IP rating	IP67	
Cable	500 cm, 7-pin. open cable end	
Size (W x H x D)	Ø 155,05 x (111,3) x 42 mm	
Approvals	R148, R10, D- and Y-approved	

1608-3200
1608-3201 (bulk)



Marker lights



NEW ARRIVAL



OPTIBEAM DARK PHANTOM

Marker light, side / rear / front. Hole spacing 58 mm, incl. mounting rubbers for pipe and surface mounting: thickness with straight mounting rubber 8,5 mm and with pipe adapter 11,8 mm, cable entry ø 11,6mm, ADR-cable.

Color	Amber	Red	White
Input voltage	10-36 V	10-36 V	10-36 V
Wattage	0,68 W in 36 V	1,04 W in 36 V	0,61 W in 36 V
LED	3 x LED	3 x LED	3 x LED
Mounting position	Side marker light	Rear position light	Front position light
Color temperature	-	-	6000-6500 K
IP rating	IP67	IP67	IP67
Cable	50 cm, 2-pin. open cable ends	50 cm, 2-pin. open cable ends	50 cm, 2-pin. open cable ends
Size (W x H x D)	79,5 x 22,5 mm	79,5 x 22,5 mm	79,5 x 22,5 mm
Approvals	R148, R10	R148, R10	R148, R10
	1608-3202 (blister) **1608-3205** (bulk)	**1608-3203** (blister) **1608-3206** (bulk)	**1608-3204** (blister) **1608-3207** (bulk)

NEW ARRIVAL



OPTIBEAM DARK PHANTOM

Marker light, side / rear / front. Shock resistant, hole distance 61,5 mm, ADR-cable.

Color	Amber	Red	White
Input voltage	10-36 V	10-36 V	10-36 V
Wattage	0,54 W in 36 V	1,1 W in 36 V	0,61 W in 36 V
LED	3 x LED	3 x LED	3 x LED
Mounting position	Side marker light	Rear position light	Front position light
Color temperature	-	-	6000-6500 K
IP rating	IP67	IP67	IP67
Cable	50 cm, 2-pin. open cable ends	50 cm, 2-pin. open cable ends	50 cm, 2-pin. open cable ends
Size (W x H x D)	85,4 x 28,1 mm	85,4 x 28,1 mm	85,4 x 28,1 mm
Approvals	R148, R10	R148, R10	R148, R10
	1608-3208 (blister) **1608-3211** (bulk)	**1608-3209** (blister) **1608-3212** (bulk)	**1608-3210** (blister) **1608-3213** (bulk)





OPTIBEAM DARK PHANTOM

Marker light, side / rear / front. Flush mounting, EPDM grommet.

Color	Amber	Red	White
Input voltage	8-32 V	8-32 V	8-32 V
Wattage	0,5 W	0,5 W	0,5 W
Mounting position	Side marker light	Rear marker	Front marker
IP rating	IP67	IP67	IP67
Cable	21 cm, 2-pin. open cable ends	21 cm, 2-pin. open cable ends	21 cm, 2-pin. open cable ends
Size (W x H x D)	18,9 x 16,2 mm	18,9 x 16,2 mm	18,9 x 16,2 mm
Approvals	R148, R10	R148, R10	R148, R10
	1608-3100 (blister) **1608-3103** (bulk)	**1608-3101** (blister) **1608-3104** (bulk)	**1608-3102** (blister) **1608-3105** (bulk)

Marker lights





NEW ARRIVAL

OPTIBEAM DARK PHANTOM

LED position light, side / rear / front. Hole spacing 213 mm, shock resistant, ADR cable.

Color	Amber	Red	White
Input voltage	10-36 V	10-36 V	10-36 V
Wattage	1,76 W in 36 V	1,83 W in 36 V	1,68 W in 36 V
LED	9 x LED	9 x LED	9 x LED
Mounting position	Side marker light	Rear position light	Front position light
Color temperature	-	-	6000-6500 K
IP rating	IP67	IP67	IP67
Cable	50 cm, 2-pin. open cable ends	50 cm, 2-pin. open cable ends	50 cm, 2-pin. open cable ends
Size (W x H x D)	239,4 x 24,6 x 14,5 mm	239,4 x 24,6 x 14,5 mm	239,4 x 24,6 x 14,5 mm
Approvals	R148, R10	R148, R10	R148, R10
	1608-3214 (blister) **1608-3217** (bulk)	**1608-3215** (blister) **1608-3218** (bulk)	**1608-3216** (blister) **1608-3219** (bulk)

NEW ARRIVAL



OPTIBEAM DARK PHANTOM

LED position light, side / rear / front. Four installation arm options available, shock resistant, ADR cable.

Color	Amber	Red	White
Input voltage	10-32 V	10-32 V	10-32 V
Wattage	0,72 W in 24 V	1,44 W in 24 V	0,96 W in 24 V
LED	6 x LED	6 x LED	6 x LED
Mounting position	Side marker light	Rear position light	Front position light
IP rating	IP67	IP67	IP67
Cable	500 cm, 2-pin. open cable ends	500 cm, 2-pin. open cable ends	500 cm, 2-pin. open cable ends
Size (W x H x D)	ø 70,4 x (57,5) x 31,8 mm	ø 70,4 x (57,5) x 31,8 mm	ø 70,4 x (57,5) x 31,8 mm
Approvals	R148, R10	R148, R10	R148, R10
	1608-3220	**1608-3221**	**1608-3222**

Accessories



NEW ARRIVAL



OPTIBEAM DARK PHANTOM FLEXIBLE ARM, SMALL

For two LED-position lights, head ø 78 mm, mounting base: 99 x 50mm, six holes, hole dimensions for four corner holes: 72 x 30 mm and for 2 middle ones 78 mm. Suitable with moduls: 1608-3220 (amber), 1608-3221 (red), 1608-3222 (white).

1608-3300

NEW ARRIVAL



OPTIBEAM DARK PHANTOM FLEXIBLE ARM, MIDDLE, 90°

For two LED-position lights, head ø 78,7 mm, mounting base: 99 x50 x 12mm, six holes, dimensions for four corner holes: 72 x 30 mm and for 2 middle ones 78 mm. Suitable with moduls: 1608-3220 (amber), 1608-3221 (red), 1608-3222 (white).

1608-3301



OPTIBEAM DARK PHANTOM FLEXIBLE ARM, LARGE, 90°

For two LED-position lights, head ø 79 mm, mounting base: 99 x 50 x 12 mm, six holes, dimensions for four corner holes: 72 x 30mm and for 2 middle ones 78 mm. Suitable with moduls: 1608-3220 (amber), 1608-3221 (red), 1608-3222 (white).

1608-3302

NEW ARRIVAL

NEW ARRIVAL



OPTIBEAM DARK PHANTOM FLEXIBLE ARM, SMALL

For one LED-position light, head ø 78 mm, mounting base: 99 x 50mm, six holes, hole dimensions for four corner holes: 72 x 30mm and for 2 middle ones 78 mm. Suitable with moduls: 1608-3220 (amber), 1608-3221 (red), 1608-3222 (white).

1608-3303

FLASHLIGHTS





Ledwise

LEGEND GEN 2

WHITE LIGHT



LEDWISE

Legend gen 2, cold light. Flashlight, 3500 mAh battery with protection circuit, magnetic USB charging cable, metal belt clip, headband, 2 extra O-rings, user instructions FI/EN.

LED type	CREE XHP50.2
OTF lumens	1500 lm
Color temperature	6000 K
IP class	IP69
Intensity	4200 cd
Beam distance	130 m
Power / battery capacity	3500 mAh 18650 lithium
Size (W x H x D)	110 x 25 mm, light head 29 mm
Weight	65 g without battery

1700-AT781

LEGEND GEN 2

WARM LIGHT



LEDWISE

Legend gen 2, warm light. Flashlight, 3500 mAh battery with protection circuit, magnetic USB charging cable, metal belt clip, headband, 2 extra O-rings, user instructions FI/EN.

LED type	CREE XHP50.2
OTF lumens	1500 lm
Color temperature	4000 K
IP class	IP69
Intensity	4200 cd
Beam distance	130 m
Power / battery capacity	3500 mAh 18650 lithium
Size (W x H x D)	110 x 25 mm, light head 29 mm
Weight	65 g without battery

1700-AT782

RECON 330



LEDWISE

Recon 330. Flashlight, 2 x 5000 mAh battery (26650 Li-Ion), 12 V wall bracket/charger, orange traffic cone, user manual FI/EN.

LED type	CREE XP-L HD
OTF lumens	930 lm
Color temperature	6000 K
IP class	IPX7
Intensity	47440 cd
Beam distance	430 m
Power / battery capacity	2 x 5000 mAh 26650 USB chargeable Li-Ion
Size (W x H x D)	323 x 37 mm, light head 50 mm
Weight	760 g with batteries

1700-AT787

SCOUT GEN 2



LEDWISE

Scout Gen 2. Flashlight.

LED type	SST 70
OTF lumens	2080 lm
Color temperature	6000 K
IP class	IP68
Intensity	15587 cd
Beam distance	250 m
Power / battery capacity	2600 mAh 18650 lithium
Size (W x H x D)	Ø 34 (light head) x 140 mm
Weight	122 g without battery

1700-AT810

L'ONE



LEDWISE

L'One. Flashlight, holster, 2 spare o-ring, manual, pocket clip, tail cap, lanyard. 2 x AAA batteries not included.

LED type	CREE XP-G2
OTF lumens	200 lm
Color temperature	6000 K
IP class	IPX8
Intensity	1600 cd
Beam distance	60 m
Power / battery capacity	2 x AAA alkaline / NiMH (not included)
Size (W x H x D)	128 mm x 15,3 mm
Weight	31,2 g without batteries

1700-AT788

SAINT



LEDWISE

Saint. Flashlight, 650 mAh battery (16340, Li-Ion), belt case, USB cable, metal clip and an extra O-ring.

LED type	CREE XP-L
OTF lumens	1000 lm
Color temperature	6000 K
IP class	IPX8
Intensity	4500 cd
Beam distance	150 m
Power / battery capacity	650 mAh 16340 lithium
Size (W x H x D)	93 x 25 mm, light head 25 mm
Weight	73 g without battery

1700-AT784



LEDWISE

Flashlight. Also available with black gift box.

LED type	CREE XPG3
OTF lumens	600 lm
Color temperature	6000 K
IP class	IPX4
Beam distance	100 m
Power / battery capacity	18650 lithium
Size (W x H x D)	107 x 26 mm, light head 27 mm
Weight	50 g without batteries

1700-AT789GB (gift box)



SP ECO KIT

LEDWISE

SP Eco kit. Flashlights, batteries (2200mAh 18650 Li-Ion + 700mAh 16340 Li-Ion), detachable clip and a magnetic USB charging cable, user instructions FI/EN.

	Large	Small
LED type	CREE XPG3	CREE XPG3
OTF lumens	600 lm	600 lm
Color temperature	6000 K	6000 K
IP class	IPX4	IPX4
Beam distance	100 m	90 m
Power / battery capacity	2200mAh 18650 lithium	700mAh 16340 lithium
Size (W x H x D)	107 x 26 mm, light head 27 mm	73 x 26 mm, light head 27mm
Weight	50 g without batteries	50 g without batteries

1700-AT780

Ledwise Work

The powerful Ledwise LED strip light delivers a luminous output of 1500 lumens per meter. Thanks to its high color rendering index (CRI >82), the light is natural and brings out the true colors of the surroundings. With its excellent color accuracy and 4000 K color temperature, this LED strip is ideal for tasks that require precision and for highlighting surface details.

Perfectly suited for both professional and home use, the LED strip has virtually unlimited application possibilities. It is especially beneficial in renovation sites, construction areas, workshops, and other challenging lighting environments. With its IP65 protection rating, the strip is also suitable for outdoor use—ideal for illuminating terraces, yards, sports fields, fences, or even the exterior walls of a building. Its dark-toned appearance blends seamlessly into dark surfaces when the light is not in use.



3 m LED work light strip
180 x LED / meter, 36 W / meter,
1500 lm / meter, CRI 82+, 4000 K.

1700-AT100



5 m LED work light strip
180 x LED / meter, does not include mains power plug (230 V), product codes 1700-AT114 or 1700-AT115 sold separately.

1700-AT101



10 m LED work light strip
180 x LED / meter, does not include mains power plug (230 V), product codes 1700-AT114 or 1700-AT115 sold separately.

1700-AT102



15 m LED work light strip
180 x LED / meter, does not include mains power plug (230 V), product codes 1700-AT114 or 1700-AT115 sold separately.

1700-AT103



20 m LED work light strip
180 x LED / meter, does not include mains power plug (230 V), product codes 1700-AT114 or 1700-AT115 sold separately.

1700-AT104



25 m LED work light strip
180 x LED / meter, does not include mains power plug (230 V), product codes 1700-AT114 or 1700-AT115 sold separately.

1700-AT105



50 m LED work light strip
180 x LED / meter, does not include mains power plug (230 V), product codes 1700-AT114 or 1700-AT115 sold separately.

1700-AT106

WORK LINE

Ledwise Work



15 m LED work light strip, reel
The LED strip operates on standard mains voltage of 230 V.

1700-AT107



25 m LED work light strip, reel
The LED strip operates on standard mains voltage of 230 V.

1700-AT7108



50 m LED work light strip, reel
The LED strip operates on standard mains voltage of 230 V.

1700-AT109

Light strip accessories

1700-AT110	Ledwise Work mounting rail for light strips
1700-AT111	Ledwise Work fasteners for light strips
1700-AT112	Ledwise Work 2-way Y-splitter for LED strip lights
1700-AT113	Ledwise Work 3-way Y-splitter for LED strip lights
1700-AT114	Ledwise Work power plug, max. 50 m
1700-AT115	Ledwise Work power plug, max. 100 m

WORK LINE



Ledwise Work



LEDWISE

Work line, slim work light. Rechargeable.

LED type	COB LED
OTF lumens	620 lm
Color temperature	6000 K
IP class	IP54
Intensity	285 cd
Beam distance	33 m
Power / battery capacity	3.7 V 2600 mAh Li-ion
Size (W x H x D)	41 x 341 x 60 mm
Weight	304 g

1700-AT829



LEDWISE

Work line headlamp.

LED type	COB LED
OTF lumens	300 lm
Color temperature	5700 K
IP class	IPX5
Intensity	125 cd
Beam distance	11 m
Power / battery capacity	1500 mAh LI-Po battery
Size (W x H x D)	78 x 47,5 x 42 mm
Weight	107 g with battery

1700-AT771



LEDWISE

Work line inspection hand lamp + magnetic charging station.

LED type	COB LED-cri80+
OTF lumens	600 lm
Color temperature	6500 K
IP class	IP54
Intensity	240 cd
Beam distance	30 m
Power / battery capacity	3.7 V 2600 mAh Li-ion
Size (W x H x D)	54 x 189 x 28 mm
Weight	253 g

1700-AT830

Ledwise - accessories



Helmet mount, Petzl. For Legend headlamps.

1700-AT851



Velcro mount. For Legend headlamps.

1700-AT852



18650 battery. 3.7V Li-Ion, 3500 mAh. For Ledwise Legend 2 lights.

1700-AT7998



26650 battery. 3.7 V Li-Ion, 5000 mAh, 18.5Wh, with safety circuit. An integrated micro-USB charging connector on the side. Package contains 2 pcs.

1700-AT7991



Charger. For 4 x Legend lights.

1700-AT7997



Charging cable. For Legend lights.

1700-AT7999



Battery charger. Universal, for two batteries.

1700-AT850

ACCESSORIES

Support bars


1.


2.


3.


4.

1.	1605-NS31	Flat, 200mm, 2 pcs, chrome
2.	1605-NS32	Flat, 200mm, 2 pcs, black
3.	1605-NS32RST	Flat, 200mm, 2 pcs, black, stainless steel
4.	1605-NS33RST	Round 200mm, 2 pcs, black RST, 110-240 mm

Mounts

OPTIBEAM

1605-NS58	Ø 32 mm, stainless steel
1605-NS50	Ø 43 mm, stainless steel
1605-NS54	Ø 48 mm, stainless steel
1605-NS51	Ø 60 mm, stainless steel
1605-NS53	Ø 63 mm, stainless steel
1605-NS57	Ø 70 mm, stainless steel
1605-NS52	Ø 76 mm, stainless steel

W-Light

1605-NS50-B	Ø 43 mm, stainless double-coated black
1605-NS51-B	Ø 60 mm, stainless double-coated black
1605-NS53-B	Ø 63 mm, stainless double-coated black
1605-NS52-B	Ø 76 mm, stainless double-coated black



Fasteners


1.


2.

1.	1605-NS30	Counterpart for top support, w. screw, suitable for NS10, NS1011, NS1010, NS20, NS2021, NS2020
2.	1605-NS36	Sliding bracket, to the lightbar, for example NS10/NS1010

Stone covers



1.	1605-NS209	W-Light Fury 9 Stone cover

License plate brackets



1.



2.



3.



4.



5.



6.



7.



8.



9.



10.



11.



12.

1.	1605-3022	Auxiliary light rack, behind the license plate, EU plate, rustproof, HD model, thickness 3mm
2.	1605-3023	Auxiliary light rack, for three head lights, to the backside of register plate, EU shield, painted black, model HD, thickness 3mm
3.	1605-3024	Auxiliary light rack, behind the license plate, EU plate, painted black, HD model, thickness 3 mm
4.	1605-3025	Auxiliary light rack, for three round lights, behind the EU license plate, material: black painted 3 mm aluminum
5.	1605-3028	Auxiliary light rack, stainless steel, for 3 lamps, behind the EU sized license plate, HD model, thickness 3mm
6.	1605-3030	Auxiliary light rack, behind the license plate, EU-plate, aluminium (black)
7.	1605-3036	Behind the license plate, black, 389 mm
8.	1605-3037	Behind the license plate, EU-plate, black, 430 mm
9.	1605-3038	Auxiliary light rack, behind the license plate, EU-plate, roster, distance between mounting holes 350 - 545mm, 566 mm
10.	1605-3065	Auxiliary light rack for Optibeam Pure 506
11.	1605-3064	Auxiliary light rack for Optibeam Super Captain One 600
12.	1605-3049	Auxiliary light rack for Optibeam Super Captain Dual 600



NEW ARRIVAL

NEW ARRIVAL

1605-WK200
Switch panel for 8 devices.

- Voltage 12-24 V DC
- Max. current 600 W @ 12 V / 1200 W @ 24 V
- Max. current 60 A
- IP67
- 8 circuits: 2 x 5 A, 2 x 10 A, 2 x 20 A, 2 x 30A
  Each circuit with individual GM fuse.

1605-WK201
Switch panel for 8 devices.

- Voltage 12-24V DC
- Max. current 720W @ 12V / 1440W @ 24V
- Max. current 60A
- 8 circuits 2 x 10A, 2 x 15A, 2 x 20A, 2 x 30A.
  Each circuit with individual GM fuse.
- Programmable buttons:
  ON/OFF / Momentary / Slow flash / Strobe

1605-WK202
Switch panel for 4 devices.

- Voltage 12-24V DC
- Max. current 720W @ 12V / 1440W @ 24V
- Max. current 60A
- 4 circuits 10A, 15A, 20A, 30A.
  Each circuit with individual GM fuse.
- Programmable buttons:
  ON/OFF / Momentary / Slow flash / Strobe

SET A

1605-WK050
DT 2 -extension cable

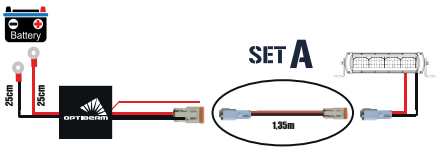

SET B

1605-WK051
DTP 2 -extension cable



SET C

1605-WK052
Switch set for auxiliary lamps

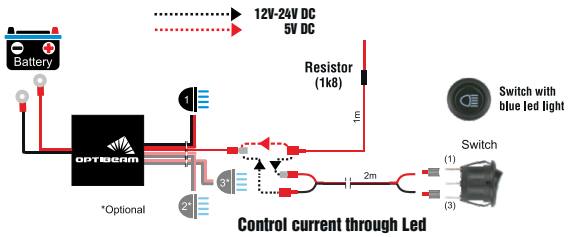

1605-WK047
DT3 - DT3 extension cable 2m, suitable for 1605-WK034 connection kit. Suitable for 1605-NS3000.



PLUG & DRIVE CONNECTION KITS –
The fastest way to connect auxiliary lamps

Contemporary semi conductor connection kits are extremely reliable, save time and costs and guarantee professional standard couplings for all kind of auxiliary light combinations.

SET 1

1605-WK031
For 1 auxiliary light with DT 2 -connection
Max 12V 200W 24V 400W

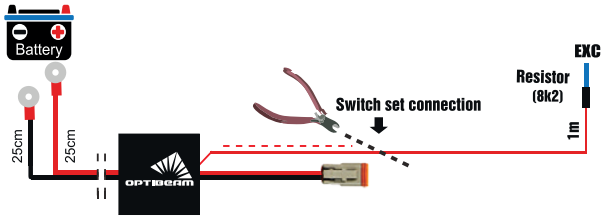

SET 2

1605-WK032
For 2 auxiliary lights with 2 x DT 2 –connection
Max 12V 2 x 135W 24V 2 x 270W

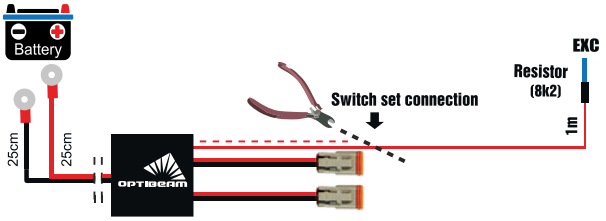

SET 4

1605-WK034
For 1 auxiliary light with parking light and DT 3 -connection
Max 12V 200W 24V 400W

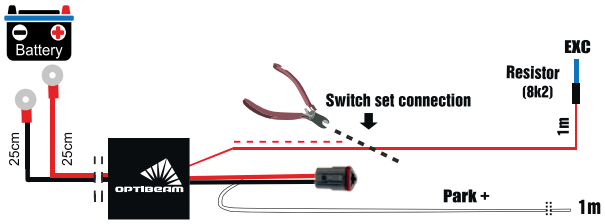

SET 5

1605-WK035
For 1 auxiliary light with DTP 2 -connection
Max 12V 270W 24V 540W

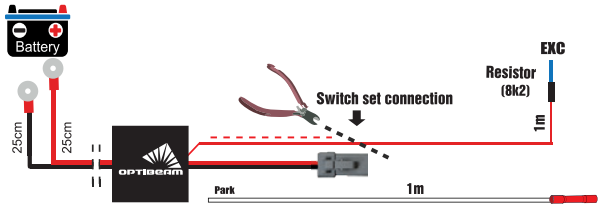

SET 6

1605-WK036
For 2 auxiliary lights with 2 x DTP 2 -connection
Max 12V 2 x 135W 24V 2 x 270W

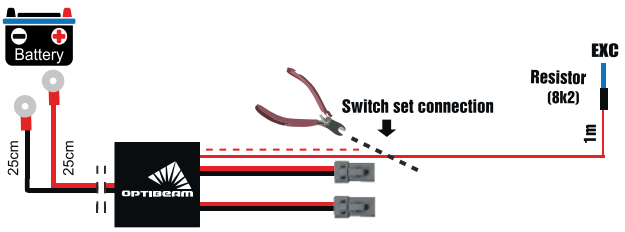

SET 10

1605-WK043
For 3 auxiliary lights with parking light and 3 x DT 3-connection
Max 12V 3 x 90W 24V 3 x 180W

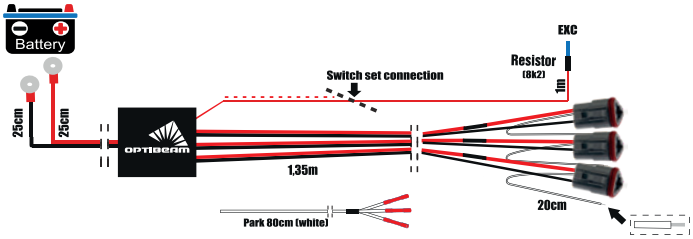

SET 11

1605-WK044
For 1 auxiliary light with DTP 4 -plug
Max 12V 270W 24V 540W

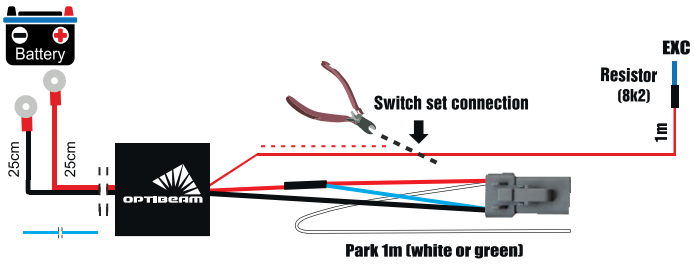

SET 13

1605-WK046
For 3 auxiliary lights with 3 x DT 4 -plug
Max 12V 3 x 150W 24V 3 x 300W

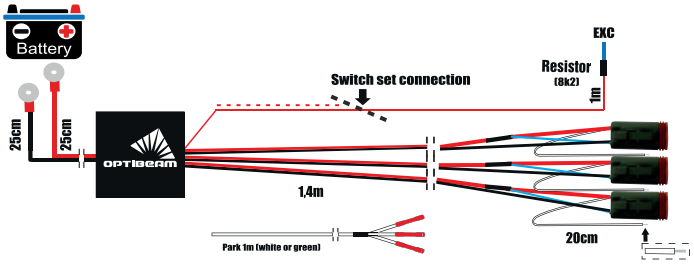

SET 14

1605-WK048
For 1 auxiliary lights with DT 4 -plug
Max 12V 200W 24V 400W

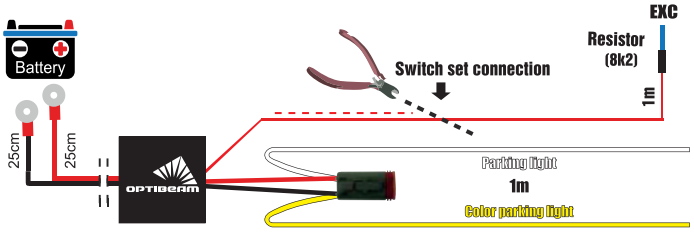

SET 15

1605-WK055
For 2 auxiliary lights with 2 x DTP 4 -plug
Max 12V 2 x 135W 24V 270W

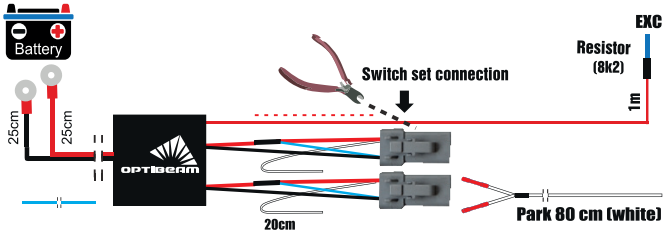

Connection kits - Autoline

For one light

NEW ARRIVAL



Autoline connection kit, 1 x DT 2	
Fuse	25 A
Relay	40 A
Wire	2 mm²

1605-WK018



Autoline connection kit, 1 x DT 2	
Fuse	25 A
Wire	2 mm²

1605-WK099



Autoline connection kit, 1 x DTP 2	
Fuse	30 A
Relay	40 A
Wire	2,5 mm²

1605-WK021



Autoline connection kit, 1 x DT 3	
Fuse	25 A
Relay	40 A
Wire	2,5 mm²

1605-WK062



Autoline connection kit, 1 x DTP 4	
Fuse	25 A
Relay	40A
Wire	2,5 mm²

1605-WK063



Autoline connection kit, 1 x DT 4	
Fuse	25 A
Relay	40 A
Wire	2,5 mm²

1605-WK068

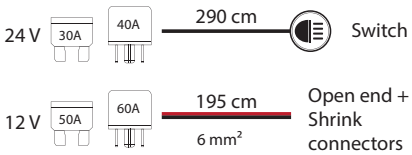

Autoline connection kit, open cable ends	
Fuse	12 V: 50 A, 24 V: 30 A
Relay	12 V: 60 A, 24 V: 40 A
Wire	6 mm²

1605-WK069



AUTOLINE®

For two lights

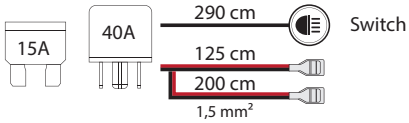

Autoline connection kit, 2 x blade terminals	
Fuse	15 A
Relay	40 A
Wire	1,5 mm²

1605-WK005L

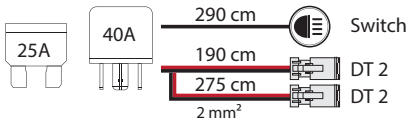

Autoline connection kit, 2 x DT 2	
Fuse	25 A
Relay	40 A
Wire	2 mm²

1605-WK023



Autoline connection kit with remote control, 2 x blade terminals	
Fuse	30 A
Wire	2 mm²

1605-WK022



Autoline connection kit, 2 x blade terminals	
Fuse	30 A
Relay	40 A
Wire	2,5 mm²

1605-WK020



Autoline connection kit, 2 x DT 4	
Fuse	30 A
Relay	40 A
Wire	4 mm²

1605-WK064

For three lights

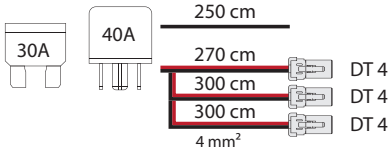

Autoline connection kit, 3 x DT 4	
Fuse	30 A
Relay	40 A
Wire	4 mm²

1605-WK065

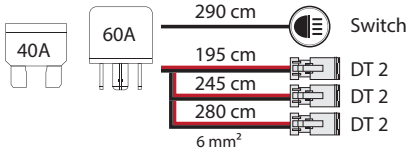

Autoline connection kit, 3 x DT 2	
Fuse	40 A
Relay	60 A
Wire	6 mm²

1605-WK066

CAN-BUS



XBB power unit 6

Connect the power supply 9-36V to the PowerUnit-6. The PowerUnit-6 is an advanced power control module with six programmable outputs, each supporting up to 10A. It is designed to provide reliable control of auxiliary electrical equipment such as LED light bars, work lights, and other electrical consumers in vehicle applications. Need to connect with the XBB Dongle.

1605-WK096



XBB dongle

The XBB Dongle® is a CAN-bus interface that stands out from other products on the market. Unlike all other solutions, no electronics are connected directly to the vehicle's internal CAN-bus network. Instead, the XBB Dongle® utilizes the information available through the vehicle's diagnostic port.

1605-WK097



Dongle kit

A new type of switching device for auxiliary lights and other accessories. The Dongle unit, which is inserted into the OBD plug, receives the additional light output information directly from the car's CAN bus and sends it wirelessly to the Power Unit relay. The dongle is configured with the XBB app, which is downloadable to the phone, and is available for Android and IOS operating systems. Wireless data transfer between devices facilitates and helps when there is no need to pull wires between the car's interior and the engine room.

1605-WK070



Contactless reader

5V, inductive reader, allows the CAN Bus interface to read vehicle CAN Bus data without any actual metal to metal connection. Reader is secured around the vehicle CAN Bus wiring, data is read by an induction method, protects any manufacturers warranty, directly compatibility w. Cannect range of Interfaces, strong locking clamp to retain position around the CAN wiring: wire must first be straightened for a short distance and the HI - LO wires identified and placed in to the corresponding channels of the reader before the reader housing can be closed over the wiring.

1605-WK009



CAN bus relay

12/24V, for lights, CAN-channel compatible. For installing of additional head lights (via a relay) which are switched on when the high beam is active, also for new Volvo cars LIN-BUS system.

1605-WK008



CAN bus interface

12V, provides a speed signal for taxi meter or other accessories. output = 12V square pulse: 1 pulse per 1mph (appr. 1.6km/h).

1605-WK016



LED control unit

LED controller unit that enables, for example, a parking or work light to flash like a warning light or steady blinker. With this controller, any suitable light up to 35W can be converted into a continuously flashing light, depending on the vehicle's needs. The controller unit is installed between the power source, the light, and the switch.

1605-WK089



Connection kit, OBD Tesla

For connecting additional lights etc. via the XBB Dongle, compatible with Tesla Model 3/Y 2019–

1605-WK088



CAN bus interface

4-channel CAN bus relay CANM8 CANNECT HIGHBEAM-4. For connecting additional high beam lights that operate in sync with the car's original lights via the CAN bus (through the relay). This allows an effortless control signal to be provided to the additional lights' relay. Also provides "power on," "parking light," and "reverse" signals for controlling additional devices that require them. Quick and easy installation, "key in position" function enables the "power on" signal to remain active even after power off, as long as the key is still in the ignition, in compatible cars.

1605-WK084



OBD-II Y-Cable 300mm.

1605-WK071



Extra Power Unit Relay for Dongle

15A + 5A.

1605-WK070-1



Xbb smart button

1605-WK078



Interference eliminator

1608-1016



Autoline connection kit for XBB-relay

XBB-relay sold separately

1605-WK067

PRODUCT LISTS



Product lists

Bullboy Proline	Product no:	Product name	Package size	EAN	Page
	**1603-300815**	BULLBOY PROLINE MINI LED WORK LIGHT 400 lm, 79 x 49 x 24 mm		6 438255 498152	9
	**1603-300270**	BULLBOY PROLINE LED WORK LIGHT 1153 lm, 114 x 146 x 52 mm	24	6 438255 002700	12
	**1603-300363**	BULLBOY PROLINE LED WORK LIGHT, BLACK 1771 lm, 139 x 45 x 70 mm	20	6 438255 013638	13
	**1603-300328**	BULLBOY PROLINE LED WORK LIGHT, WHITE 1771 lm 139 x 45 x 70 mm	20	6 438255 013287	13
	**1603-300814**	BULLBOY PROLINE MINI LED WORK LIGHT 1970 lm, 100 (115,5) x 19 x 42 (53,7) mm	60	6 438255 498145	13
	**1603-300367**	BULLBOY PROLINE LED WORK LIGHT 12000 lm, 270 x 190 (215) x 75 mm	2	6 419943 583077	28

Bullboy Proline Spectrum	Product no:	Product name	Package size	EAN	Page
	**1603-300235**	BULLBOY PROLINE SPECTRUM SLIM LED WORK LIGHT 1430 lm, 157 x 39 x 50 (52) mm	20	6 438255 002359	12
	**1603-300236**	BULLBOY PROLINE SPECTRUM SLIM LED WORK LIGHT 2150 lm	20	6 438255 002366	16
	**1603-300230**	BULLBOY PROLINE SPECTRUM ELLIPSE 24 LED WORK LIGHT 2650 lm, 75 x 68 x 41 mm	40	6 438255 002304	16
	**1603-300231**	BULLBOY PROLINE SPECTRUM SQUARE 24 LED WORK LIGHT 2750 lm, 70 x 70 x 41 mm	40	6 438255 002311	16
	**1603-300232**	BULLBOY PROLINE SPECTRUM ELLIPSE 54 LED WORK LIGHT 6020 lm, 109 x 101 x 45 mm	20	6 438255 002328	27
	**1603-300233**	BULLBOY PROLINE SPECTRUM SQUARE 54 LED WORK LIGHT 6050 lm, 101 x 101 x 45 mm	20	6 438255 002335	27
	**1603-300234**	BULLBOY PROLINE SPECTRUM SQUARE 96 LED WORK LIGHT 9240 lm, 112 x 112 x 55 mm	20	6 438255 002342	28

Bullboy Proline	Product no:	Product name	Package size	EAN	Page
	**1603-300802**	BULLBOY PROLINE LED WORK LIGHT 580 lm, 57,6 x 32,6 x 23,8 mm	100	6 438255 498022	9
	**1603-300801**	BULLBOY PROLINE LED WORK LIGHT 1350 lm, 75 x 75 x 39,5 mm	40	6 438255 498015	12
	**1603-300803**	BULLBOY PROLINE LED WORK LIGHT 1410 lm, 157,2 x 39,2 x 40,2 mm	48	6 438255 498039	12

BULLBOY PROLINE

Bullboy Proline Bully	Product no:	Product name	Package size	EAN	Page
	**1603-300727**	BULLBOY PROLINE BULLY 3000 LED WORK LIGHT 3340 lm, 76 x 76 (92) x 63 mm	24	6 438255 107276	20

Bullboy Proline Centum	Product no:	Product name	Package size	EAN	Page
	**1603-300458**	BULLBOY PROLINE CENTUM LED WORK LIGHT 4500 K 8210 lm, 113 x 113 x 76,4 mm	12	6 438255 004582	28
	**1603-300457**	BULLBOY PROLINE CENTUM LED WORK LIGHT 6000 K 8136 lm, 113 x 113 x 76,4 mm	12	6 438255 004575	28

Bullboy Proline	Product no:	Product name	Package size	EAN	Page
	**1603-300789**	BULLBOY PROLINE LED WORK LIGHT BAR, SINGLE 255 5500 lm, 255 x 50,5 (74,1) x 50 mm	6	6 438255 916465	36
	**1603-300790**	BULLBOY PROLINE LED WORK LIGHT BAR, SINGLE 578 12600 lm, 578 x 50,5 (74,1) x 50 mm	4	6 438255 916472	36
	**1603-300791**	BULLBOY PROLINE LED WORK LIGHT BAR, SINGLE 793 17500 lm, 793 x 50,5 (74,1) x 50 mm	4	6 438255 916489	36
	**1603-300792**	BULLBOY PROLINE LED WORK LIGHT BAR, SINGLE 1010 23900 lm, 1010 x 50,5 (74,1) x 50 mm	4	6 438255 916496	36
	**1603-300793**	BULLBOY PROLINE LED WORK LIGHT BAR, SINGLE 1230 33600 lm, 1225 x 50,5 (74,1) x 50 mm	4	6 438255 916502	36
	**1603-300794**	BULLBOY PROLINE LED WORK LIGHT BAR, DOUBLE 289 7720 lm, 289 x 75,5 (97,8) x 50,5 mm	6	6 438255 916519	37
	**1603-300795**	BULLBOY PROLINE LED WORK LIGHT BAR, DOUBLE 532 14500 lm, 532 x 75,5 (97,8) x 50,5 mm	4	6 438255 916526	37
	**1603-300796**	BULLBOY PROLINE LED WORK LIGHT BAR, DOUBLE 774 22500 lm, 774 x 75,5 (97,8) x 50,5 mm	4	6 438255 916533	37
	**1603-300797**	BULLBOY PROLINE LED WORK LIGHT BAR, DOUBLE 1017 28200 lm, 1017 x 75,5 (97,8) x 50,5 mm	4	6 438255 916540	37
	**1603-300798**	BULLBOY PROLINE LED WORK LIGHT BAR, DOUBLE 1260 35800 lm, 1260 x 75,5 (97,8) x 50,5 mm	4	6 438255 916557	37

Bullboy Proline Aura	Product no:	Product name	Package size	EAN	Page
	**1605-5004**	BULLBOY PROLINE AURA HEAD LIGHT, RIGHT 2424 lm / 1211 lm, 340 x 75 x 85,3 mm	6	6 438255 050046	42
	**1605-5005**	BULLBOY PROLINE AURA HEAD LIGHT, LEFT 2424 lm / 1211 lm, 340 x 75 x 85,3 mm	6	6 438255 050053	42

Product lists

BULLBOY PROLINE

Bullboy Proline	Product no:	Product name	Package size	EAN	Page
	**1604-12013**	BULLBOY PROLINE WIRELESS REMOTE CONTROLLED SEARCH LIGHT 2436 lm, 182 x 190 x 164 mm	4	6 438255 020131	39

BULLBOY

Bullboy	Product no:	Product name	Package size	EAN	Page
	**1603-300823**	BULLBOY LED WORK LIGHT 521 lm, 110 x 43 x 135 mm	20	6 438255 498237	11
	**1603-300384**	BULLBOY LED WORK LIGHT 2495 lm, 108 x 108 (128) x 68 mm	20	6 438255 003844	18
	**1603-300825**	BULLBOY LED WORK LIGHT 612 lm, 160 x 45 x 70 mm	20	6 438255 498251	11

BULLBOY AGRILINE

Bullboy Agriline	Product no:	Product name	Package size	EAN	Page
	**1603-300285**	BULLBOY AGRILINE SPRAYER LIGHT PAIR 379 lm, 85 x 85 (118) x 38 mm	20	6 438255 002854	10
	**1603-300409**	BULLBOY AGRILINE LED MINI WORK LIGHT 547 lm, Ø 57x 65 mm	20	6 438255 004094	10
	**1603-300262**	BULLBOY AGRILINE LED REVERSING / WORK LIGHT 989 lm, 150 x 53 x 56 mm	20	6 438255 102622	10
	**1603-300799**	BULLBOY AGRILINE LED WORK LIGHT SQUARE 1200 lm, 59 x 59 x 52 mm	16	6 438255 497995	13
	**1603-300800**	BULLBOY AGRILINE LED WORK LIGHT ROUND 1200 lm, 59 x 59 x 55 mm	16	6 438255 498008	13
	**1603-300359**	BULLBOY LED WORK LIGHT 2400 lm, 111 x 111 (126) x 69 mm	12	6 438255 013591	17
	**1603-300198**	BULLBOY AGRILINE LED WORK LIGHT, OVAL 2657 lm, 166 x 64,7 x 106,2 mm	12	6 438255 914607	17
	**1603-300199**	BULLBOY AGRILINE LED WORK LIGHT, OVAL 2737 lm, 176,4 x 117,2 x 80,1 mm	20	6 438255 001994	17
	**1603-300193**	BULLBOY AGRILINE LED WORK LIGHT 2810 lm, Ø 85 x 115 x 75 mm	10	6 438255 001932	18
	**1603-300369**	BULLBOY AGRILINE LED WORK LIGHT 2853 lm, 151 x 89,9 x 101,8 mm	12	6 438255 013690	18
	**1603-300240**	BULLBOY AGRILINE LED WORK LIGHT 2913 lm, mm	20	6 438255 022401	18

BULLBOY AGRILINE

Bullboy Agriline	Product no:	Product name	Package size	EAN	Page
	**1603-300239**	BULLBOY AGRILINE LED WORK LIGHT 3010 lm, 109 x 109 (33) x 38 mm	20	6 438255 002397	20
	**1603-300237**	BULLBOY AGRILINE LED WORK LIGHT 3010 lm, 123 (78) x 89 (72) x 70 (60) mm	20	6 438255 002373	21
	**1603-300195**	BULLBOY AGRILINE LED WORK LIGHT 3500 lm, 110 x 120 (142) x 96 mm	12	6 438255 011955	21
	**1603-300385**	BULLBOY AGRILINE LED WORK LIGHT 3827 lm, 108 x 108 (124) x 76 mm	12	6 438255 003851	21
	**1603-300197**	BULLBOY AGRILINE LED WORK LIGHT 4310 lm, 106,3 x 106,3 x 84 mm	20	6 438255 001970	24
	**1603-300196**	BULLBOY AGRILINE LED WORK LIGHT 4337 lm, 100 x 130 x 73 mm	16	6 438255 001963	24
	**1603-300194**	BULLBOY AGRILINE LED WORK LIGHT 4530 lm, 100 x 117 x 76 mm	10	6 438255 001949	24
	**1603-300261**	BULLBOY AGRILINE LED WORK LIGHT 4825 lm, 155 x 90 x 94 mm	12	6 438255 102615	24

Bullboy Agriline	Product no:	Product name	Package size	EAN	Page
	**1605-5015**	BULLBOY AGRILINE LED HEAD LIGHT	8	6 438255 050152	43
	**1605-5016**	BULLBOY AGRILINE LED HEAD LIGHT	8	6 438255 050169	43
	**1605-5008HP**	BULLBOY AGRILINE LED HEAD LIGHT 562 lm / 1837 lm, 157 x 93,5 x 80 mm	12	6 438255 050084	43
	**1605-5009HP**	BULLBOY AGRILINE LED HEAD LIGHT 571 lm / 2510 lm, 165 x 105 x 80 mm	12	6 438255 050091	43
	**1605-5012**	BULLBOY AGRILINE LED HEAD LIGHT 1100 lm / 2450 lm, 150 (215) x 150 (176) x 85 mm	4	6 438255 050121	44
	**1605-5000LED**	BULLBOY AGRILINE LED HEAD LIGHT 663 lm / 757 lm, 151 x 172 x 126 mm	8	6 438255 914591	44

Product lists

BULLBOY AGRILINE

Bullboy Scene	Product no:	Product name	Package size	EAN	Page
	**1603-300290**	BULLBOY SCENE LIGHT, WHITE 728 lm, 129 x 68 x 50 mm	40	6 438255 002908	10
	**1603-300293**	BULLBOY SCENE LIGHT, BLACK 728 lm, 129 x 68 x 50 mm	40	6 438255 002939	10
	**1603-300291**	BULLBOY SCENE LIGHT, WHITE 1475 lm, 229 x 68 x 50 mm	20	6 438255 002915	14
	**1603-300294**	BULLBOY SCENE LIGHT, BLACK 1475 lm, 229 x 68 x 50 mm	20	6 438255 002946	14
	**1603-300292**	BULLBOY SCENE LIGHT, WHITE 1994 lm, 329 x 68 x 50 mm	20	6 438255 002922	14
	**1603-300295**	BULLBOY SCENE LIGHT, BLACK 1994 lm, 329 x 68 x 50 mm	20	6 438255 002953	14

eco

Eco	Product no:	Product name	Package size	EAN	Page
	**1603-300305**	ECO LED WORK LIGHT 732 lm, 85 x 85 (118) x 38 mm	20	6 438255 003059	11
	**1605-5010**	LED LED Head light 572 lm / 787 lm, Ø 144,4 x 88 mm	12	6 438255 050107	48

BULLBOY OCEANLINE

Bullboy Oceanline	Product no:	Product name	Package size	EAN	Page
	**1603-300281**	BULLBOY OCEANLINE SEARCH LIGHT, WIDE 2554 lm, Ø 90 x 106,2 x 75 mm	18	6 438255 002816	40
	**1603-300282**	BULLBOY OCEANLINE SEARCH LIGHT, WIDE 3337 lm, 126 x 78 (101,3) x 70 mm	18	6 438255 002823	40
	**1603-300283**	BULLBOY OCEANLINE SEARCH LIGHT, WIDE 4163 lm, 103 (106,7) x 103 (126,5) x 70 mm	18	6 438255 002830	40
	**1603-300284**	BULLBOY OCEANLINE SEARCH LIGHT, WIDE 4592 lm, 135 (138,7) x 103 (126,5) x 70 mm	18	6 438255 002847	40
	**1604-12014**	BULLBOY OCEANLINE SEARCH LIGHT 2436 lm, 182 x 190 x 193 mm	4	6 438255 020148	39
	**1604-12019**	BULLBOY OCEANLINE SEARCH LIGHT 192 x 160 x 140 mm	6	6 438255 020193	39
	**1603-300464**	BULLBOY OCEANLINE SEARCH LIGHT 7591 lm, 357 x 78,5 (89,3) x 59,5 mm	9	6 438255 304644	40

NORDICLIGHTS

Nordic Lights	Product no:	Product name	Package size	EAN	Page
	**1605-989101B**	NORDIC LIGHTS SCORPIUS PRO 415 PH 1500 lm, 100 x 100 x 86 mm	12	6 420296 547197	32
	**1605-988103B**	NORDIC LIGHTS CANIS GO 420 1800 lm, 93 x 122 x 72 m	12	6 420296 542284	32
	**1605-987203B**	NORDIC LIGHTS PICTOR 620, WIDE DOWNWARDS 1800 lm, 156 x 48 mm	12	6 420296 548057	32
	**1605-987201B**	NORDIC LIGHTS PICTOR 620, WIDE UPWARDS 1800 lm, 156 x 48 mm	12	6 420296 541614	32
	**1605-987204B**	NORDIC LIGHTS PICTOR 620, WIDE UPWARDS 1800 lm, 156 x 48 mm	12	6 420296 548064	32
	**1605-987205B**	NORDIC LIGHTS PICTOR 620, WIDE DOWNWARDS 1800 lm, 156 x 48 mm	12	6 420296 548071	32
	**1605-988203B**	NORDIC LIGHTS SCORPIUS GO 420, FLOOD 1800 lm, 99 x 95 x 66 mm	12	6 420296 542291	33
	**1605-988204B**	NORDIC LIGHTS SCORPIUS GO 420, WIDE FLOOD 1800 lm, 99 x 95 x 66 mm	12	6 420296 542888	33
	**1605-982802B**	NORDIC LIGHTS KL1401 2150 lm, 110 x 137 x 74 mm	12	6 420296 541393	33
	**1605-988302B**	NORDIC LIGHTS ANTARES GO 625 2300 lm, 160 x 95 x 72 mm	12	6 420296 542383	33
	**1605-980403B**	NORDIC LIGHTS CANIS PRO 330, FLOOD 3000 lm, 84 x 84 (114) x 74 mm	12	6 420296 549986	33
	**1605-980401B**	NORDIC LIGHTS CANIS PRO 330, WIDE FLOOD 3000 lm, 84 x 84 (114) x 74 mm	12	6 420296 549948	33
	**1605-980402B**	NORDIC LIGHTS CANIS PRO 330, HIGH BEAM 3000 lm, 84 x 84 (114) x 74 mm	12	6 420296 549962	33
	**1605-9849020**	NORDIC LIGHTS SCORPIUS PRO 4500, WIDE FLOOD 4200 lm, 108 x 108 x 84 mm	12	6 420296 561681	34
	**1605-9849014**	NORDIC LIGHTS SCORPIUS PRO 2500, WIDE FLOOD 2300 lm, 108 x 108 x 84 mm	12	6 420296 561629	34
	**1605-9849026**	NORDIC LIGHTS SCORPIUS PRO 3500 S, GLARE FREE 3500 lm, 108 x 108 x 84 mm	12	6 420296 561742	34
	**1605-9849021**	NORDIC LIGHTS SCORPIUS PRO 4500, FLOOD 4200 lm, 108 x 108 x 84 mm	12	6 420296 561698	34

Product lists

Optibeam	Product no:	Product name	Package size	EAN	Page
	**1603-300753**	OPTIBEAM ROCK 590 lm, 76,6 x 46,3 x 23,9 11,3 mm	20	6 438255 027536	9

Optibeam SlimX	Product no:	Product name	Package size	EAN	Page
	**1603-300769**	OPTIBEAM SLIMX FLASH 2760 lm, 157 x 47 x 68 (90) mm	20	6 438255 107696	15
	**1603-300768**	OPTIBEAM SLIMX AMBIENT 2760 lm, 157 x 47 x 68 (90) mm	20	6 438255 107689	15
	**1603-300767**	OPTIBEAM SLIMX 4420 lm, 157 x 47 x 68 (90) mm	20	6 438255 107672	23

Optibeam	Product no:	Product name	Package size	EAN	Page
	**1603-300770**	OPTIBEAM SNOWB HEATED, MULTIKELVIN 3400 lm, 100 x 90 (119) x 45 mm	16	6 438255 107702	19
	**1603-300771**	OPTIBEAM SNOWB, MULTIKELVIN 3700 lm, 100 x 90 (119) x 45 mm	16	6 438255 107719	19

Optibeam	Product no:	Product name	Package size	EAN	Page
	**1603-300785**	OPTIBEAM E-BAR REVERSE LICENCE PLATE LIGHT 4800 lm, 534 x 157 x 25 mm	10	6 438255 107856	23

Optibeam Octax	Product no:	Product name	Package size	EAN	Page
	**1603-300720**	OPTIBEAM OCTAX 4.0 4600 lm, 115 x 115 (134) x 81 mm	10	6 438255 107207	23
	**1603-300730**	OPTIBEAM OCTAX 5.0 6100 lm, 114 x 114 (134) x 80 mm	20	6 438255 107306	25
	**1603-300721**	OPTIBEAM OCTAX 6.0 6100 lm, 115 x 115 (134) x 81 mm	10	6 438255 107214	25
	**1603-300722**	OPTIBEAM OCTAX 8.0 7400 lm, 115 x 115 (134) x 81 mm	10	6 438255 107221	25

OPTIBEAM

Optibeam Pure Elites	Product no:	Product name	Package size	EAN	Page
	**1603-300826**	OPTIBEAM ELITES 3 2700 lm, 78 x 78 (85) x 41 mm		6 438255 498268	15
	**1603-300827**	OPTIBEAM ELITES 4 5000 lm, 100 x 100 (148) x 48,2 mm		6 438255 498275	26
	**1603-300828**	OPTIBEAM ELITES 5 8500 lm, 125 x 125 (174) x 55,4 mm		6 438255 498282	26
	**1603-300829**	OPTIBEAM ELITES 5 GLARE FREE 7500 lm, 125 x 125 (174) x 55,4 mm		6 438255 498299	26

Optibeam Pure Work bars	Product no:	Product name	Package size	EAN	Page
	**1603-300780**	OPTIBEAM PURE WORK BAR 185 5000 lm, 200 x 41,6 x 64,5 mm	10	6 438255 037801	35
	**1603-300781**	OPTIBEAM PURE WORK BAR 335 10850 lm, 335 x 41,6 x 64,5 mm	10	6 438255 037818	35
	**1603-300782**	OPTIBEAM PURE WORK BAR 506 16340 lm, 507,2 x 42 x 64,5 mm	4	6 438255 037825	35
	**1603-300783**	OPTIBEAM PURE WORK BAR 730 23680 lm, 737,7 x 42 x 65 mm	4	6 438255 037832	35
	**1603-300784**	OPTIBEAM PURE WORK BAR 1025 35000 lm, 1049,5 x 43,7 x 65,8 mm	2	6 438255 037849	35

Optibeam	Product no:	Product name	Package size	EAN	Page
	**1605-5013**	OPTIBEAM AURA HEAD LIGHT, RIGHT 2340 lm / 1170 lm, 325 x 65 x 72 mm	4	6 438255 050138	41
	**1605-5014**	OPTIBEAM AURA HEAD LIGHT, LEFT 2340 lm / 1170 lm, 325 x 65 x 72 mm	4	6 438255 050145	41

Optibeam Fog rider	Product no:	Product name	Package size	EAN	Page
	**1605-NS406**	FOG LIGHT 645 lm, Ø 90 x 103 mm	20	6 438255 104060	45

Optibeam Savage	Product no:	Product name	Package size	EAN	Page
	**1605-NS2073**	OPTIBEAM SAVAGE 5” 1580 lm, Ø 127 x 78 mm	6	6 438255 020735	45
	**1605-NS2080**	OPTIBEAM SAVAGE 12” 2760 lm, 307 x 81 (109) x 87 mm	4	6 438255 020803	51

Product lists

Optibeam Se7en / Nin9	Product no:	Product name	Package size	EAN	Page
	**1605-NS2087**	OPTIBEAM SE7EN 8400 lm, Ø 178 x 190 x 82,7 mm	4	6 438255 020872	46
	**1605-NS2088**	OPTIBEAM NIN9 11400 lm, Ø 220 x 231 x 82,7 mm	4	6 438255 020889	47

Optibeam Elites 9 / Mega	Product no:	Product name	Package size	EAN	Page
	**1605-NS2117**	OPTIBEAM ELITES 7 7780 lm, Ø 178 x 75 mm	6	6 438255 021176	46
	**1605-NS2118**	OPTIBEAM ELITES 9 HEATED 9540 lm, Ø 218 x 87,5 mm	4	6 438255 021183	47
	**1605-NS2108**	OPTIBEAM ELITES 9 11320 lm, Ø 218 x 233 x 87,5 mm	4	6 438255 121081	47
	**1605-NS2109**	OPTIBEAM ELITES MEGA 7780 lm, 248 x 139 (155) x 80,5 mm	4	6 438255 121098	47

Optibeam E-bars	Product no:	Product name	Package size	EAN	Page
	**1605-NS2112**	OPTIBEAM E-BAR FIN SINGLE 7500 lm, 244 (442) x 163 x 36 mm	10	6 438255 021121	49
	**1605-NS2113**	OPTIBEAM E-BAR EU TWIN 9200 lm, 537 x 156 x 36 mm	10	6 438255 021138	49

Optibeam Elites Rally X	Product no:	Product name	Package size	EAN	Page
	**1605-NS2119**	OPTIBEAM ELITES RALLY X 6490 lm, 301 x 50 x 61 mm	14	6 438255 021190	50

Optibeam	Product no:	Product name	Package size	EAN	Page
	**1605-NS3741**	OPTIBEAM GENESIS II HYBRID 7400 lm, 548 x 72 x 92 mm	4	6 438255 037412	54
	**1605-NS3741H**	OPTIBEAM GENESIS II HEATED HYBRID 6621 lm, 548 x 72 x 92 mm	4	6 438255 037900	54

OPTIBEAM

Optibeam Pure	Product no:	Product name	Package size	EAN	Page
	**1605-NS2104**	OPTIBEAM PURE 185 6080 lm, 183 x 42 x 65 mm	4	6 438255 121043	50
	**1605-NS2105**	OPTIBEAM PURE 335 12190 lm, 335 x 42 x 65 mm	4	6 438255 121050	51
	**1605-NS2097**	OPTIBEAM PURE 506 17620 lm, 508 x 42 x 65 mm	4	6 438255 020971	52
	**1605-NS2106**	OPTIBEAM PURE 730 25670 lm, 729 x 42 x 65 mm	4	6 438255 121067	58
	**1605-NS2107**	OPTIBEAM PURE 1025 28430 lm, 1027 x 42 x 65 mm	4	6 438255 121074	60
	**1605-NS2120**	OPTIBEAM PURE 506 INTELLIGENT+ 16230 lm, 508 x 42 x 65 mm	4	6 438255 021206	52

Optibeam SC curved	Product no:	Product name	Package size	EAN	Page
	**1605-NS2100**	OPTIBEAM SUPER CAPTAIN ONE 600 CURVED 10400 lm, 532 x 47 (59) x 65 mm	8	6 438255 121005	53

Optibeam SC curved	Product no:	Product name	Package size	EAN	Page
	**1605-NS2101**	OPTIBEAM SUPER CAPTAIN DUAL 600 CURVED 21000 lm, 525 x 68,5 x 80 mm	4	6 438255 121012	52
	**1605-NS2102**	OPTIBEAM SUPER CAPTAIN DUAL 800 CURVED 32000 lm, 768 x 68,5 x 80 mm	4	6 438255 121029	58
	**1605-NS2103**	OPTIBEAM SUPER CAPTAIN DUAL 1000 CURVED 42000 lm, 1010 x 68,5 x 80 mm	2	6 438255 121036	60

Optibeam Super Captain	Product no:	Product name	Package size	EAN	Page
	**1605-NS2085**	OPTIBEAM SUPER CAPTAIN DUAL 600 19896 lm, 525 x 68 x 80 mm	4	6 430054 812610	53
	**1605-NS2089**	OPTIBEAM SUPER CAPTAIN DUAL RAGE 600 27000 lm, 525 x 68 x 80 mm	4	6 438255 020896	53
	**1605-NS2096**	OPTIBEAM SUPER CAPTAIN ONE 600 13350 lm, 534 x 47 (59) x 65 (75) mm	8	6 438255 020964	54
	**1605-NS2086**	OPTIBEAM SUPER CAPTAIN DUAL 800 30900 lm, 769 x 68 x 73 mm	4	6 438255 020865	58
	**1605-NS2116**	OPTIBEAM SUPER CAPTAIN DUAL 800 RALLY EDITION 21300 lm, 771 x 69 x 66 mm	4	6 438255 021169	59

Product lists

OPTIBEAM

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1603-300776**	OPTIBEAM SX6, AMBER, TINTED LENS 112,6 x 28 x 9,7 mm	70	6 438255 107764	61
	**1603-300777**	OPTIBEAM SX6, BLUE, CLEAR LENS 112,6 x 28 x 9,7 mm	70	6 438255 107771	61
	**1603-300778**	OPTIBEAM SX6, RED, CLEAR LENS 112,6 x 28 x 9,7 mm	70	6 438255 107788	61
	**1603-300779**	OPTIBEAM SX6, WHITE, CLEAR LENS 112,6 x 28 x 9,7 mm	70	6 438255 107795	61
	**1608-3223**	OPTIBEAM DARK PHANTOM WARNING LIGHT, AMBER 78,5 x 26,5 mm	12	6 438255 032233	63
	**1603-300705**	OPTIBEAM DARK PHANTOM LM6 113 x 28 x 9 mm	70	6 438255 307058	61
	**1603-300758**	OPTIBEAM FLEX LM6, AMBER 126,8 x 30,2 x 10,7 mm	100	6 438255 107580	61
	**1603-300759**	OPTIBEAM FLEX LM6, BLUE 126,8 x 30,2 x 10,7 mm	100	6 438255 107597	61
	**1603-300760**	OPTIBEAM FLEX LM6, RED 126,8 x 30,2 x 10,7 mm	100	6 438255 107603	61
	**1603-300761**	OPTIBEAM VECTOR SIX 129 x 28,5 x 11,7 mm	100	6 438255 307614	61

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1603-140931**	OPTIBEAM DARK PHANTOM 400 mm	2	6 438255 409318	62
	**1603-140932**	OPTIBEAM DARK PHANTOM 600 mm	2	6 438255 409325	62
	**1603-140933**	OPTIBEAM DARK PHANTOM 800 mm	2	6 438255 409332	62
	**1603-140934**	OPTIBEAM DARK PHANTOM 1000 mm	1	6 438255 409349	62
	**1603-140935**	OPTIBEAM DARK PHANTOM 1200 mm	1	6 438255 409356	62
	**1603-140936**	OPTIBEAM DARK PHANTOM 1400 mm	1	6 438255 409363	62
	**1603-140937**	OPTIBEAM DARK PHANTOM 1600 mm	1	6 438255 409370	62
	**1603-140938**	OPTIBEAM DARK PHANTOM 1800 mm	1	6 438255 409387	62

OPTIBEAM

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1608-3200**	OPTIBEAM DARK PHANTOM TAIL LIGHT Ø 155 x 42 mm	10	6 438255 390067	63
	**1608-3201**	OPTIBEAM DARK PHANTOM TAIL LIGHT, BULK Ø 155 x 42 mm	10	6 438255 390074	63

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1608-3202**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER 79,5 x 22,5 mm	12	6 438255 390081	64
	**1608-3205**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER, BULK 79,5 x 22,5 mm	10	6 438255 390111	64
	**1608-3203**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED 79,5 x 22,5 mm	12	6 438255 390098	64
	**1608-3206**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED, BULK 79,5 x 22,5 mm	10	6 438255 390128	64
	**1608-3204**	OPTIBEAM DARK PHANTOM FRONT POSITION LIGHT, WHITE 79,5 x 22,5 mm	12	6 438255 390104	64
	**1608-3207**	OPTIBEAM DARK PHANTOM FRONT POSITION LIGHT, WHITE, BULK 79,5 x 22,5 mm	10	6 438255 390135	64

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1608-3208**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER 85,4 x 28,1 mm	12	6 438255 390142	64
	**1608-3211**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER, BULK 85,4 x 28,1 mm	10	6 438255 390173	64
	**1608-3209**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED 79,5 x 22,5 mm	12	6 438255 390159	64
	**1608-3212**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED, BULK 79,5 x 22,5 mm	10	6 438255 390180	64
	**1608-3210**	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE 79,5 x 22,5 mm	12	6 438255 390166	64
	**1608-3213**	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE, BULK 79,5 x 22,5 mm	10	6 438255 390197	64

Product lists

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1608-3100**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER 18,9 x 16,2 mm	10	6 438255 231001	64
	**1608-3103**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER, BULK 18,9 x 16,2 mm	20	6 438255 231032	64
	**1608-3101**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED 18,9 x 16,2 mm	10	6 438255 231018	64
	**1608-3104**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED, BULK 18,9 x 16,2 mm	20	6 438255 231049	64
	**1608-3102**	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE 18,9 x 16,2 mm	10	6 438255 231025	64
	**1608-3105**	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE, BULK 18,9 x 16,2 mm	20	6 438255 231056	64

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	1608-3214	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER 239,4 x 24,6 x 14,5 mm	12	6 438255 390203	65
	**1608-3217**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER, BULK 239,4 x 24,6 x 14,5 mm	12	6 438255 390234	65
	1608-3215	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED 239,4 x 24,6 x 14,5 mm	12	6 438255 390210	65
	**1608-3218**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED, BULK 239,4 x 24,6 x 14,5 mm	12	6 438255 390241	65
	1608-3216	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE 239,4 x 24,6 x 14,5 mm	12	6 438255 390227	65
	**1608-3219**	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE, BULK 239,4 x 24,6 x 14,5 mm	12	6 438255 390258	65

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1608-3220**	OPTIBEAM DARK PHANTOM SIDE MARKER LIGHT, AMBER ø 70,4 x (57,5) x 31,8 mm	10	6 438255 390265	65
	**1608-3221**	OPTIBEAM DARK PHANTOM REAR POSITION LIGHT, RED ø 70,4 x (57,5) x 31,8 mm	10	6 438255 390272	65
	**1608-3222**	OPTIBEAM DARK PHANTOM, FRONT POSITION LIGHT, WHITE ø 70,4 x (57,5) x 31,8 mm	10	6 438255 390289	65

OPTIBEAM

Optibeam Dark Phantom	Product no:	Product name	Package size	EAN	Page
	**1608-3300**	OPTIBEAM DARK PHANTOM FLEXIBLE ARM, SMALL	50	6 438255 390296	66
	**1608-3301**	OPTIBEAM DARK PHANTOM FLEXIBLE ARM, MIDDLE	50	6 438255 390302	66
	**1608-3302**	OPTIBEAM DARK PHANTOM FLEXIBLE ARM, LARGE	50	6 438255 390319	66 66
	**1608-3303**	OPTIBEAM DARK PHANTOM FLEXIBLE ARM, SMALL	50	6 438255 390326	

W-Light

W-light	Product no:	Product name	Package size	EAN	Page
	**1605-NS3869**	W-LIGHT NEPTUNE GEN 2 7600 lm, 227 x 227 (244) x 80 mm	3	6 438255 038693	48
	**1605-NS3882**	W-LIGHT PHOENIX ECE EDITION 14085 lm, 227 x 80 mm	6	6 438255 038822	48

W-light Fury	Product no:	Product name	Package size	EAN	Page
	**1605-NS3874**	W-LIGHT FURY 7 6130 lm, 177,8 x 167,8 (185) x 89,6 mm	4	6 438255 038747	46
	**1605-NS3871**	W-LIGHT FURY 9 8170 lm, Ø 225 x 85 mm	4	6 438255 038716	48
	**1605-NS3871W**	W-LIGHT FURY 9 VALKOINEN 8170 lm, Ø 225 x 85 mm	4	6 438255 238710	48

Product lists

W-Light

W-light	Product no:	Product name	Package size	EAN	Page
	**1605-NS3883**	W-LIGHT FLUX 5700 lm, 536 x 34 (50) x 68 mm	12	6 438255 038693	54
	**1605-NS3884**	W-LIGHT VORTEX 7200 lm, 555 x 54 x 58 mm	8	6 438255 038822	54

W-light Impulse	Product no:	Product name	Package size	EAN	Page
	**1605-NS3865**	W-LIGHT IMPULSE 1.2 3900 lm, 286 (294) x 36 x 58 mm	12	6 438255 038655	51
	**1605-NS3866**	W-LIGHT IMPULSE 2.1 7600 lm, 536 (544) x 36 x 58 mm	8	6 438255 038662	56
	**1605-NS3867**	W-LIGHT IMPULSE 4.2 11140 lm, 787 (795) x 36 x 58 mm	6	6 438255 038679	59

W-light	Product no:	Product name	Package size	EAN	Page
	**1605-NS3847**	W-LIGHT WAVE II FRAMELESS 6400 lm, 532 x 45 x 68 mm	6	6 438255 038471	60
	**1605-NS3848**	W-LIGHT COMBER II FRAMELESS 9200 lm, 543 x 56 x 72 mm	6	6 438255 038488	57

W-light Surge super slim	Product no:	Product name	Package size	EAN	Page
	**1605-NS3876**	W-LIGHT SURGE SUPER SLIM 8,5 4300 lm, 214 x 33 (47) x 59 mm	10	6 438255 038761	51
	**1605-NS3877**	W-LIGHT SURGE SUPER SLIM 20 8300 lm, 538 x 33 (47) x 59 mm	6	6 438255 038778	57
	**1605-NS3878**	W-LIGHT SURGE SUPER SLIM 30 12250 lm, 781 x 33 (47) x 59 mm	6	6 438255 038785	59
	**1605-NS3879**	W-LIGHT SURGE SUPER SLIM 40 15830 lm, 1024 x 33 (47) x 59 mm	6	6 438255 038792	60
	**1605-NS3880**	W-LIGHT SURGE SUPER SLIM 20 WITHOUT PARK LIGHT 8000 lm, 538 x 33 (47) x 59 mm	6	6 438255 038808	56

Ledwise	Product no:	Product name	Package size	EAN	Page
	**1700-AT781**	LEDWISE LEGEND 2 COLD	6	6 438255 007811	68
	**1700-AT782**	LEDWISE LEGEND 2 WARM	6	6 438255 007828	68
	**1700-AT787**	LEDWISE RECON 330	12	6 438255 007873	68
	**1700-AT810**	LEDWISE SCOUT GEN 2	5	6 438255 008108	68
	**1700-AT788**	LEDWISE L'ONE	6	6 438255 007880	69
	**1700-AT784**	LEDWISE SAINT	6	6 438255 007842	69
	**1700-AT789GB**	LEDWISE FLASHLIGHT, GIFT BOX	10	6 438255 077890	69
	**1700-AT780**	LEDWISE SP ECOKIT	10	6 438255 007804	69

Ledwise	Product no:	Product name	Package size	EAN	Page
	**1700-AT100**	3 M LED WORK LIGHT STRIP	10	6 438255 141003	70
	**1700-AT101**	5 M LED WORK LIGHT STRIP	10	6 438255 141010	70
	**1700-AT102**	10 M LED WORK LIGHT STRIP	10	6 438255 141027	70
	**1700-AT103**	15 M LED WORK LIGHT STRIP	4	6 438255 141034	70
	**1700-AT104**	20 M LED WORK LIGHT STRIP	4	6 438255 141041	70
	**1700-AT105**	25 M LED WORK LIGHT STRIP	4	6 438255 141058	70
	**1700-AT106**	3 M LED WORK LIGHT STRIP	2	6 438255 141065	70
	**1700-AT107**	15 M LED WORK LIGHT STRIP, REEL	2	6 438255 141072	71
	**1700-AT108**	25 M LED WORK LIGHT STRIP, REEL	2	6 438255 141089	71
	**1700-AT109**	50 M LED WORK LIGHT STRIP, REEL	1	6 438255 141096	71

Product lists

LEDWISE®

Ledwise	Product no:	Product name	Package size	EAN	Page
	**1700-AT110**	MOUNTING RAIL FOR LIGHT STRIPS	500	6 438255 141102	71
	**1700-AT111**	FASTENERS FOR LIGHT STRIPS	51	6 438255 141119	71
	**1700-AT112**	Y-SPLITTER FOR TWO LIGHT STRIPS	40	6 438255 141126	71
	**1700-AT113**	Y-SPLITTER FOR THREE LIGHT STRIPS	40	6 438255 141133	71
	**1700-AT114**	AC POWER PLUG, MAX. 50 M	20	6 438255 141140	71
	**1700-AT115**	AC POWER PLUG, MAX. 100 M	20	6 438255 141157	71

Ledwise	Product no:	Product name	Package size	EAN	Page
	**1700-AT829**	LEDWISE WORK LINE SLIM	6	6 438255 008290	72
	**1700-AT771**	LEDWISE WORK LINE HEADLAMP	10	6 438255 007712	72
	**1700-AT830**	LEDWISE WORK LINE INSPECTION HAND LAMP	6	6 438255 008306	72

Ledwise	Product no:	Product name	Package size	EAN	Page
	**1700-AT851**	LEDWISE HELMET MOUNT	5	6 438255 008511	72
	**1700-AT852**	LEDWISE VELCRO MOUNT	5	6 438255 008528	72
	**1700-AT7998**	LEDWISE 18650 BATTERY	1	6 438255 079986	72
	**1700-AT7991**	LEDWISE 26650 BATTERY	1	6 438255 008047	72
	**1700-AT7997**	LEDWISE CHARGER FOR LEGEND	1	6 438255 079979	72
	**1700-AT7999**	LEDWISE CHARGING CABLE FOR LEGEND	5	6 438255 079993	72
	**1700-AT850**	LEDWISE BATTERY CHARGER	5	6 438255 008504	72

Support bars	Product no:	Product name	Package size	EAN	Page
	**1605-NS31**	SUPPORT BAR, FLAT, CHROME 200 mm	12	6 419943 557542	73
	**1605-NS32**	SUPPORT BAR, FLAT, BLACK 200 mm	12	6 419943 357814	73
	**1605-NS32RST**	SUPPORT BAR, FLAT, STAINLESS STEEL, BLACK 200 mm	12	6 438255 210310	73
	**1605-NS33RST**	SUPPORT BAR, ROUND, STAINLESS STEEL, BLACK 200 mm	12	6 438255 210327	73

Mounts	Product no:	Product name	Package size	EAN	Page
	1605-NS58	MOUNT, Ø 32 mm	12	6 438255 020582	73
	**1605-NS50**	MOUNT, Ø 43 mm	12	6 438255 913068	73
	**1605-NS50-B**	MOUNT, Ø 43 mm, BLACK	12	6 438255 160509	73
	**1605-NS54**	MOUNT, Ø 48 mm	12	6 438255 913105	73
	**1605-NS51**	MOUNT, Ø 60 mm	12	6 438255 913075	73
	**1605-NS51-B**	MOUNT, Ø 60 mm, BLACK	12	6 438255 160516	73
	**1605-NS53**	MOUNT, Ø 63 mm	12	6 438255 913099	73
	**1605-NS53-B**	MOUNT, Ø 63 mm, BLACK	12	6 438255 160530	73
	**1605-NS57**	MOUNT, Ø 70 mm	12	6 438255 913112	73
	**1605-NS52**	MOUNT, Ø 76 mm	12	6 438255 913082	73
	**1605-NS52-B**	MOUNT, Ø 76 mm, BLACK	12	6 438255 160523	73

Product lists

Fasteners	Product no:	Product name	Package size	EAN	Page
	**1605-NS30**	COUNTERPART FOR TOP SUPPORT, suitable for NS10, NS1011, NS1010, NS20, NS2021, NS2020	1	6 438255 053306	73
	**1605-NS36**	SLIDING BRACKET, TO THE LIGHTBAR, for example NS10/NS1010	40	6 438255 053313	73

Fasteners	Product no:	Product name	Package size	EAN	Page
	**1605-NS209**	W-LIGHT FURY 9 STONE COVER	1	6 438255 012907	73

Light racks	Product no:	Product name	Package size	EAN	Page
	**1605-3022**	AUXILIARY LIGHT RACK Eu-plate	1	6 438255 030222	74
	**1605-3023**	AUXILIARY LIGHT RACK EU-plate	1	6 438255 030239	74
	**1605-3024**	AUXILIARY LIGHT RACK Eu-plate	1	6 438255 030246	74
	**1605-3025**	AUXILIARY LIGHT RACK Eu-plate	1	6 438255 030253	74
	**1605-3028**	AUXILIARY LIGHT RACK Eu-plate	1	6 438255 030284	74
	**1605-3030**	AUXILIARY LIGHT RACK Eu-plate	1	6 438255 030307	74
	**1605-3036**	AUXILIARY LIGHT RACK 389 mm	1	6 438255 030369	74
	**1605-3037**	AUXILIARY LIGHT RACK 460 mm, EU-plate	1	6 438255 030376	74
	**1605-3038**	AUXILIARY LIGHT RACK Eu-plate	1	6 438255 030383	74
	**1605-3065**	AUXILIARY LIGHT RACK For Optibeam Pure 506	1	6 438257 030657	74
	**1605-3064**	AUXILIARY LIGHT RACK For Optibeam Super Captain One 600	1	6 438256 030641	74
	**1605-3049**	AUXILIARY LIGHT RACK For Optibeam Super Captain Dual 600	1	6 438255 030499	74

Connection kits	Product no:	Product name	Package size	EAN	Page
	**1605-WK031**	SET 1 For 1 auxiliary light with DT 2 -connection	1	6 438255 400315	76
	**1605-WK032**	SET 2 For 2 auxiliary lights with 2 x DT 2 –connection	1	6 438255 400322	76
	**1605-WK034**	SET 4 For 1 auxiliary light with parking light and DT 3 -connection	1	6 438255 400346	76
	**1605-WK035**	SET 5 For 1 auxiliary light with DTP 2 -connection	1	6 438255 400353	76
	**1605-WK036**	SET 6 For 2 auxiliary lights with 2 x DTP 2 -connection	1	6 438255 400360	76
	**1605-WK043**	SET 10 For 3 auxiliary lights with parking light and 3 x DT 3 -connection	1	6 438255 400438	77
	**1605-WK044**	SET 11 For 1 auxiliary light with DTP 4 -plug	1	6 438255 400445	77
	**1605-WK046**	SET 13 For 3 auxiliary lights with 3 x DT 4 -plug	1	6 438255 400469	77
	**1605-WK048**	SET 14 For 1 auxiliary light with DT 4 -plug	1	6 438255 400483	77
	**1605-WK055**	SET15 For 2 auxiliary lights with 2 x DTP 4 -plug	1	6 438255 400551	77

	Product no:	Product name	Package size	EAN	Page
	**1605-WK200**	OPTIBEAM SWITHC PANEL	10	6 438255 302008	75
	**1605-WK201**	OPTIBEAM SWITCH PANEL FOR 8 DEVICES		6 438255 302015	75
	**1605-WK202**	OPTIBEAM SWITCH PANEL FOR 4 DEVICES		6 438255 302022	75
	**1605-WK050**	SET A DT 2 -extension cable	1	6 438255 400506	75
	**1605-WK051**	SET B DTP 2 -extension cable	1	6 438255 400513	75
	**1605-WK052**	SET C Switch set for auxiliary lamps	1	6 438255 400520	75
	**1605-WK047**	DT3 - DT3 extension cable 2m	1	6 438255 400476	75

Product lists

Connection kits	Product no:	Product name	Package size	EAN	Page
	**1605-WK018**	AUTOLINE CONNECTION KIT For one light, 1 x DT 2	30	6 438255 400186	78
	1605-WK099	AUTOLINE CONNECTION KIT For one light, 1 x DT 2	30	6 438255 400995	78
	**1605-WK021**	AUTOLINE CONNECTION KIT For one light, 1 x DTP 2	30	6 438255 400216	78
	**1605-WK062**	AUTOLINE CONNECTION KIT For one light, 1 x DT 3	30	6 438255 400629	78
	**1605-WK063**	AUTOLINE CONNECTION KIT For one light, 1 x DTP 4	30	6 438255 400636	78
	**1605-WK068**	AUTOLINE CONNECTION KIT For one light, 1 x DT 4	30	6 438255 400681	78
	**1605-WK069**	AUTOLINE CONNECTION KIT For one light, open cable ends	30	6 438255 400698	78
	**1605-WK005L**	AUTOLINE CONNECTION KIT For two lights, 2 x blade terminals	30	6 438255 400056	79
	**1605-WK023**	AUTOLINE CONNECTION KIT For two lights, 2 x DT 2	30	6 438255 400230	79
	**1605-WK022**	AUTOLINE CONNECTION KIT WITH REMOTE CONTROL For two lights, 2 x blade terminals	30	6 438255 400223	79
	**1605-WK020**	AUTOLINE CONNECTION KIT For two lights, 2 x blade terminals	30	6 438255 400209	79
	**1605-WK064**	AUTOLINE CONNECTION KIT For two lights, 2 x DT 4	30	6 438255 400643	79
	**1605-WK065**	AUTOLINE CONNECTION KIT For three lights, 3 x DT 4	30	6 438255 400650	79
	1605-WK066	AUTOLINE CONNECTION KIT For three lights, 3 x DT 2	30	6 438255 400667	79

	Product no:	Product name	Package size	EAN	Page
	**1605-WK096**	XBB POWER UNIT 6	1	7 350124 090122	80
	**1605-WK097**	XBB DONGLE	1	7 350124 090023	80
	**1605-WK070**	DONGLE KIT	1	6 438255 400704	80
	**1605-WK009**	CONTACTLESS READER	1	6 438255 000096	80
	**1605-WK089**	LED CONTROL UNIT	1	6 438255 400896	80
	**1605-WK084**	CAN BUS INTERFACE	1	6 438255 400841	80
	**1605-WK008**	CAN BUS RELAY	1	6 438255 400087	80
	**1605-WK016**	CAN BUS INTERFACE		6 438255 400162	80
	**1605-WK088**	CONNECTION KIT, OBD TESLA		6 438255 400889	80
	**1605-WK071**	OBD-II Y-CABLE	1	6 438255 400711	80
	**1605-WK070-1**	EXTRA POWER UNIT RELAY FOR DONGLE	1	6 438255 507014	80
	**1605-WK078**	XBB SMART BUTTON	1	7 350124 090092	80
	**1608-1016**	INTERFERENCE ELIMINATOR	40	6 419943 589727	80
	**1605-WK067**	AUTOLINE CONNECTION KIT FOR XBB-RELAY	30	6 438255 400674	80



STARTAX

Kannistontie 138, 33880 Lempäälä

startaxfinland