

# SW830-2

## Multi-purpose Switch



### FEATURES

- 7 switches control panel with 3 x 0.2Amp and 4 x 0.1Amp outputs for auxiliary device power or function activation.
- 1 Programable Short Cut Button for quick activation of pre-set buttons.
- Backlit rubber touch buttons.
- Fully programable buttons in ON/OFF or momentary switch mode.
- European Siren Interlock compatible.
- 10 LED signal indicator for your lightbar or traffic director.
- 35 selectable icon stickers to clearly label your panel.

### SPECIFICATIONS

**Approval:** ECE R10

**Operating Voltage:** 10~24VDC

**Input Current:** max 1.2A / min 0.01A

**Output Voltage:** 10~24VDC

**Output Current:** max 0.2A x 3 ports /  
max 0.1A x 4 ports

**Fuse Recommended:** 1.5A @ Input

**Storage Temperature:** -40°C ~ 75°C

**Operating Temperature:** -30°C ~ 65°C

**Cable:** 120cm (22AWG) x 10 wires

### RECOMMENDED RELAY SPECIFICATION (USER-SUPPLIED)

**Input Voltage:** 10~24 VDC


**Input Current:** < 200mA

### PART NO.

- A03-22130-00R (8 SWITCH W/O RELAY, 1.2M CABLE, ECE R10)
- A03-22030-00R (8 SWITCH W/O RELAY, 1.2M CABLE)

### DIMENSIONS

#### Control Panel

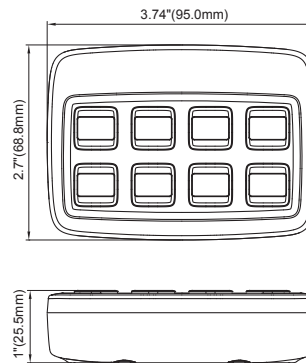

### ICON STICKER

